

# A Novel Technique for Fault-Tolerant Control of SinglePhase Induction Motor

*By* Muhammad Jannati

## A Novel Technique for Fault-Tolerant Control of Single-Phase Induction Motor

Muhamad Jannati<sup>1</sup>, Tole Sutikno<sup>2</sup>, Nik Ruzmi Nik Idris<sup>3</sup>, Mohd Junaidi Abdul Aziz<sup>4</sup>

<sup>1,3,4</sup>UTM-PROTON Future Drive Laboratory, Faculty of Electrical Engineering, Universiti Teknologi Malaysia, 81310 Skudai, Johor Bahru, Malaysia

<sup>2</sup>Department of Electrical Engineering, Universitas Ahmad Dahlan, Yogyakarta, Indonesia

\*Corresponding author, e-mail: jannatim94@yahoo.com<sup>1</sup>, tole@ee.uad.ac.id<sup>2</sup>

### Abstract

This research discusses about vector control of single-phase Induction Motor (IM) with two main and auxiliary windings under stator winding open-phase fault based on Indirect Rotor Flux-Oriented Control (IRFOC). Unlike conventional controller which can only be used for single-phase IM with two windings, the proposed technique in this paper can also be used for single-phase IM under open-phase fault. The proposed fault-tolerant drive system in this paper is based on  $\alpha\beta$  transformation matrix. Simulations results confirm the validity of the theoretical analysis, shown that the performance of the proposed scheme is highly satisfactory for controlling both healthy and faulty.

**Keywords:** fault-tolerant control, single-phase induction motor, open-phase fault, indirect rotor flux-oriented control, transformation matrix

Copyright © 2015 Universitas Ahmad Dahlan. All rights reserved.

### 1. Introduction

Single-phase Induction Motor (IM) is one the most commonly IMs which is used in washing machines, drills, compressors, refrigerators, pumps, dryers and many other applications. A single-phase IM is principally an unbalanced IM since it is constructed with two unequal main and auxiliary windings [1].

AC drives of single-phase IM demonstrate better performance, lower protection, improved reliability and are cost-benefit in comparison with their DC counterparts [2, 3]. In the literature, numerous studies have been conducted on Variable Frequency Control (VFC) techniques of single-phase IM drives such as scalar and vector control techniques. These control techniques assure energy saving, improved efficiency, decrease in torque response pulsation and etc [4-8]. Recent research trend on IM is toward vector control of single-phase IMs or unbalanced two-phase IMs [9-22]. Generally, in all proposed vector control methods for single-phase IMs, the start-up and running capacitors are disregarded and single-phase IM is considered as an asymmetric 2-phase IM. Use of hysteresis current controller for Field-Oriented Control (FOC) of unbalanced 2-phase IM has been suggested in [9]. In [10], FOC technique for a single-phase IM with current double sequence controller for decreasing the torque pulsation has been proposed. Using current double sequence controller is a complex controller due to using many PI controllers. To solve problems in [9, 10], in [11, 12], decoupling vector control for single-phase IM has been presented. In [11, 12], by introducing two new decoupling signals in addition to the decoupling signals like ones used in 3-phase IM, a novel technique for vector control of single-phase IM based on FOC has been proposed. However, decoupling vector control technique depends on variation of single-phase IM parameters. In [13-22], some methods for high performance FOC of single-phase IM or unbalanced 2-phase IM have been presented which can be listed as follows; In [13-16], speed sensorless Indirect FOC (IFOC) of 2-phase IM using Extended Kalman Filter (EKF), in [17], Model Reference Adaptive System (MRAS) observer for rotor speed estimation, in [18], sensorless FOC of single-phase IM with on line stator resistance estimation, in [19, 20], two techniques for speed sensorless IFOC of unbalanced 2-phase IM based on motor model, in [21], FOC of 2-phase IM using Genetic Algorithm (GA) for speed PI controller tuning and in [22], Virtual High Frequency Injection Method (VHFIM) to determine the speed and position in IFOC of 2-phase IM have been presented.

Reliability of an electrical drive has been always a most important concern in many industrial and critical applications. In these applications, an appropriate control strategy must be capable of managing the drive system during the fault conditions. In spite of good performance of conventional vector control methods for single-phase IM drives, its ability in controlling faulty single-phase IMs is unsatisfactory. To overcome this problem, a novel vector control method for single-phase IM is proposed in this paper. The new vector control technique which is based on FOC, is suitable for both healthy single-phase IM drives and single-phase IMs when works with just main winding. MATLAB simulation results show that the performance of the proposed scheme is highly satisfactory for controlling healthy and faulty single-phase IM.

## 2. d-q Model of Single-Phase IM with Two Main and Auxiliary Windings

The single-phase IM d-q equations with two different main and auxiliary windings in the stationary reference frame can be shown as following equations [9] (in this paper superscript "s" indicates that the variables are in the stationary reference frame):

Stator and rotor voltage equations:

$$\begin{bmatrix} V_{ds}^s \\ V_{qs}^s \\ 0 \\ 0 \end{bmatrix} = \begin{bmatrix} R_{ds} + L_{ds} \frac{d}{dt} & 0 & M_{ds} \frac{d}{dt} & 0 \\ 0 & R_{qs} + L_{qs} \frac{d}{dt} & 0 & M_{qs} \frac{d}{dt} \\ M_{ds} \frac{d}{dt} & \omega_r M_{qs} & R_r + L_r \frac{d}{dt} & \omega_r L_r \\ -\omega_r M_{ds} & M_{qs} \frac{d}{dt} & -\omega_r L_r & R_r + L_r \frac{d}{dt} \end{bmatrix} \begin{bmatrix} i_{ds}^s \\ i_{qs}^s \\ i_{dr}^s \\ i_{qr}^s \end{bmatrix} \quad (1)$$

Stator and rotor flux equations:

$$\begin{bmatrix} \lambda_{ds}^s \\ \lambda_{qs}^s \\ \lambda_{dr}^s \\ \lambda_{qr}^s \end{bmatrix} = \begin{bmatrix} L_{ds} & 0 & M_{ds} & 0 \\ 0 & L_{qs} & 0 & M_{qs} \\ M_{ds} & 0 & L_r & 0 \\ 0 & M_{qs} & 0 & L_r \end{bmatrix} \begin{bmatrix} i_{ds}^s \\ i_{qs}^s \\ i_{dr}^s \\ i_{qr}^s \end{bmatrix} \quad (2)$$

Electromagnetic torque equations:

$$\tau_e = \frac{Pole}{2} (M_{qs} i_{qs}^s i_{dr}^s - M_{ds} i_{ds}^s i_{qr}^s) \\ \frac{Pole}{2} (\tau_e - \tau_l) = J \frac{d\omega_r}{dt} + F\omega_r \quad (3)$$

Where,  $V_{ds}^s$ ,  $V_{qs}^s$ ,  $i_{ds}^s$ ,  $i_{qs}^s$ ,  $i_{dr}^s$ ,  $i_{qr}^s$ ,  $\lambda_{ds}^s$ ,  $\lambda_{qs}^s$ ,  $\lambda_{dr}^s$  and  $\lambda_{qr}^s$  are the d-q axes voltages, currents, and fluxes of the stator and rotor.  $R_{ds}$ ,  $R_{qs}$  and  $R_r$  denote the stator and rotor resistances.  $L_{ds}$ ,  $L_{qs}$ ,  $L_r$ ,  $M_{ds}$  and  $M_{qs}$  denote the stator and the rotor self and mutual inductances.  $\omega_r$  is the machine speed.  $\tau_e$ ,  $\tau_l$ ,  $J$  and  $F$  are electromagnetic torque, load torque, inertia and viscous friction coefficient.

## 3. d-q Model of Single-Phase IM with One Winding (Faulty Single-Phase IM)

Modeling of engineering systems has been subject of attention of many researchers within the last decades (e.g. [23, 24]). In this paper, the single-phase IM model with only main winding based on d-q model is presented (it is assumed that a phase cut-off fault occurred in the auxiliary winding of single-phase IM). Stator a-axis (main winding) and d-q axes can be shown as Figure 1 (in this Figure, " $f_{as}$ " can be flux, voltage or current).




Figure 1. Stator a-axis and d-q axes

28

In this Figure  $\theta_o$  is the angle between stator a-axis and stator q-axis. Based on Figure 1, d-q variables for stator can be shown as:

$$d_s = f_{as} \sin \theta_o, \quad q_s = f_{as} \cos \theta_o \quad (4)$$

Since the d and q axes are orthogonal, therefore their inner product should be equal to zero. So,

$$\sin \theta_o \cos \theta_o = 0 \Rightarrow \theta_o = 0 \text{ or } \frac{\pi}{2} \quad (5)$$

If we consider  $\theta_o=0$ , the transformation matrix for stator variables is obtained as:

$$\begin{bmatrix} d_s \\ q_s \end{bmatrix} = [T_s] [f_a] = \begin{bmatrix} 0 \\ 1 \end{bmatrix} [f_a] \quad (6)$$

Therefore, the d-q model of single-phase IM under open-phase fault is obtained as follows:

*Stator and rotor voltage equations:*

$$\begin{bmatrix} 0 \\ v_{qs}^s \\ 0 \\ 0 \end{bmatrix} = \begin{bmatrix} 0 & 0 & 0 & 0 \\ 0 & R_{qs} + L_{qs} \frac{d}{dt} & 0 & M_{qs} \frac{d}{dt} \\ 0 & \omega_r M_{qs} & R_r + L_r \frac{d}{dt} & \omega_r L_r \\ 0 & M_{qs} \frac{d}{dt} & -\omega_r L_r & R_r + L_r \frac{d}{dt} \end{bmatrix} \begin{bmatrix} 0 \\ i_{qs}^s \\ i_{dr}^s \\ i_{qr}^s \end{bmatrix} \quad (7)$$

*Stator and rotor flux equations:*

$$\begin{bmatrix} 0 \\ \lambda_{qs}^s \\ \lambda_{dr}^s \\ \lambda_{qr}^s \end{bmatrix} = \begin{bmatrix} 0 & 0 & 0 & 0 \\ 0 & L_{qs} & 0 & M_{qs} \\ 0 & 0 & L_r & 0 \\ 0 & M_{qs} & 0 & L_r \end{bmatrix} \begin{bmatrix} 0 \\ i_{qs}^s \\ i_{dr}^s \\ i_{qr}^s \end{bmatrix} \quad (8)$$

*Electromagnetic torque equations:*

$$\tau_e = \frac{Pole}{2} M_{qs} i_{qs}^s i_{dr}^s$$

$$\frac{Pole}{2} (\tau_e - \tau_l) = J \frac{d\omega_r}{dt} + F \omega_r \quad (9)$$

As can be seen from Equation (7)-(9), the structure of the single-phase IM under open-phase fault is similar to the structure of the single-phase IM with two main and auxiliary windings. The only difference between these two types of motors is the motor parameters. In the single-phase IM under open-phase fault it is obtained:  $L_{ds}=M_{ds}=R_{ds}=0$  but in the healthy single-phase IM:  $L_{ds} \neq L_{qs}$ ,  $M_{ds} \neq M_{qs}$  and  $R_{ds} \neq R_{qs}$ .

In the next section, a vector control system based on Rotor FOC (RFOC) for healthy single-phase IM is presented. It is obvious by substituting  $L_{ds}=M_{ds}=R_{ds}=0$ , this control system can be used for faulty single-phase IM.

#### 4. Proposed Method for Vector Control of Single-Phase IM based on RFOC

In this section, using transformation matrix, a method for vector control of single-phase IM is presented. The reason of using this transformation matrix is changing the unbalanced equations of the single-phase IM (due to the  $L_{ds} \neq L_{qs}$ ,  $M_{ds} \neq M_{qs}$  and  $R_{ds} \neq R_{qs}$ ) to the balanced equations.

##### 4.1. Transformation Matrix for Stator Current Variables

The idea of using this transformation matrix is obtained from equivalent circuit of the single-phase IM. Figure 2 shows the equivalent circuit of single-phase IM.

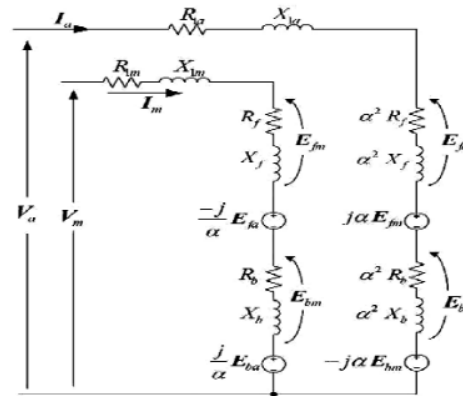


Figure 2. Equivalent circuit of single-phase IM

All the parameters in Figure 2, have been defined in Appendix. It can be shown that using following definitions,

$$\begin{aligned} I_1 &= -j\alpha I_a + I_m \\ V_1 &= Z_3 V_m + jZ_4 V_a \end{aligned} \quad (10)$$

Figure 2 can be simplified as Figure 3 (see Appendix).




Figure 3. Simplified equivalent circuit of single-phase IM

In Figure 3,

$$Z = \left( \frac{(Z_3 + Z_4)(Z_{lm} + 2Z_f)}{2} + \frac{(Z_3 + Z_4)(-\alpha Z_{lm} + jZ_{la} + 2\alpha Z_f(\alpha j - 1))(Z_{lm} + 2Z_b)}{2(\alpha Z_{lm} + jZ_{la} + 2\alpha Z_b(\alpha j + 1))} \right) \quad (11)$$

In (11),  $Z_3$  and  $Z_4$  are the parameters in terms of inductances ( $L_{ds}$  and/or  $L_{qs}$  and/or  $M_{ds}$  and/or  $M_{qs}$ ). As can be seen using (10), the equivalent circuit of single-phase IM (Figure 2) changed into a balanced circuit (Figure 3). Equation (10) can be re-written as follows:

$$\begin{cases} jI_1 = \frac{N_a}{N_m} I_a + jI_m \\ I_1 = -j \frac{N_a}{N_m} I_a + I_m \end{cases} \quad (12)$$

And,

$$\begin{cases} jV_1 = -Z_4 V_a + jZ_3 V_m \\ V_1 = jZ_4 V_a + Z_3 V_m \end{cases} \quad (13)$$

Equation (12) and (13) are transformation matrices for transformation of variables from unbalanced set (eg., Figure 2) to the balanced set (eg., Figure 3). Based on (12) and (13), following transformation matrices for stator voltage and current variables can be derived:

*Transformation matrix for stator voltage variables:*

$$\begin{bmatrix} v_{ds}^e \\ v_{qs}^e \end{bmatrix} = [T_{vs}^e] \begin{bmatrix} v_{ds}^s \\ v_{qs}^s \end{bmatrix} = \begin{bmatrix} -Z_4 \cos \theta_e & Z_3 \sin \theta_e \\ Z_4 \sin \theta_e & Z_3 \cos \theta_e \end{bmatrix} \begin{bmatrix} v_{ds}^s \\ v_{qs}^s \end{bmatrix} \quad (14)$$

2

*Transformation matrix for stator current variables:*

$$\begin{bmatrix} i_{ds}^e \\ i_{qs}^e \end{bmatrix} = [T_{is}^e] \begin{bmatrix} i_{ds}^s \\ i_{qs}^s \end{bmatrix} = \begin{bmatrix} \frac{M_{ds}}{M_{qs}} \cos \theta_e & \sin \theta_e \\ -\frac{M_{ds}}{M_{qs}} \sin \theta_e & \cos \theta_e \end{bmatrix} \begin{bmatrix} i_{ds}^s \\ i_{qs}^s \end{bmatrix} \quad (15)$$

35 To obtain (14) and (15), following substituting have been considered (in (14) and (22) superscript "e" indicates that the variables are in the rotating reference frame. Moreover, " $\theta_e$ " is the angle between the stationary reference frame and the rotor flux oriented reference frame).

$$\begin{aligned} j &\rightarrow \sin \theta_e, 1 \rightarrow \cos \theta_e, \frac{N_m}{N_a} = \frac{M_{qs}}{M_{ds}}, jV_1 \rightarrow v_{ds}^e, V_1 \rightarrow v_{qs}^e \\ V_a &\rightarrow v_{ds}^s, V_m \rightarrow v_{qs}^s, jI_1 \rightarrow i_{ds}^e, I_1 \rightarrow i_{qs}^e, I_a \rightarrow i_{ds}^s, I_m \rightarrow i_{qs}^s \end{aligned} \quad (16)$$

It is expected by using (14) and (15) the unbalanced equations of single-phase IM become similar to the balanced equations.

#### 4.2. Equations of RFOC for Single-Phase IM Based on Proposed Method

In this section vector control equations of single-phase IM based RFOC is presented. Using (15) and after simplifying, the equations of single-phase IM are obtained as follows:

3

*A Novel Technique for Fault-Tolerant Control of Single-Phase IM (M. Jannati)*

Rotor voltage equations:

$$\begin{aligned} \begin{bmatrix} T_s^e \\ 0 \end{bmatrix} &= \begin{bmatrix} M_{ds} \frac{d}{dt} & \omega_r M_{qs} \\ -\omega_r M_{ds} & M_{qs} \frac{d}{dt} \end{bmatrix} \begin{bmatrix} T_{is}^e \\ T_{is}^e \end{bmatrix}^{-1} \begin{bmatrix} i_{ds}^s \\ i_{qs}^s \end{bmatrix} \\ &+ \begin{bmatrix} R_r + L_r \frac{d}{dt} & \omega_r L_r \\ -\omega_r L_r & R_r + L_r \frac{d}{dt} \end{bmatrix} \begin{bmatrix} T_s^e \\ T_s^e \end{bmatrix}^{-1} \begin{bmatrix} i_{dr}^s \\ i_{qr}^s \end{bmatrix} \end{aligned} \quad (17)$$

After simplifying Equation (17) can be written as:

$$\begin{aligned} \begin{bmatrix} 0 \\ 0 \end{bmatrix} &= \begin{bmatrix} M_{qs} \frac{d}{dt} & (\omega_r - \omega_e) M_{qs} \\ -(\omega_r - \omega_e) M_{qs} & M_{qs} \frac{d}{dt} \end{bmatrix} \begin{bmatrix} i_{ds}^e \\ i_{qs}^e \end{bmatrix} \\ &+ \begin{bmatrix} R_r + L_r \frac{d}{dt} & (\omega_r - \omega_e) L_r \\ -(\omega_r - \omega_e) L_r & R_r + L_r \frac{d}{dt} \end{bmatrix} \begin{bmatrix} i_{dr}^e \\ i_{qr}^e \end{bmatrix} \end{aligned} \quad (18)$$

Electromagnetic torque equation:

$$\begin{aligned} \tau_e &= \frac{Pole}{2} (M_{qs} i_{qs}^s i_{dr}^s - M_{ds} i_{ds}^s i_{qr}^s) = \frac{Pole}{2} \begin{bmatrix} i_{dr}^s & i_{qr}^s \end{bmatrix} \begin{bmatrix} 0 & M_{qs} \\ -M_{ds} & 0 \end{bmatrix} \begin{bmatrix} i_{ds}^s \\ i_{qs}^s \end{bmatrix} \\ &= \left( \frac{Pole}{2} \begin{bmatrix} i_{dr}^s & i_{qr}^s \end{bmatrix} \begin{bmatrix} T_s^e \\ T_s^e \end{bmatrix}^{-1} \begin{bmatrix} T_s^e \\ T_s^e \end{bmatrix} \right)^T \begin{bmatrix} 0 & M_{qs} \\ -M_{ds} & 0 \end{bmatrix} \begin{bmatrix} T_{is}^e \\ T_{is}^e \end{bmatrix}^{-1} \begin{bmatrix} i_{ds}^s \\ i_{qs}^s \end{bmatrix} \end{aligned} \quad (19)$$

After simplifying Equation (19) can be written as:

$$\tau_e = \frac{Pole}{2} M_{qs} (i_{qs}^e i_{dr}^e - i_{ds}^e i_{qr}^e) \quad (20)$$

In summary based on Equation (17)-(20), equations of RFOC for single-Phase IM are obtained as following equations. In the process of obtaining these equations the assumption  $\lambda_{dr}^e = \lambda_r$  and  $\lambda_{qr}^e = 0$  is considered (in RFOC method, the rotor flux vector is aligned with d-axis;  $\lambda_{dr}^e = \lambda_r$  and  $\lambda_{qr}^e = 0$ ):

$$|\lambda_r| = \frac{M_{qs} i_{ds}^e}{1 + T_r \frac{d}{dt}} \quad (21)$$

$$\tau_e = \frac{Pole}{2} |\lambda_r| \frac{M_{qs}}{L_r} i_{qs}^e \quad (22)$$

$$\omega_e = \omega_r + \frac{M_{qs} i_{qs}^e}{T_r |\lambda_r|} \quad (23)$$



In Equation (21),  $T_r$  is rotor time constant ( $T_r = L_r/R_r$ ). As can be seen from equations (21)-(23) the structure of RFOC equations of single-phase IM using proposed transformation matrix for stator current variables, become like balanced equations.

Consequently, Figure 4 is proposed for IRFOC of single-phase IM. As mentioned before, by substituting  $L_{ds}=M_{ds}=R_{ds}=0$ , this control system can be used for faulty single-phase IM. In This Figure, 2 to 2 transformation matrix for stator currents is as follows:

$$\begin{bmatrix} i_{as} \\ i_{bs} \end{bmatrix} = \begin{bmatrix} 1 & 0 \\ 0 & 1 \end{bmatrix} \begin{bmatrix} i_{ds}^s \\ i_{qs}^s \end{bmatrix} \quad (24)$$

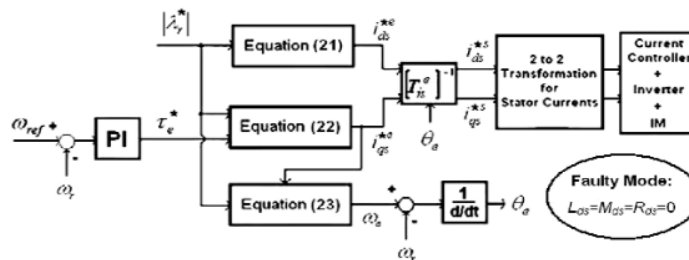


Figure 4. Block diagram of proposed IRFOC for both healthy and faulty single-phase IM

## 5. Simulation Results

To evaluate the effectiveness of the proposed controller for vector control of healthy and faulty single-phase IM, simulation is conducted using MATLAB simulation package. The simulated single-phase IM is fed by two-leg Voltage Source Inverter (VSI) as used in [9]. The d-q model based on Equation (1)-(3) and (7)-(9) has been used for healthy and faulty single-phase IM respectively. The Runge-Kutta algorithm is used to solve dynamic equations of single-phase IM under healthy and faulty conditions. Moreover, a controller system based on Figure 4 is considered for vector control of both single-phase IM when work with one (faulty single-phase IM) and two windings (healthy single-phase IM). In all simulations a phase cut-off is occurred in auxiliary winding. The proposed drive system is tested under various operating conditions namely, healthy and faulty conditions and variations of load torque and reference speed. In this paper, immediate fault detection is assumed as considered in [25]. The parameters of the simulated machine are as follows:

Voltage: 110 V,  $f = 50$  Hz, No. of poles = 4, Power = 475 Watt,  $J = 0.0038$  kg.m<sup>2</sup>,  $R_{ds} = 20.6$  Ω,  $R_{qs} = 6.2$  Ω,  $L_r = L_s = 0.0814$  H,  $R_r = 19.15$  Ω,  $L_{ms} = 0.851$  H,  $L_{ds} = 1.28$  H,  $L_{qs} = 0.43$  H

Figure 5 shows the simulation results of the proposed controller for single-phase IM under healthy and faulty conditions. In this Figure, from  $t=0$ s to  $t=2$ s, the single-phase IM works with two main and auxiliary windings and from  $t=2$ s to  $t=7$ s, the single-phase IM works with only main winding. Moreover, at  $t=2.5$ s, a step load torque equal to 0.1N.m is applied. Figure 5(c) and 5(d) show the electromagnetic torque of the single-phase IM. It can be seen that the electromagnetic torque has a quick response with no pulsations in both healthy and faulty conditions. Figure 5(e), 5(f) and 5(g) show the reference and real motor speed, when the speed reference varied from 500rpm to 450rpm. It is obvious from these Figures that the single-phase IM can follow the reference speed without any overshoot and steady-state error even under load. Based on Figure 5, the maximum error between reference and real speed in the healthy condition and at steady state is ~ 0.2rpm and the maximum error in the faulty condition after applying load and at steady state is ~ 5rpm. From the presented simulation results of Figure 5 it can be seen that the dynamic performance of the proposed IRFOC drive system for vector control of single-phase IM under healthy and faulty conditions are acceptable.



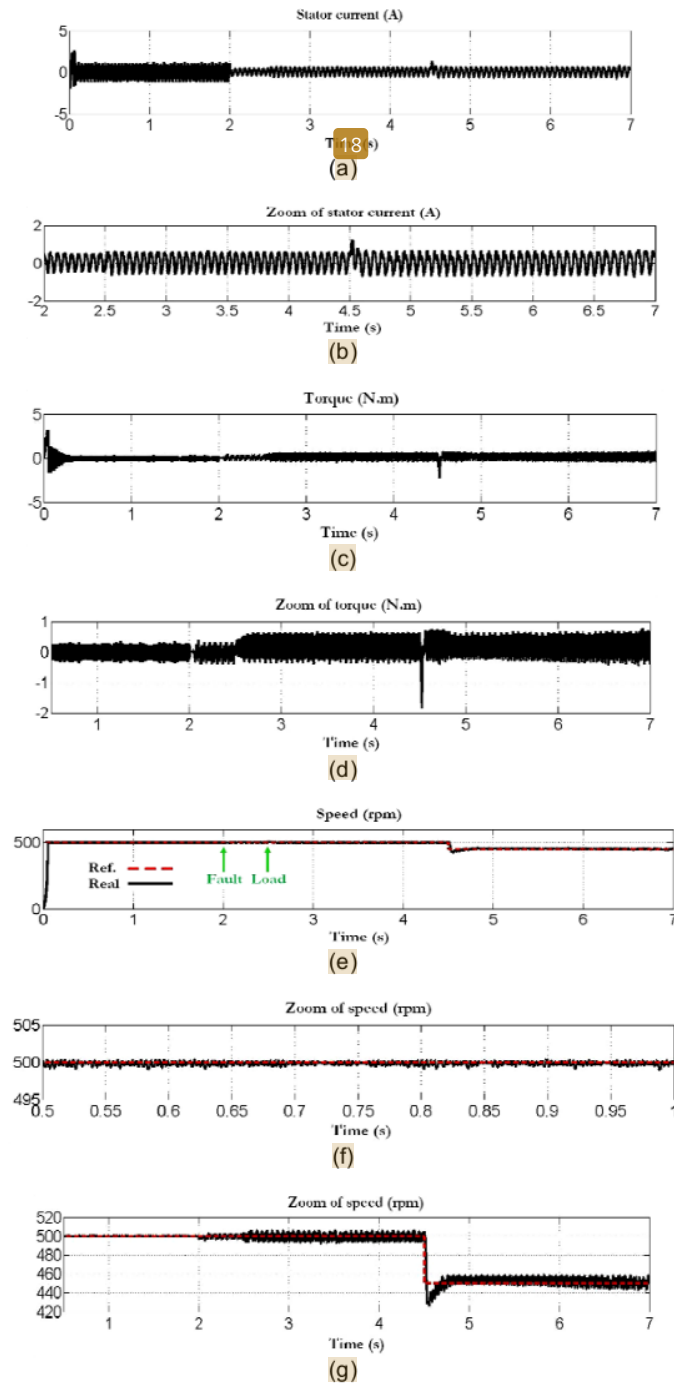


Figure 5. Simulation results of the proposed controller; (a) Stator current, (b) Zoom of stator current, (c) Torque, (d) Zoom of torque, (e) Speed, (f) Zoom of speed in the normal condition, (g) Zoom of speed in the faulty condition

## 6. Conclusion

In this paper, a new scheme for vector control of healthy and faulty single-phase IM (open-phase fault) has been presented. A novel single-phase IM model with one and two windings based on d-q model has been developed to provide a useful solution to apply FOC technique to control the single-phase IM under normal and open-phase fault conditions. Simulation results have validated the proposed methodology. The performance of the proposed scheme is highly satisfactory for controlling both healthy and faulty single-phase IM. In future research, the other fault conditions will be addressed. Experimental results will be carried out to emphasize the simulation results, which are so far acceptable.

## Appendix

Based on Figure 2, the stator main and auxiliary voltages can be written as:

$$V_m = Z_{lm} I_m + E_{fm} - \frac{j}{\alpha} E_{fa} + E_{bm} + \frac{j}{\alpha} E_{ba}$$

$$V_a = Z_{la} I_a + E_{fa} + j\alpha E_{fm} + E_{ba} - j\alpha E_{bm}$$

Where:

$$E_{fm} = Z_f I_m, E_{fa} = \alpha^2 Z_f I_a, E_{bm} = \alpha^2 Z_b I_m, E_{ba} = \alpha^2 Z_b I_a$$

$$Z_f = R_f + jX_f, Z_b = R_b + jX_b$$

$$Z_{lm} = R_{lm} + jX_{lm}, Z_{la} = R_{la} + jX_{la}$$

In Figure 2,  $V_m$ ,  $V_a$ ,  $I_m$  and  $I_a$  are the main and auxiliary voltages and currents,  $a=N_a/N_m$  and  $j$  is the turn ratio and square root of "-1".  $E_{bm}$ ,  $E_{ba}$ ,  $E_{fm}$  and  $E_{fa}$  are the backward and forward voltage of magnetizing branch of the main and auxiliary windings.  $R_{lm}$ ,  $R_{la}$ ,  $X_{lm}$  and  $X_{la}$  are the leakage resistance and inductance of the main and auxiliary winding. Moreover,  $R_f$ ,  $R_b$ ,  $X_f$  and  $X_b$  are the forward and backward stator resistance and inductance. Using following change of variables,

$$I_m = \frac{1}{2}(I_1 + I_2), I_a = \frac{j}{2\alpha}(I_1 - I_2)$$

Ratio of current is obtained as following equations:


$$\frac{I_m}{I_a} = \frac{Z_{la} + \alpha^2(Z_f + Z_b) + j\alpha(Z_f - Z_b)}{Z_{lm} + Z_f + Z_b - j\alpha(Z_f - Z_b)}$$

$$\frac{I_1}{I_2} = \frac{\alpha Z_{lm} + jZ_{la} + 2\alpha Z_b(\alpha j + 1)}{-\alpha Z_{lm} + jZ_{la} + 2\alpha Z_f(\alpha j - 1)}$$

Let us assumed:

$$V_1 = Z_3 V_m + jZ_4 V_a$$

Consequently, Figure 2 can be simplified as Figure 3.



where:

$$Z = \left( \frac{(Z_3 + Z_4)(Z_{lm} + 2Z_f)}{2} + \frac{(Z_3 + Z_4)(-\alpha Z_{lm} + jZ_{la} + 2\alpha Z_f(\alpha j - 1))(Z_{lm} + 2Z_b)}{2(\alpha Z_{lm} + jZ_{la} + 2\alpha Z_b(\alpha j + 1))} \right)$$

## References

- [1] HW Beatty, JH Kirtley. Electric Motor Handbook. New York: McGraw-Hill. 1998.
- [2] AS Ba-Thunya, R Khopkar, K Wei, HA Toliyat. *Single phase induction motor drives-a literature survey*. In Electric Machines and Drives Conference, IEMDC 2001. 2001: 911-916.
- [3] F Blaabjerg, F Lugeanu, K Skaug, M Tonnes. Two-phase induction motor drives. *IEEE Industry Applications Magazine*. 2004; 10(4): 24-32.
- [4] ER Collins. Torque and slip behavior of single-phase induction motors driven from variable-frequency supplies. *IEEE Transactions on Industry Applications*. 1992; 28(3): 710-715.
- [5] B Zahedi, S Vaez-Zadeh. Efficiency optimization control of single-phase induction motor drives. *IEEE Transactions on Power Electronics*. 2009; 24(4): 1062-1070.
- [6] J Schraud, EF Fuchs, HA Fuchs. Experimental verification of critical-speed increase of single-phase induction machines via winding reconfiguration with solid-state switches. *IEEE Transactions on Energy Conversion*. 2008; 23(2): 460-465.
- [7] M Jannati, NRN Idris, MJA Aziz, SH Asgari, A Monadi, AAM Faudzi. *A new method for RFOC of single-phase induction motor based on rotational transformations*. In 2013 IEEE Student Conference on Research and Development (SCORED). 2013: 215-220.
- [8] GS Ilango, N Rajasekar. An improved energy saving v/f control technique for solar powered single-phase induction motor. *Energy conversion and Management*. 2009; 50(12): 2913-2918.
- [9] MB Correa, CB Jacobina, AMN Lima, ERC Da Silva. Rotor-Flux-Oriented Control of a Single-Phase Induction Motor Drive. *IEEE Transactions on Industrial Electronics*. 2000; 47(4): 832-841.
- [10] MB Correa, CB Jacobina, ERC Da Silva, AMN Lima. Vector control strategies for single-phase induction motor drive systems. *IEEE Transactions on Industrial Electronics*. 2004; 51(5): 1073-1080.
- [11] S Vaez-Zadeh, SR Harooni. *Decoupling Vector Control of Single-Phase Induction Motor Drives*. Proceedings of 36th IEEE Conference on Power Electronics Specialists PESC. 2005: 733-738.
- [12] S Reicy, S Vaez-Zadeh. *Vector Control of Single-Phase Induction Machine with Maximum Torque Operation*. Proceedings of the IEEE International Symposium on Industrial Electronics. 2005: 923-928.
- [13] M Jannati, NRN Idris, MJA Aziz. Speed Sensorless Fault-Tolerant Drive System of 3-Phase Induction Motor Using Switching Extended Kalman Filter. *TELKOMNIKA Indonesian Journal of Electrical Engineering*. 2014; 12(11): 7640-7649.
- [14] M Jannati, SH Asgari, NRN Idris, MJA Aziz. Speed Sensorless Direct Rotor Field-Oriented Control of Single-Phase Induction Motor Using Extended Kalman Filter. *International Journal of Power Electronics and Drive Systems (IJPEDS)*. 2014; 4(4): 430-438.
- [15] M Jannati, SA Anbaran, MI Alsofyani, NRN Idris, MJA Aziz. *Modeling and RFOC of faulty three-phase IM using Extended Kalman Filter for rotor speed estimation*. In 8th International Power Engineering and Optimization Conference (PEOCO). 2014: 270-275.
- [16] M Jannati, SH Asgari, A Monadi, NRN Idris, MJA Aziz, D Dehghani, AAM Faudzi. *Modeling and speed estimation of a faulty 3-phase induction motor by using extended Kalman filter*. In 2014 IEEE Symposium on Computer Applications and Industrial Electronics (ISCAIE). 2014: 76-81.
- [17] HB Azza, N Zaidi, M Jemli, M Boussak. Development and Experimental Evaluation of a Sensorless Speed Control of SPIM Using Adaptive Sliding Mode-MRAS Strategy. *IEEE Journal of Emerging and Selected Topics in Power Electronics*. 2014; 2(2): 319-328.
- [18] HB Azza, M Jemli, M Boussak, M Gossa. High performance sensorless speed vector control of SPIM Drives with on-line stator resistance estimation. *Simulation Modelling Practice and Theory*. 2011; 19(1): 271-282.
- [19] M Jannati, A Monadi, NRN Idris, MJA Aziz. Speed Sensorless Vector Control of Unbalanced Three-Phase Induction Motor with Adaptive Sliding Mode Control. *International Journal of Power Electronics and Drive Systems (IJPEDS)*. 2014; 4(3): 406-418.
- [20] M Jemli, H Ben Azza, M Boussak. Sensorless Indirect Stator Field Orientation Speed Control for Single-Phase Induction Motor Drive. *IEEE Transactions on Power Electronics*. 2009; 24(6): 1618-1627.
- [21] M Jannati, A Monadi, GW Yen, SH Asgari, NRN Idris, MJA Aziz. *A simple vector control technique for 3-phase induction motor under open-phase fault based on GA for tuning of speed PI controller*. In 2014 IEEE Conference on Energy Conversion (CENCON). 2014: 213-218.
- [22] S Kascak, M Prazenica, B Dobrucky. *Position Control of Two-Phase Induction Motor using dSpace environment*. Proceedings of 38th IEEE Conference on Industrial Electronics Society IECON2012. 2012: 1958-1963.

- [23] J Pedra, I Candela, L Sainz. Modelling of squirrel-cage induction motors for electromagnetic transient programs. *IET Electr. Power Appl.* 2009; 3(2): 111-122.
- [24] Z Marinković, D Marinković, G Petrović, P Milić. Modelling and simulation of dynamic behaviour of electric motor driven mechanisms. *Tehnički vjesnik.* 2012; 19(4): 717-725.
- [25] A Gaeta, G Scelba, A Consoli. Modeling and control of three-phase PMSMs under open-phase fault. *IEEE Transactions on Industry Applications.* 2013; 49(1): 74-83.

# A Novel Technique for Fault-Tolerant Control of SinglePhase Induction Motor

---

ORIGINALITY REPORT

---

24%

SIMILARITY INDEX

---

## PRIMARY SOURCES

---

- 1

Mahmoud A. Mossa, Ahmed A. Zaki Diab. "Effective Model Predictive Control Approach for a Faulty Induction Motor Drive", International Review of Electrical Engineering (IREE), 2019

66 words — 2%

Crossref
- 2

Maryam Naghavi, Mahmood Ghanbari, Reza Ebrahimi, Mohammad Jannati. "Improving reliability in electric drive systems during IGBT short - circuit fault", IET Power Electronics, 2020

66 words — 2%

Crossref
- 3

[junaidi.fke.utm.my](http://junaidi.fke.utm.my)

53 words — 2%

Internet
- 4

Rahemeh Tabasian, Mahmood Ghanbari, Abdolreza Esmaeli, Mohammad Jannati. " of induction machine drives against fault ", International Transactions on Electrical Energy Systems, 2021

47 words — 1%

Crossref
- 5

Gaeta, A., G. Scelba, and A. Consoli. "Modeling and Control of Three-phase PMSMs under Open-Phase Fault", IEEE Transactions on Industry Applications, 2012.

33 words — 1%

Crossref

- 
- 6 K.J. Lee, H.G. Kim, D.K. Lee, T.W. Chun, E.C. Nho. "High performance drive of single-phase induction motor", ISIE 2001. 2001 IEEE International Symposium on Industrial Electronics Proceedings (Cat. No.01TH8570), 2001  
Crossref 33 words — 1%
- 
- 7 [digilib.mercubuana.ac.id](http://digilib.mercubuana.ac.id)  
Internet 33 words — 1%
- 
- 8 [eprints.unsri.ac.id](http://eprints.unsri.ac.id)  
Internet 30 words — 1%
- 
- 9 [www.researchgate.net](http://www.researchgate.net)  
Internet 29 words — 1%
- 
- 10 [ajbasweb.com](http://ajbasweb.com)  
Internet 27 words — 1%
- 
- 11 F.Y. Zainal, N. Abd Rahim, A. Rivai, O. Erixno. "Fault detection and isolation for water-pump system with signal-based approach using SCADA", 4th IET Clean Energy and Technology Conference (CEAT 2016), 2016  
Crossref 25 words — 1%
- 
- 12 Mohamed Jemli, Hechmi Ben Azza, Moncef Gossa. "Real-time implementation of IRFOC for Single-Phase Induction Motor drive using dSpace DS 1104 control board", Simulation Modelling Practice and Theory, 2009  
Crossref 22 words — 1%
- 
- 13 Peuteman, J., and G. Van Heerswynghe. "Active power reversal in the main winding of a single phase induction motor", 5th IET International Conference on Power Electronics Machines and Drives (PEMD 2010), 2010.  
Crossref 19 words — 1%

- 
- 14 G. Saravana Ilango, K. Samidurai, M. Roykumar, K. Thanushkodi. "Energy efficient power electronic controller for a capacitor-run single-phase induction motor", Energy Conversion and Management, 2009  
Crossref 18 words — 1%
- 
- 15 [www.iaet.net](http://www.iaet.net)  
Internet 16 words — < 1%
- 
- 16 [hal.archives-ouvertes.fr](http://hal.archives-ouvertes.fr)  
Internet 14 words — < 1%
- 
- 17 S. Vaez-Zadeh, S.H. Reicy. "Sensorless vector control of single-phase induction motor drives", 2005 International Conference on Electrical Machines and Systems, 2005  
Crossref 13 words — < 1%
- 
- 18 [www.mdpi.com](http://www.mdpi.com)  
Internet 12 words — < 1%
- 
- 19 [hdl.handle.net](http://hdl.handle.net)  
Internet 11 words — < 1%
- 
- 20 [hrcak.srce.hr](http://hrcak.srce.hr)  
Internet 11 words — < 1%
- 
- 21 [www.semanticscholar.org](http://www.semanticscholar.org)  
Internet 11 words — < 1%
- 
- 22 Mehdi Taherzadeh, Sébastien Carriere, Franck Betin, Mahmood Joorabian, Reza Kianinezhad, Gérard-André Capolino. "A Novel Strategy for Sensorless Control Modification of a Six-phase Induction Generator in Faulted Mode", Electric Power Components and Systems, 2016  
Crossref 10 words — < 1%



- 
- 23 [www.webtic.com](http://www.webtic.com) Internet 10 words — < 1%
- 
- 24 Azzolin, R. Z., T. A. Bernardes, R. P. Vieira, C. C. Gastaldini, and H. A. Grundling. "Decoupling and sensorless vector control scheme for single-phase induction motor drives", IECON 2012 - 38th Annual Conference on IEEE Industrial Electronics Society, 2012. Crossref 9 words — < 1%
- 
- 25 Kascak, S., M. Prazenica, and B. Dobrucky. "Position control of Two-Phase Induction motor using dSpace environment", IECON 2012 - 38th Annual Conference on IEEE Industrial Electronics Society, 2012. Crossref 9 words — < 1%
- 
- 26 Ngoc Thuy Pham, Diep Phu Nguyen, Khuong Huu Nguyen, Nho Van Nguyen. "New Version of Adaptive Speed Observer based on Neural Network for SPIM", International Journal of Power Electronics and Drive Systems (IJPEDS), 2018 Crossref 9 words — < 1%
- 
- 27 Yassine Kali, Magno Ayala, Jorge Rodas, Maarouf Saad, Jesus Doval-Gandoy, Raul Gregor, Khalid Benjelloun. "Current Control of a Six-Phase Induction Machine Drive Based on Discrete-Time Sliding Mode with Time Delay Estimation", Energies, 2019 Crossref 9 words — < 1%
- 
- 28 [d-nb.info](http://d-nb.info) Internet 9 words — < 1%
- 
- 29 [quijote.biblio.iteso.mx](http://quijote.biblio.iteso.mx) Internet 9 words — < 1%
- 
- 30 [www.eng.auburn.edu](http://www.eng.auburn.edu)

9 words — &lt; 1%

31 [www.ijireeice.com](http://www.ijireeice.com)

Internet

9 words — &lt; 1%

32 Baluguri Ravi Teja, Suresh Mikkili. "Deployment of Fuzzy based MRAS and IRFOC strategy with fast tracking for the sensorless speed control of SPIM", 2016 IEEE 6th International Conference on Power Systems (ICPS), 2016

Crossref

8 words — &lt; 1%

33 J.S. Artal, J. Caraballo. "Staircase modulation applied in a speed controller for small's single/two - phase induction motors", International Symposium on Power Electronics Power Electronics, Electrical Drives, Automation and Motion, 2012

Crossref

8 words — &lt; 1%

34 Muhammad Noman Almani, Ghulam Amjad Hussain, Ashraf A. Zaher. "An Improved Technique for Energy-Efficient Starting and Operating Control of Single Phase Induction Motors", IEEE Access, 2021

Crossref

8 words — &lt; 1%

35 S. Vaez-Zadeh. "Vector Control of Single-Phase Induction Machine with Maximum Torque Operation", Proceedings of the IEEE International Symposium on Industrial Electronics 2005 ISIE 2005, 2005

Crossref

8 words — &lt; 1%

36 [archive.org](http://archive.org)

Internet

8 words — &lt; 1%

37 [media.proquest.com](http://media.proquest.com)

Internet

8 words — &lt; 1%

39

Jemli, Mohamed, Hechmi Ben Azza, Mohamed Boussak, and Moncef Gossa. "Sensorless Indirect Stator Field Orientation Speed Control for Single-Phase Induction Motor Drive", IEEE Transactions on Power Electronics, 2009.

Crossref

7 words — &lt; 1%

40

Veera Thanyaphirak, Vijit Kinnarees, Anantawat Kunakorn. "PWM AC chopper control schemes for energy saving of single-phase induction motors", 2012 10th International Power & Energy Conference (IPEC), 2012

Crossref

7 words — &lt; 1%

41

Yi - Ting Zheng, Lin Li, Yiqin Sun. "Wideband and spurious - suppressed differential bandpass filter based on strip - loaded slot - line structure", International Journal of RF and Microwave Computer-Aided Engineering, 2019

Crossref

7 words — &lt; 1%

42

A. B. Nanda. "High performance vector control of single phase induction motor drives based on rotor MEMF", 2011 International Conference on Energy Automation and Signal, 12/2011

Crossref

6 words — &lt; 1%

43

Hadi Abbasi, Mahmood Ghanbari, Reza Ebrahimi, Mohammad Jannati. "IRFOC of Induction Motor Drives Under Open-Phase Fault Using Balanced and Unbalanced Transformation Matrices", IEEE Transactions on Industrial Electronics, 2021

Crossref

6 words — &lt; 1%

---

44 Hechmi Ben Azza, Noureddaher Zaidi, Mohamed Jemli, Mohamed Boussak. "Development and Experimental Evaluation of a Sensorless Speed Control of SPIM Using Adaptive Sliding Mode-MRAS Strategy", IEEE Journal of Emerging and Selected Topics in Power Electronics, 2014 6 words — < 1%  
Crossref

---

45 S. Vaez-Zadeh, Sh.R. Harooni. "Decoupling Vector Control of Single Phase Induction Motor Drives", IEEE 36th Conference on Power Electronics Specialists, 2005., 2005 6 words — < 1%  
Crossref

---

EXCLUDE QUOTES OFF

EXCLUDE MATCHES OFF

EXCLUDE BIBLIOGRAPHY ON