

Vector Control of Three-Phase Induction Motor with Two Stator Phases Open-Circuit

By Tole Sutikno

Vector Control of Three-Phase Induction Motor with Two Stator Phases Open-Circuit

Seyed Hesam Asgari*, Mohamm⁴³annati*, Tole Sutikno**, Nik Rumzi Nik Idris*

* UTM-PROTON Future Drive Laboratory, Faculty of Electrical Engineering, Universiti Teknologi Malaysia
Johor Bahru, Malaysia

** Department of Electrical Engineering, Faculty of Industrial Technology, Universitas Ahmad Dahlan
Yogyakarta, Indonesia

Article Info

Article history:

Received Feb 16, 2015
Revised Apr 27, 2015
Accepted May 10, 2015

Keyword:

Fault condition
Field-oriented control
Three-phase induction motor
Torque and speed oscillations
Two stator phases open-circuit
Vector control

ABSTRACT

Variable frequency drives are used to provide reliable dynamic systems and significant reduction in usage of energy and costs of the induction motors. Modeling and control of faulty or an unbalanced three-phase induction motor is obviously different from healthy three-phase induction motor. Using conventional vector control techniques such as Field-Oriented Control (FOC) for faulty three-phase induction motor, results in a significant torque and speed oscillation. This research presented a novel method for vector control of three-phase induction motor under fault condition (two-phase open circuit fault). The proposed method for vector control of faulty machine is based on rotor FOC method. A comparison between conventional and modified controller shows that the modified controller has been significantly reduced the torque and speed oscillations.

Copyright © 2015 Institute of Advanced Engineering and Science.
All rights reserved.

Corresponding Author:

Mohammad Jannati,
Faculty of Electrical Engineering,
Universiti Teknologi Malaysia,
UTM Skudai, 81310 Johor, Malaysia.
Email: jannatim94@yahoo.com

1. INTRODUCTION

Three-phase induction motors are utilized in wide range of applications as a means of transforming electric power to mechanical power. The alternating current is provided to the stator winding directly whereas supply the voltage to the rotor winding is by induction; consequently it is named induction machine. The induction machine has the ability to function as a motor and as a generator. Nevertheless, it is rarely employed as a generator providing electrical power to a load. The overall performance features as a generator are not good enough for most usage. The induction machine is broadly applied as a motor in many applications. The induction motor is employed in different sizes. Small single-phase induction motors are applied in many domestic appliances, such as lawn mowers, juice mixers, blenders, washing machines, stereo turntables, and refrigerators. Large three-phase induction motors (in 10's or 100's of horsepower) are applied in fans, compressors, pumps, textile mills, paper mills and so forth. The linear type of the induction machine has been created mainly in order to use in transportation systems [1].

Over the past decades, many control techniques have been proposed for induction motors drive system. One of the most well-known control method for controlling the speed and torque of the induction motor is Field-Oriented Control (FOC) [2]. Modeling and control of faulty induction motor, is obviously different from the conventional balanced three-phase induction motor. As such, new modeling and control approaches have to be applied at the instance the faulty is detected. By applying the conventional balanced three-phase induction motor control strategy, such FOC to faulty induction motor, significant oscillations in

the torque output will be presence; this is because of the unequal inductances in the d and q axis of the unbalanced induction [3], [4]

Important works has been developed concerning the implementation of vector control methods for electrical machines under open-phase fault [5]-[18]. Most of the pervious works have focused on developing vector control methods of faulty multi-phase induction motors (five and six phases) [5]-[9], faulty Permanent Magnet Synchronous Motors (PMSMs) [10]-[12], and three-phase induction motor under 2-p [17] condition (one-phase open circuit fault) [3], [4], [13]-[18] but none of them presented in the case of vector control method for three-phase induction motor drive with two stator phases open-circuit.

This research presented a new method for vector control of three-phase induction motor under fault condition. Main objectives of this research are as follows: (1): To develop a model of a faulty three-phase induction motor when two-phases of the stator are open circuit, which can be controlled using rotor FOC technique, (2): To modify a conventional rotor FOC of induction motor, so that it can be applied for unbalanced three-phase induction motor (while two-phase of stator are open circuit).

2. THREE-PHASE INDUCTION MOTOR MODEL WITH TWO STATOR PHASES OPEN-CIRCUIT

In this section the d-q model of three-phase induction motor when two phases of stator are open-circuit is presented. Figure 1 shows the d-q axes and stator a-axis.




Figure 1. d-q axes and stator a-axis

In Figure 1, f_{as} can be current, voltage or flux and θ_e is the angle between q-axis and a-axis variable of stator. Based on Figure 1, stator a-axis variable is formulated in terms of d and q axes as follows:

$$f_d = f_{as} \sin \theta_e, f_q = f_{as} \cos \theta_e \quad (1)$$

Considering that the d and q axes are orthogonal, consequently their dot product has to be equal to zero. As a result, θ_e can be equal to zero or $(\pi/2)$. In this study it is assumed, θ_e is equal to zero then d and q axes can be written as equation (2):

$$f_d = 0, f_q = f_{as} \quad (2)$$

Therefore, the stator transformation matrix in the fault situation (two stator phases open-circuit) can be obtained as equation (3):

$$\begin{bmatrix} f_q \end{bmatrix} = [T_s^{fault}] \begin{bmatrix} f_{as} \end{bmatrix} \rightarrow [T_s^{fault}] = [1] \quad (3)$$

The rotor transformation matrix is the same as rotor transformation matrix in the balanced condition. In equation (5), γ is the angle between rotor a-axis variable and d-axis.

$$[T_r] = \sqrt{\frac{2}{3}} \begin{bmatrix} \cos(\gamma) & \cos(\gamma + 120) & \cos(\gamma - 120) \\ \sin(\gamma) & \sin(\gamma + 120) & \sin(\gamma - 120) \end{bmatrix} \quad (4)$$

By applying stator and rotor transformation to voltage equation of the motor, the voltage equation of faulty motor in stationary reference frame can be shown as follows [14]:

$$\begin{bmatrix} V_{ds}^s \\ V_{qs}^s \\ 0 \\ 0 \end{bmatrix} = \begin{bmatrix} r_{sd} + L_{sd} \frac{d}{dt} & 0 & M_{srd} \frac{d}{dt} & 0 \\ 0 & r_{sq} + L_{sq} \frac{d}{dt} & 0 & M_{srq} \frac{d}{dt} \\ M_{srd} \frac{d}{dt} & \omega_r M_{srq} & r_r + L_r \frac{d}{dt} & \omega_r L_r \\ -\omega_r M_{srd} & M_{srq} \frac{d}{dt} & -\omega_r L_r & r_r + L_r \frac{d}{dt} \end{bmatrix} \begin{bmatrix} i_{ds}^s \\ i_{qs}^s \\ i_{dr}^s \\ i_{qr}^s \end{bmatrix} \quad (5)$$

$$\begin{bmatrix} \lambda_{ds}^s \\ \lambda_{qs}^s \\ \lambda_{dr}^s \\ \lambda_{qr}^s \end{bmatrix} = \begin{bmatrix} L_{sd} & 0 & M_{srd} & 0 \\ 0 & L_{sq} & 0 & M_{srq} \\ M_{srd} & 0 & L_r & 0 \\ 0 & M_{srq} & 0 & L_r \end{bmatrix} \begin{bmatrix} i_{ds}^s \\ i_{qs}^s \\ i_{dr}^s \\ i_{qr}^s \end{bmatrix} \quad (6)$$

where, the parameter of the model are defined as the values of (7):

$$L_{sd} = 0, L_{sq} = L_{ls} + L_{ms}, L_r = L_{ls} + \frac{3}{2} L_{mr}, M_{srd} = 0, M_{srq} = \sqrt{\frac{3}{2}} L_{ms}, r_{sd} = 0, r_{sq} = r_s \quad (7)$$

The electromagnetic torque of faulty three-phase induction motor can be shown as follows:

$$T_e = \frac{pole}{2} (M_{srq} i_{qs}^s i_{dr}^s - M_{srd} i_{ds}^s i_{qr}^s) \quad (8)$$

In (5)-(8), V_{ds}^s and V_{qs}^s are stator d and q axes voltages i_{ds}^s , i_{qs}^s , i_{dr}^s and i_{qr}^s represent the stator and rotor d and q axes currents λ_{ds}^s , λ_{qs}^s , λ_{dr}^s and λ_{qr}^s denote the stator and rotor d and q axes L_{ms} , L_{mr} , L_{ls} and L_{lr} represent the stator and rotor, mutual and leakage inductances. r_{sd} , r_{sq} and r_r are the stator and rotor d and q axes resistances. As presented, the model of three-phase induction motor with two phases open-circuit has the same structure of equations compared with balanced three-phase induction motor except the value of the parameters of the model.

3. ROTOR FOC OF THREE-PHASE INDUCTION MOTOR MODEL WITH TWO STATOR PHASES OPEN-CIRCUIT

To apply the rotor FOC strategy, the equations of the induction motor should be transformed to the rotor reference frame. For this purpose, the rotational transformation matrix as shown in (9) should be applied to the variables of the motor [19].

$$[T_s^{mr}] = \begin{bmatrix} \cos \theta_{mr} & \sin \theta_{mr} \\ -\sin \theta_{mr} & \cos \theta_{mr} \end{bmatrix} \quad (9)$$

In this transformation matrix, θ_{mr} is the angle between rotational reference frame and the stationary reference frame. Also the superscript "mr" shows that the variables are expressed in rotational reference frame. In the open phase fault, this transformation matrix cannot be applied to the motor variables, since the motor is unbalanced ($M_{srd} \neq M_{srq}$ and $L_{sd} \neq L_{sq}$). Applying this matrix generates forward and backward components in the motor equations [4]. To solve this problem, in this research, it is proposed unbalanced transformation matrices. The purpose of using these transformation matrices is changing the unbalanced faulty motor equations to the balanced equations. So it is possible to control the faulty induction motor by using some changes in the conventional controller. The idea of using these transformation matrices is adapted from equivalent circuit of single-phase induction motor. This motor is typically unbalanced with two stator windings, main and auxiliary windings which are actually displaced orthogonal. Figure 2(a) shows the equivalent circuit of main and auxiliary windings of stator for single-phase induction motor [2]. The voltage equations of the main and auxiliary windings are defines by (10) and (11).

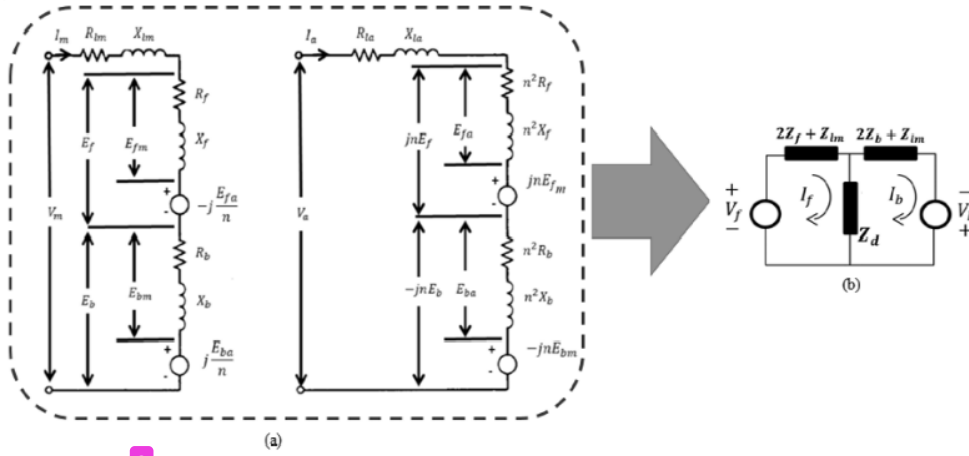


Figure 2. (a) Equivalent circuit of main and auxiliary windings of stator for single-phase induction motor, (b) Simplified equivalent circuit of main and auxiliary windings of stator for single-phase induction motor

$$V_m = Z_{lm}I_m + Z_f I_m - j \frac{E_{fa}}{n} + Z_b I_m + j \frac{E_{ba}}{n} \quad (10)$$

$$V_a = Z_{la}I_a + n^2 Z_f I_a + jnE_{fm} + n^2 Z_b I_a - jnE_{bm}, \quad n = \frac{N_a}{N_m} \quad (11)$$

In (10) and (11), Z_{lm} , Z_{la} , Z_f and Z_b are the leakage impedance of main winding, the leakage impedance of auxiliary winding, the impedance of forward direction and the impedance of backward direction respectively. E_{fa} , E_{ba} , E_{fm} and E_{bm} are the voltage induced by its own fluxes λ_{fa} , λ_{ba} , λ_{fm} and λ_{bm} , which are forward and backward fluxes for main and auxiliary windings respectively. Moreover, the variables of N_a and N_m are the auxiliary and main windings number of the stator. By using some change of variables, the simplified equivalent circuit of single-phase induction can be obtained. The defined variables are V_f , I_f , V_b and I_b which are the forward voltage, forward current, backward voltage and backward current respectively.

$$V_f = \frac{1}{2} \left(V_m - j \frac{V_a}{n} \right), I_f = \frac{1}{2} (I_m - jnI_a), V_b = \frac{1}{2} \left(V_m + j \frac{V_a}{n} \right), I_b = \frac{1}{2} (I_m + jnI_a) \quad (12)$$

To get the simplified equivalent circuit of the single-phase induction motor, it is necessary to define V_m , I_m , V_a and I_a as follows:

$$V_m = V_f + V_b, I_m = I_f + I_b, V_a = (V_b - V_f) \frac{n}{2j}, I_a = (I_b - I_f) \frac{1}{j2n} \quad (13)$$

by substituting (13) in (10), (11), it can be concluded that:

$$V_f = \frac{1}{2} \left(\frac{Z_{la}}{a^2} - Z_{lm} \right) (I_f - I_b) + (2Z_f + Z_{lm}) I_f, \quad V_b = \frac{1}{2} \left(\frac{Z_{la}}{n^2} - Z_{lm} \right) (I_b - I_f) + (2Z_b + Z_{lm}) I_b, \\ V_f + V_b = (2Z_f + Z_{lm}) I_f + (2Z_b + Z_{lm}) I_b, \quad \frac{1}{2} \left(\frac{Z_{la}}{a^2} - Z_{lm} \right) = Z_d \quad (14)$$

Based on the (14), the simplified equivalent circuit of main and auxiliary windings of stator for single-phase induction motor can be shown as Figure 2(b). According to Figure 2(b), if we neglect Z_d , then the equivalent circuit will be divided into two circuits, which both of them indicate a balanced motor with forward direction and backward direction. Therefore, based on V_f and I_f in (12), it is easy to write:

$$\begin{bmatrix} jV_f \\ V_f \end{bmatrix} = \begin{bmatrix} \frac{N_m}{N_a} & j \\ -j\frac{N_a}{N_m} & 1 \end{bmatrix} \begin{bmatrix} V_a \\ V_m \end{bmatrix}, \quad \begin{bmatrix} jI_f \\ I_f \end{bmatrix} = \begin{bmatrix} \frac{N_m}{N_a} & j \\ -j\frac{N_a}{N_m} & 1 \end{bmatrix} \begin{bmatrix} I_a \\ I_m \end{bmatrix} \quad (15)$$

In fact (15), demonstrates a transformation matrix from unbalanced situation (i.e. V_m and V_a) to balances situation (i.e. V_f and jV_f). Based on these equations we are able to use some substitutions as follows:

$$(j \leftrightarrow \sin \theta_{mr}), (1 \leftrightarrow \cos \theta_{mr}), (jV_f \leftrightarrow V_{ds}^{mr}), (V_f \leftrightarrow V_{qs}^{mr}), (V_a \leftrightarrow V_{ds}^s), (V_m \leftrightarrow V_{qs}^s), \\ (jI_f \leftrightarrow i_{ds}^{mr}), (I_f \leftrightarrow i_{qs}^{mr}), (I_a \leftrightarrow i_{ds}^s), (I_m \leftrightarrow i_{qs}^s), \left(\frac{N_m}{N_a} \approx \frac{M_{srq}}{M_{srd}} \approx \sqrt{\frac{L_{sq}}{L_{sd}}}\right) \quad (16)$$

Based on these substitutions, the stator rotational transformation for the variables from stationary to rotor reference frame is as follows:

$$\begin{bmatrix} T_{vs}^{mr} \\ T_{is}^{mr} \end{bmatrix} = \begin{bmatrix} \frac{M_{srq}}{M_{srd}} \cos \theta_{mr} & \sin \theta_{mr} \\ -\frac{M_{srq}}{M_{srd}} \sin \theta_{mr} & \cos \theta_{mr} \end{bmatrix}, \quad \begin{bmatrix} T_{is}^{mr} \\ T_{is}^{mr} \end{bmatrix} = \begin{bmatrix} \frac{M_{srq}}{M_{srd}} \cos \theta_{mr} & \sin \theta_{mr} \\ -\frac{M_{srq}}{M_{srd}} \sin \theta_{mr} & \cos \theta_{mr} \end{bmatrix} \quad (17)$$

16

In order to transform the model of the faulty induction motor to rotor reference frame, first the new transformation matrices for the stator variables (17) are applied. As a result the stator voltage equations in rotor reference frame can be as follows:

$$\begin{bmatrix} V_{ds}^{mr} \\ V_{qs}^{mr} \end{bmatrix} = \underbrace{\begin{bmatrix} (r_{sq} + L_{sq} \frac{d}{dt}) & -\omega_{mr} L_{sq} \\ \omega_{mr} L_{sq} & (r_{sq} + L_{sq} \frac{d}{dt}) \end{bmatrix}}_{\text{Forward}} \begin{bmatrix} i_{ds}^{mr} \\ i_{qs}^{mr} \end{bmatrix} + \underbrace{\begin{bmatrix} M_{srq} \frac{d}{dt} & -\omega_{mr} M_{srq} \\ \omega_{mr} M_{srq} & M_{srq} \frac{d}{dt} \end{bmatrix}}_{\text{Backward}} \begin{bmatrix} i_{dr}^{mr} \\ i_{qr}^{mr} \end{bmatrix} + \underbrace{\begin{bmatrix} -r_{sq} & 0 \\ 0 & -r_{qs} \end{bmatrix}}_{\text{Backward}} \begin{bmatrix} i_{ds}^{-mr} \\ i_{qs}^{-mr} \end{bmatrix} \quad (18)$$

where, i_{ds}^{-mr} and i_{qs}^{-mr} are the backward components of the stator currents that are obtained from:

$$\begin{bmatrix} i_{ds}^{-mr} \\ i_{qs}^{-mr} \end{bmatrix} = \begin{bmatrix} (\cos \theta_{mr})^2 & -\sin \theta_{mr} \cos \theta_{mr} \\ -\sin \theta_{mr} \cos \theta_{mr} & (\sin \theta_{mr})^2 \end{bmatrix} \begin{bmatrix} i_{ds}^{mr} \\ i_{qs}^{mr} \end{bmatrix} \quad (19)$$

To transform the rotor voltage equation to rotor reference frame the rotor transformation matrix (9), must be applied to rotor voltage equation. As a result the rotor voltage equations in rotor reference frame can be as follows:

$$\begin{bmatrix} 0 \\ 0 \end{bmatrix} = \begin{bmatrix} M_{srq} \frac{d}{dt} & -(\omega_{mr} - \omega_r) M_{srq} \\ (\omega_{mr} - \omega_r) M_{srq} & M_{srq} \frac{d}{dt} \end{bmatrix} \begin{bmatrix} i_{ds}^{mr} \\ i_{qs}^{mr} \end{bmatrix} + \begin{bmatrix} r_r + L_r \frac{d}{dt} & -(\omega_{mr} - \omega_r) L_r \\ (\omega_{mr} - \omega_r) L_r & r_r + L_r \frac{d}{dt} \end{bmatrix} \begin{bmatrix} i_{dr}^{mr} \\ i_{qr}^{mr} \end{bmatrix} \quad (20)$$

50

The electromagnetic torque of the faulty motor in rotor reference frame will be as follows:

$$T_e = \frac{Pole}{2} M_{srq} (i_{qs}^{mr} i_{dr}^{mr} - i_{ds}^{mr} i_{qr}^{mr}) \quad (21)$$

13

The rotor flux equation in rotor reference frame can be shown as follows:

$$\begin{bmatrix} \lambda_{dr}^{mr} \\ \lambda_{qr}^{mr} \end{bmatrix} = \begin{bmatrix} M_{srd} & 0 \\ 0 & M_{srq} \end{bmatrix} \begin{bmatrix} i_{ds}^{mr} \\ i_{qs}^{mr} \end{bmatrix} + \begin{bmatrix} L_r & 0 \\ 0 & L_r \end{bmatrix} \begin{bmatrix} i_{dr}^{mr} \\ i_{qr}^{mr} \end{bmatrix} \quad (22)$$

33

In order to apply rotor field-oriented control strategy, the d-axis of the rotational frame must be situated on rotor flux, its means:

$$\begin{bmatrix} \lambda_{dr}^{mr} \\ \lambda_{qr}^{mr} \end{bmatrix} = \begin{bmatrix} |\lambda_r| \\ 0 \end{bmatrix} \quad (23)$$

1

therefore:

$$i_{dr}^{mr} = \frac{|\lambda_r|}{L_r} - \frac{M_{srd}}{L_r} i_{ds}^{mr}, \quad i_{qr}^{mr} = -\frac{M_{srq}}{L_r} i_{qs}^{mr} \quad (24)$$

By substituting (23) and (24) in (18), the stator voltage equations for rotor field-oriented control strategy can be obtained as follows:

$$V_{ds}^{mr} = r_{sq} i_{ds}^{mr} + L_{sq} \frac{d}{dt} i_{ds}^{mr} - \omega_{mr} L_{sq} i_{qs}^{mr} + (L_{sq} - L_{sq}') \frac{d}{dt} \left(\frac{|\lambda_r|}{M_{srq}} \right) - r_{sq} i_{ds}^{-mr} \quad (25)$$

$$V_{qs}^{mr} = r_s i_{qs}^{mr} + L_{sq} \frac{d}{dt} i_{qs}^{mr} + \omega_{mr} L_{sq} i_{ds}^{mr} + \omega_{mr} (L_{sq} - L_{sq}') \left(\frac{|\lambda_r|}{M_{srq}} \right) - r_{sq} i_{qs}^{-mr} \quad (26)$$

where,

$$T_r = \frac{L_r}{r_r}, \quad L_{sq}' = L_{sq} - \frac{M_{srq}^2}{L_r} \quad (27)$$

The rotor voltage equations for rotor field-oriented control strategy can be obtained as follows:

$$T_r \frac{d}{dt} |\lambda_r| + |\lambda_r| - M_{srq} i_{ds}^{mr} = 0, \quad T_r (\omega_{mr} - \omega_r) |\lambda_r| - M_{srq} i_{qs}^{mr} = 0 \quad (28)$$

and the electromagnetic torque equation will be as follows:

$$T_e = \left(\frac{pole}{2} \right) \left(\frac{M_{srq}}{L_r} \right) (|\lambda_r| i_{qs}^{mr}) \quad (29)$$

The stator voltage equations can be divided into decoupling, reference and backward components as:

$$V_{ds}^{mr} = V_{ds}^d + V_{ds}^{ref} + V_{ds}^b, \quad V_{qs}^{mr} = V_{qs}^d + V_{qs}^{ref} + V_{qs}^b \quad (30)$$

$$V_{ds}^d = -\omega_{mr} L_{sq}' i_{qs}^{mr} + (L_{sq} - L_{sq}') \frac{d}{dt} \left(\frac{|\lambda_r|}{M_{srq}} \right), \quad V_{ds}^{ref} = r_{sq} i_{ds}^{mr} + L_{sq}' \frac{d}{dt} i_{ds}^{mr}, \quad V_{ds}^b = -r_{sq} i_{ds}^{-mr} \quad (31)$$

$$V_{qs}^d = \omega_{mr} L_{sq}' i_{ds}^{mr} + \omega_{mr} (L_{sq} - L_{sq}') \left(\frac{|\lambda_r|}{M_{srq}} \right), \quad V_{qs}^{ref} = r_s i_{qs}^{mr} + L_{sq}' \frac{d}{dt} i_{qs}^{mr}, \quad V_{qs}^b = -r_{sq} i_{qs}^{-mr} \quad (32)$$

Defining these variables help us to design the control blocks. For this purpose, V_{ds}^d and V_{qs}^d can be generated by the decoupling circuit and V_{ds}^b and V_{qs}^b can be generated by backward block. Moreover, V_{ds}^{ref} and V_{qs}^{ref} can be generated by two PI control blocks as follows:

$$V_{ds}^{ref} = K_{P1} \Delta i_{ds}^{mr} + K_{P1} \int \Delta i_{ds}^{mr}, \quad V_{qs}^{ref} = K_{P2} \Delta i_{qs}^{mr} + K_{P2} \int \Delta i_{qs}^{mr} \quad (33)$$

10

Consequently, the rotor field-oriented control block diagram of faulty three-phase induction motor is represented in Figure 3. According to this figure the red blocks show the parts in the conventional vector control that must be changed for in order to be used for the unbalanced or faulty three-phase induction motor.

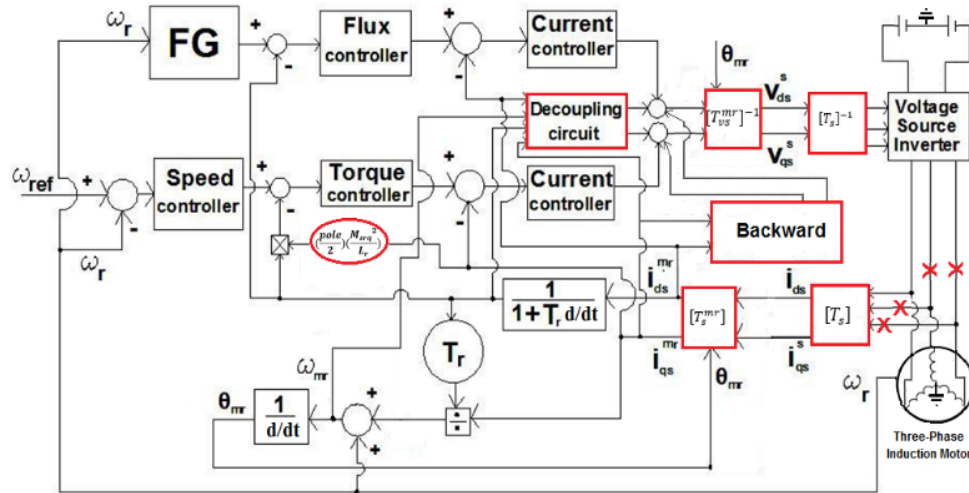


Figure 3. Block diagram of proposed rotor FOC of faulty three-phase induction motor

4. SIMULATION RESULTS


28





In this section, simulation results are discussed in order to verify the effectiveness of the proposed control method for a faulty three-phase induction motor. To show the dynamic behavior of faulty motor, simulation is conducted by using MATLAB (M-File) software. The fourth order Runge-Kutta algorithm is used for solving the advanced and faulty induction motor equations. The parameters and ratings of the simulated motor are as Table 1.

Table 1. The Parameters and Ratings of the Simulated Motor

Voltage=125 v	f=50 Hz	Pole=4	$r_s = 20.6 \Omega$
$r_r = 19.15 \Omega$	$L_{ls} = L_{lr} = 0.0814$ H	$L_{ms} = 0.851$ H	$J = 0.0038$ kg. m ²

Figure 4 shows the comparison between conventional and modified vector controller for faulty three-phase induction motor under no-load condition. In this case the speed reference is set at 500rpm. According to this Figure, the reference speed is set at 500rpm. From $t=0$ s to $t=1$ s, motor is working under healthy condition and from $t=1$ s to $t=3$ s motor is working under faulty condition. This Figure shows using modified controller in comparison with conventional controller the torque and speed oscillation has been reduced.

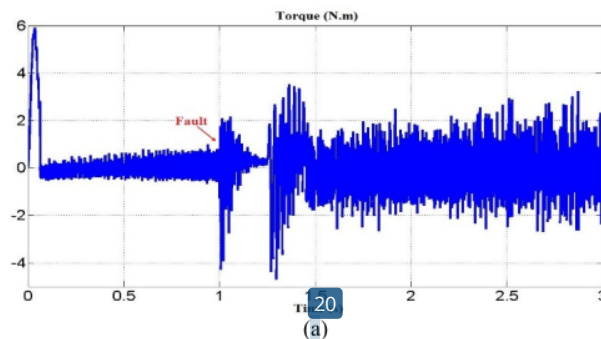

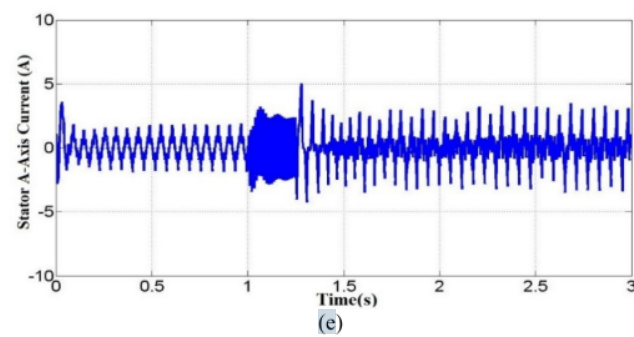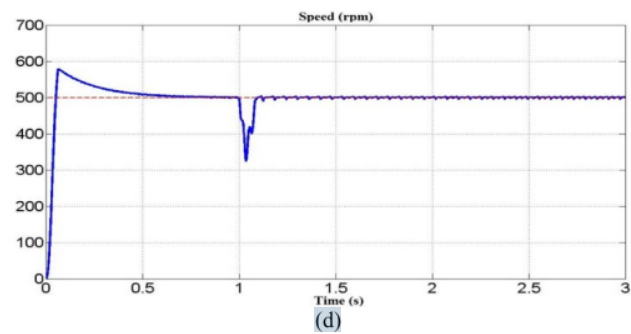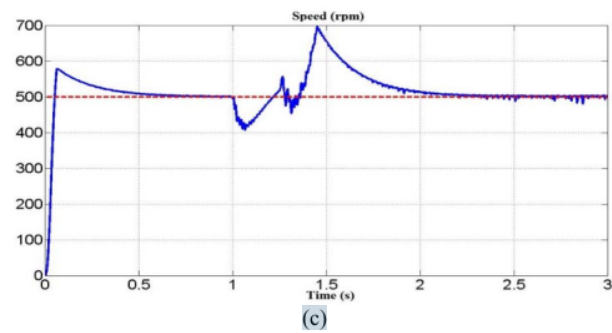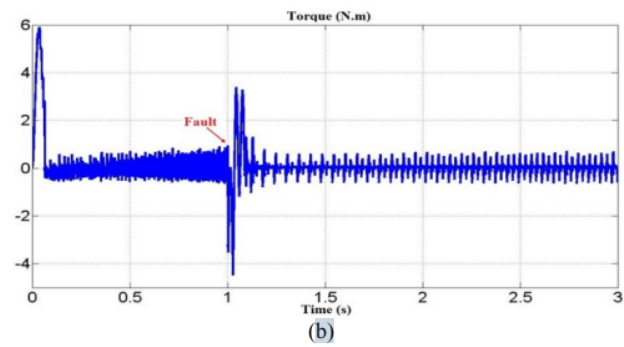

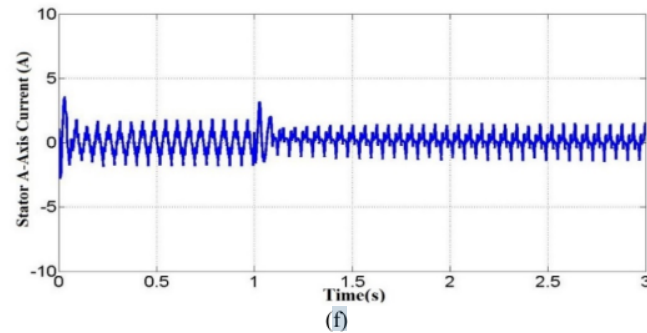
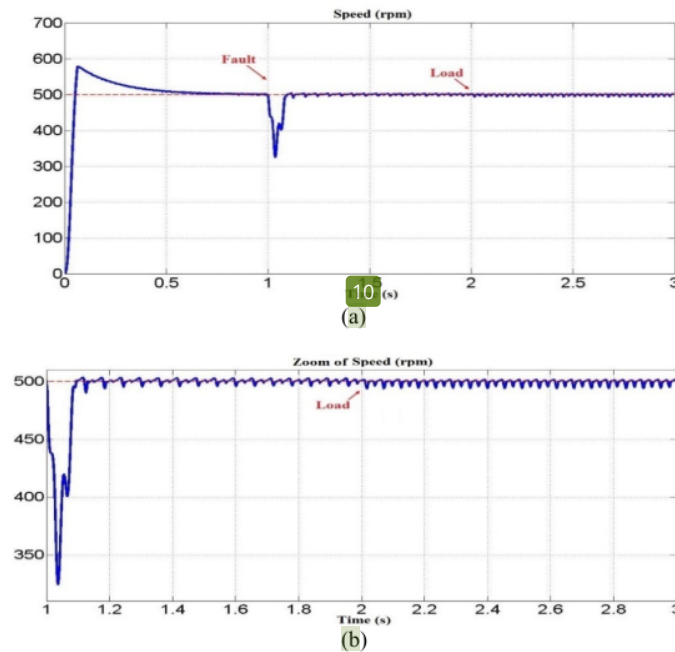


Figure 4. Simulation results of the three-phase induction motor vector control under faulty condition (no load condition); (a): Torque (conventional), (b): Torque (modified), (c): Speed (conventional), (d): Speed (modified), (e): Stator A-Axis Current (conventional), (f): Stator A-Axis Current (modified)

Figure 5 shows vector control of three-phase induction motor based on modified controller and under load condition. According to this Figure from $t=0$ s to $t=1$ s motor is working under healthy condition and from $t=1$ s to $t=3$ s motor is working under faulty condition. The speed reference is set at 500rpm. While the motor is working under faulty condition at $t=2$ s a load equal to 0.2N.m is applied. Figure 5 shows the good performance of the proposed controller for vector control of faulty induction motor even under load condition.



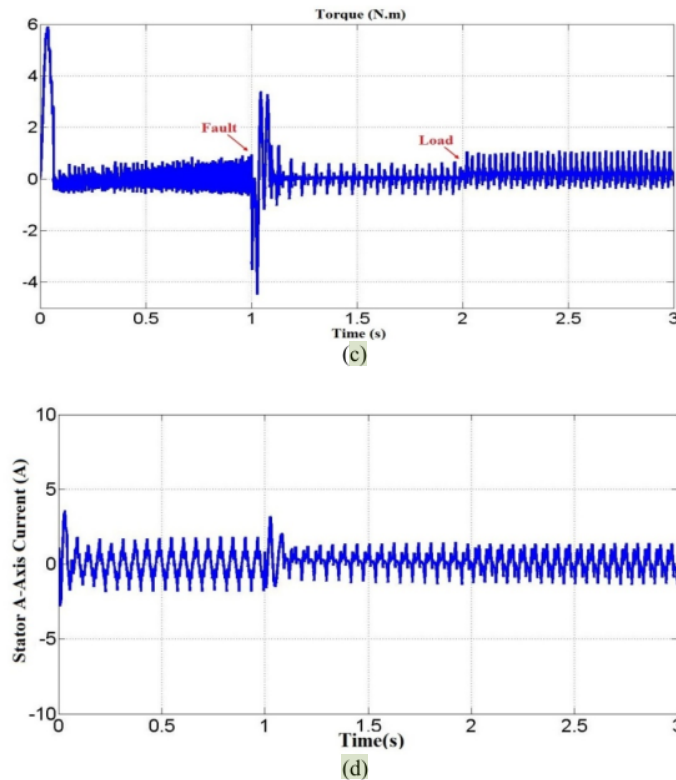


Figure 5. Simulation results of the three-phase induction motor vector control under faulty condition (load condition); (a): Speed, (b): Zoom of Speed, (c): Torque, (d): Stator A-Axis Current

5. CONCLUSION

This paper has presented a vector control method for faulty three-phase induction motor (three-phase induction motor when two phases of the stator are open circuit). It is shown the d-q model of faulty three-phase induction motor has the same structure of equations as the balanced three-phase induction motor. In this study, by using some modifications to the conventional controller, a novel technique for three-phase induction motor while two phases of the stator are open circuit has been presented. A comparison between conventional and modified controller indicated that, the modified controller has significantly reduced the torque and speed oscillations. Beside the implementation of this control strategy for three-phase induction motor, this method can be also used for vector control of single-phase induction motor when works with just main winding and vector control of asymmetrical two-phase induction motor under open-phase fault.

14 REFERENCES

- [1] P.C. SEN, "Principles of Electric Machines and Power Electronics", John Wiley & Sons, 1997.
- [2] K. Satyanarayana, P. Surekha, and P. Vijaya Prasuna, "A New FOC Approach of Induction Motor Drive Using DTC Strategy for the Minimization of CMV", *International Journal of Power Electronics and Drive System (IJPEDS)*, vol. 3, no. 2, pp. 241–250, 2013.
- [3] Z. Yifan and T.A. Lipo, "An approach to modeling and field-oriented control of a three phase induction machine with structural imbalance", *In Proc. APEC, San Jose, TX*, 1996, pp. 380–386.
- [4] M. Jannati, N.R.N. Idris, and M.J.A. Aziz, "A New Method for RFOC of Induction Motor Under Open-Phase Fault", *in Industrial Electronics Society, IECON 2013*, 2013, pp. 2530–2535.
- [5] Zhao and T.A. Lipo, "Modeling and control of a multi-phase induction machine with structural unbalance", *IEEE Transactions on Energy Conversion*, vol. 11, no. 3, pp. 570–577, 1996.
- [6] Huangsheng Xu, H.A. Toliyat, and J. Petersen, "Resilient Current Control of Five-Phase Induction Motor under Asymmetrical Fault Conditions", *Applied Power Electronics Conference and Exposition (APEC)*, 2002, pp. 64–71.

- [7] D. Casadei, M. Mengoni, G. Serra, A. Tani, and L. Zarri, "Minimal fault-tolerant control strategy for multi-phase motor drives under an open circuit phase fault condition", In *18th International Conference on Electrical Machines, IEM 2008*, 2008, pp. 1–6.
- [8] R. Kianinezhad, B. Nahid-Mobarakeh, L. Baghli, F. Betin, and G.A. Capolino, "Modeling and control of six-phase symmetrical induction machine under fault condition due to open phases", *IEEE Transactions on Industrial Electronics*, vol. 55, no. 5, pp. 1966–1977, 2008.
- [9] H. Guzman, M.J. Duran, F. Barrero, B. Bogado, and S. Toral, "Speed control of five-phase induction motors with integrated open-phase fault operation using model-based predictive current control techniques", *IEEE Transactions on Industrial Electronics*, vol. 61, no. 9, pp. 4474–4484, 2014.
- [10] S. Dwari and L. Parsa, "An optimal control technique for multiphase PM machines under open-circuit faults", *IEEE Transactions on Industrial Electronics*, vol. 55, no. 5, pp. 1988–1995, 2008.
- [11] A. Gaeta, G. Scelba, and A. Consoli, "Sensorless vector control of PM synchronous motors during single-phase open-circuit faulted conditions", *IEEE Transactions on Industry Applications*, vol. 48, no. 6, pp. 1968–1979, 2012.
- [12] A. Gaeta, G. Scelba, and A. Consoli, "Modeling and control of three-phase PMSMs under open-phase fault", *IEEE Transactions on Industry Applications*, vol. 49, no. 1, pp. 74–83, 2013.
- [13] A. Sayed-Ahmed, B. Mirafzal, and N.A.O. Demerdash, "Fault-tolerant technique for Δ -connected AC-motor drives", *IEEE Trans. Energy Convers.*, vol. 26, no. 2, pp. 646–653, 2011.
- [14] S.H. Asghar, M. Jannati, and N.R.N. Idris, "Modeling of three-phase induction motor with two stator phases open-circuit", In *2014 IEEE Conference on Energy Conversion (CENCON)*, 2014, pp. 231–236.
- [15] D.K. Kastha and B.K. Bose, "On-line sensorless pulsating torque compensation of a fault mode single-phase variable frequency induction motor drive", *IEEE Transactions on Industry Applications*, vol. 31, no. 4, pp. 802–811, 1995.
- [16] A. Saleh, M. Parniani, and A. Shaltout, "Fault tolerant field oriented control of the induction motor for loss of one inverter phase", In *32nd Annual Conference on IEEE Industrial Electronics, IECON*, 2006, pp. 817–822.
- [17] M. Jannati, A. Monadi, N.R.N. Idris, and M.J.A. Aziz, "Speed sensorless Vector Control of Unbalanced Three-Phase Induction Motor with Adaptive Sliding Mode Control", *International Journal of Power Electronics and Drive Systems (IJPEDS)*, vol. 4, no. 3, pp. 406–418, 2014.
- [18] A. Sayed-Ahmed and N.A. Demerdash, "Fault-Tolerant Operation of Delta-Connected Scalar- and Vector-Controlled AC Motor Drives", *IEEE Transactions on Power Electronics*, vol. 27, no. 6, pp. 3041–3049, 2012.
- [19] P. Vas, "Vector Control of AC Machines", Clarendon press Oxford, 1990.

Vector Control of Three-Phase Induction Motor with Two Stator Phases Open-Circuit

ORIGINALITY REPORT

20%

SIMILARITY INDEX

PRIMARY SOURCES

- 1

Do-Hyun Jang, Duck-Yong Yoon. "Space-vector PWM technique for two-phase inverter-fed two-phase induction motors", IEEE Transactions on Industry Applications, 2003
Crossref

49 words — 1%
- 2

Peuteman, J., and G. Van Heerswynghe. "Active power reversal in the main winding of a single phase induction motor", 5th IET International Conference on Power Electronics Machines and Drives (PEMD 2010), 2010.
Crossref

36 words — 1%
- 3

Karady, . "Induction Machines", Electrical Energy Conversion and Transport An Interactive Computer-Based Approach, 2013.
Crossref

34 words — 1%
- 4

[docshare.tips](#)
Internet

25 words — 1%
- 5

F. Labrique. "Influence of parameter uncertainties on the performance of some induction actuator indirect field oriented control schemes", ISIE 93 - Budapest IEEE International Symposium on Industrial Electronics Conference Proceedings, 1993
Crossref

23 words — 1%

6 Hui Zhong, Xiuhe Wang, Ying Pei. "Modeling and simulation of a novel high efficiency single-phase motor", 2011 6th IEEE Conference on Industrial Electronics and Applications, 2011 21 words — 1%

Crossref

7 "Proceedings of International Conference on Intelligent Manufacturing and Automation", Springer Science and Business Media LLC, 2020 17 words — < 1%

Crossref

8 S. Palanivel, P. Srinivas, V.T. Ranganathan. "A new rotor time constant adaptation method for a VSI fed indirect field oriented induction motor drive", Proceedings of International Conference on Power Electronics, Drives and Energy Systems for Industrial Growth, 1995 17 words — < 1%

Crossref

9 Wenxiang Zhao, Ming Cheng, Wei Hua, Xiaoyong Zhu, Yunqian Zhang. "Fault-tolerant operation of brushless machines having magnets in the stator", 2009 IEEE International Electric Machines and Drives Conference, 2009 17 words — < 1%

Crossref

10 journals.tubitak.gov.tr 17 words — < 1%

Internet

11 J. Qian, M.A. Rahman. "Analysis of field oriented control for permanent magnet hysteresis synchronous motors", IEEE Transactions on Industry Applications, 1993 16 words — < 1%

Crossref

12 Singh, G.. "Multi-phase induction machine drive research-a survey", Electric Power Systems Research, 20020328 16 words — < 1%

Crossref

13 Yasser Abdel-Rady Ibrahim Mohamed. "<![CDATA[Direct Instantaneous Torque Control in Direct Drive Permanent Magnet Synchronous Motors—a New Approach]]>", IEEE Transactions on Energy Conversion, 12/2007
Crossref 16 words — < 1%

14 documents.mx
Internet 16 words — < 1%

15 "Table of contents", 2007 IEEE International Symposium on Industrial Electronics, 2007
Crossref 15 words — < 1%

16 A.M.S. Mendes, A.J. Marques Cardoso. "Continuous operation performance of faulty induction motor drives", IEEE International Electric Machines and Drives Conference, 2003. IEMDC'03., 2003
Crossref 15 words — < 1%

17 Peng Zhu, Mingzhong Qiao, Yongqing Wei, Yihui Xia. "Research on five-phase induction motor system control with third harmonic current injection", The Journal of Engineering, 2017
Crossref 15 words — < 1%

18 R. Kianinezhad, B. Nahid-Mobarakeh, L. Baghli, F. Betin, G. A. Capolino. "Torque Ripples Suppression for Six-Phase Induction Motors Under Open Phase Faults", IECON 2006 - 32nd Annual Conference on IEEE Industrial Electronics, 2006
Crossref 13 words — < 1%

19 Panigrahi, B.P.. "A simple hardware realization of switching table based direct torque control of induction motor", Electric Power Systems Research, 200702
Crossref 12 words — < 1%

-
- 20 [biorxiv.org](https://www.biorxiv.org) 12 words — < 1%
Internet
-
- 21 so01.tci-thaijo.org 12 words — < 1%
Internet
-
- 22 xplore.staging.ieee.org 12 words — < 1%
Internet
-
- 23 Ahmed Mortuza Saleque, Siam Hasan Khan, Alif Md. Asif Khan, Sabrina Hoque. "Drivetrain design and feasibility analysis of electric three-wheeler powered by renewable energy sources", 2017 4th International Conference on Advances in Electrical Engineering (ICAEE), 2017 11 words — < 1%
Crossref
-
- 24 brage.bibsys.no 11 words — < 1%
Internet
-
- 25 link.springer.com 11 words — < 1%
Internet
-
- 26 Ahmed A. S. Mohamed, Dueal Allen, Tarek Youssef, Osama Mohammed. "Optimal design of high frequency H-bridge inverter for wireless power transfer systems in EV applications", 2016 IEEE 16th International Conference on Environment and Electrical Engineering (EEEIC), 2016 10 words — < 1%
Crossref
-
- 27 E.R. Collins. "Torque and slip behavior of single-phase induction motors driven from variable-frequency supplies", IEEE Transactions on Industry Applications, 1992 10 words — < 1%
Crossref

28 M. Nasir Uddin. "<![CDATA[New Online Loss-Minimization-Based Control of an Induction Motor Drive]]>", IEEE Transactions on Power Electronics, 3/2008
Crossref 10 words — < 1%

29 dimie.grupos.uniovi.es
Internet 10 words — < 1%

30 humanities.utm.my
Internet 10 words — < 1%

31 134.130.107.200
Internet 9 words — < 1%

32 D. Kastha, B.K. Bose. "Fault mode single-phase operation of a variable frequency induction motor drive and improvement of pulsating torque characteristics", IEEE Transactions on Industrial Electronics, 1994
Crossref 9 words — < 1%

33 Ding Wang. "Hybrid Fuzzy Vector Control for Single Phase Induction Motor", 2010 International Conference on Computing, Control and Industrial Engineering, 2010
Crossref 9 words — < 1%

34 Valverde, Gustavo, Elias Kyriakides, Gerald T. Heydt, and Vladimir Terzija. "On-line parameter estimation of saturated synchronous machines", 2011 IEEE Power and Energy Society General Meeting, 2011.
Crossref 9 words — < 1%

35 Varghese, Ishani, and K. V. Aathira. "Current fed switched inverter with improved modulation index", 2015 International Conference on Circuits Power and Computing Technologies [ICCPCT-2015], 2015.
Crossref 9 words — < 1%

36 Zhang, Pinjia, Yi Du, Thomas G. Habetler, and Bin Lu. "Magnetic Effects of DC Signal Injection on Induction Motors for Thermal Evaluation of Stator Windings", IEEE Transactions on Industrial Electronics, 2011.

Crossref

9 words — < 1%

37 sinta3.ristekdikti.go.id

Internet

9 words — < 1%

38 www.ece.utk.edu

Internet

9 words — < 1%

39 "Author Index", IEEE Transactions on Industry Applications, 1/2000

Crossref

8 words — < 1%

40 Barambones, O.. "A robust vector control for induction motor drives with an adaptive sliding-mode control law", Journal of the Franklin Institute, 201103

Crossref

8 words — < 1%

41 Chih - Hong Lin, Kuo - Tsai Chang. "SCRIM drive system using adaptive backstepping control and mended recurrent Romanovski polynomials neural network with reformed particle swarm optimization", International Journal of Adaptive Control and Signal Processing, 2019

Crossref

8 words — < 1%

42 Chingchi Chen, D.M. Divan, D.W. Novotny. "A hybrid inverter/cycloconverter-based variable-speed three-phase induction motor drive for single-phase inputs", IEEE Transactions on Industry Applications, 1995

Crossref

8 words — < 1%

43 Dushan Boroyevich. "Mathematical Model and Control Design for Sensorless Vector Control of

8 words — < 1%

-
- 44 H. B. Polli, F. Rosa, L.H. Stival, A. Nied, J. de Oliveira. "Sensorless indirect vector control of an induction machine with a Scott-T connection in the stator", IECON 2012 - 38th Annual Conference on IEEE Industrial Electronics Society, 2012 8 words — < 1%

Crossref

-
- 45 J.-D. Park, C. Khalizadeh, H. Hofmann. "Design and control of high-speed solid-rotor synchronous reluctance drive with three-phase LC filter", Fourtieth IAS Annual Meeting. Conference Record of the 2005 Industry Applications Conference, 2005., 2005 8 words — < 1%

Crossref

-
- 46 M.A. Jabbar, A.M. Khambadkone, Z. Yanfeng. "Space-Vector Modulation in a Two-Phase Induction Motor Drive for Constant-Power Operation", IEEE Transactions on Industrial Electronics, 2004 8 words — < 1%

Crossref

-
- 47 Trinadha, K., and A. Kumar. "Performance of wind driven induction generator under balanced/unbalanced load and excitation", 2011 IEEE Power and Energy Society General Meeting, 2011. 8 words — < 1%

Crossref

-
- 48 www.publisher.ijier.net 8 words — < 1%

Internet

-
- 49 Jae-Do Park. "<![CDATA[Analysis and Reduction of Time Harmonic Rotor Loss in Solid-Rotor Synchronous Reluctance Drive]]>", IEEE Transactions on Power Electronics, 3/2008 7 words — < 1%

Crossref

50 Kuo-Kai Shyu, Faa-Jeng Lin, Hsin-Jeng Lin, Bor-Sen Juang. "Robust variable structure speed control for induction motor drive", IEEE Transactions on Aerospace and Electronic Systems, 1999 7 words — < 1%

Crossref

51 Jawad Faiz, B. M. Ebrahimi, M. B. B. Sharifian. "Finite Element Transient Analysis of an On-Load Three-Phase Squirrel-Cage Induction Motor with Static Eccentricity", Electromagnetics, 2007 6 words — < 1%

Crossref

52 M.A. Rahman. "Analysis and microprocessor implementation of field oriented control for permanent magnet hysteresis synchronous motor", Conference Record of the 1991 IEEE Industry Applications Society Annual Meeting, 1991 6 words — < 1%

Crossref

53 Tomonobu Senjyu, Naomitsu Urasaki, Tatsuto Kinjo, Hideomi Sekine, Toshihisa Funabashi. "Parameter Measurement for Surface-Mounted Permanent Magnet Synchronous Motor Taking Stator Iron Loss into Account", Electric Power Components and Systems, 2005 6 words — < 1%

Crossref

EXCLUDE QUOTES OFF
EXCLUDE BIBLIOGRAPHY OFF

EXCLUDE MATCHES OFF