

A bidirectional resonant converter based on wide input range and high efficiency for photovoltaic application

By Ibrahim Alhamrouni

A bidirectional resonant converter based on wide input range and high efficiency for photovoltaic application

Article Info

ABSTRACT

Keywords:

Bidirectional Converter
Photovoltaic (PV)
Power Conditioning System
(PCS)
Resonant Converter

This work highlights a modular power conditioning system (PCS) in photovoltaic (PV) applications which consists with a DC-DC converter. The converter is able to regulate and amplify the input DC voltage produced by the PV panel. The implementation of Mosfet as bidirectional switch on the converter yields greater conversion ratio and better voltage regulation than a conventional DC-DC step up converter and PWM resonant converter. It also reduces the switching losses on the output DC voltage of the converter, as the MOSFET switches on primary winding of converter switch on under ZVS conditions. The proposed resonant converter has been designed, with the modification of series resonant converter and PWM boost converter that utilizes the high frequency of AC bidirectional switch to eliminate the weaknesses of used converters. The topology of the proposed converter includes the mode of operations, designing procedure and components selection of the new converter elements. This topology provides a DC output voltage to the inverter at range of about 120Vac-208 Vac.

18

1. INTRODUCTION

Photovoltaic (PV) energy is one of the renewable energies available in daily life as an option or backup to the other electrical energy supply. Besides, PV energy generation causes no pollution to environment as it is green technology. In addition, the PV energy usage and demand have achieved significant growth in recent years due to constant researches and developments and the civilians' awareness towards clean environment. PV energy is gained by harnessing the solar energy of sunlight's photon using PV modules or solar panel [1, 9]. Each PV module has different direct current (DC) output, thus given the wide input current range to the Power Conditioning System (PCS). In PV system, PCS acts as an inverter that converts the DC output from PV module to alternate current (AC). The PCS is connected to the electric power grid and equipped with Maximum Power Point Tracker (MPPT) [6]. The purpose of this tracker is to improve the efficiency of solar power generation. This tracker has Maximum Power Point Tracking (MPPT) algorithm to maximize the power extraction from PV modules under certain factors and conditions [3, 4]. There are 3 types of PV PCS configuration; modular, string and centralized. Among these configurations, the PV PCS modular type has been considered as the best and commonly used in PV installation because its efficiency in harvesting the energy. What makes PV PCS modular type is the best are the implementation of Module Integrated Converter (MIC) on each PV module for MPPT and it varies in connection of output AC to the grid (called as micro-inverter) or output AC to output DC (called as micro-converter)[5]. In order to obtain the best from solar energy due to many factors affecting the sunlight, the modular PV PCS has to work with high efficiency over wide input range. There are several electronic approaches used to make PV PCS modular type working in high efficiency condition, as example, flyback converter variants, LLC converter, isolated Pulse Width Modulation (PWM) converter and series resonant converter, to meet the requirement of DC-DC micro-converter[6]. These kinds of approaches are the isolated DC-DC converter type, however they have several weaknesses and suffer some inability to meet desired outcome. Besides, the high efficiency has to be achieved by meeting the wide input voltage requirement, zero voltage switching (ZVS) on low circulated currents and zero current switch (ZCS). ZVS and ZCS are the process of switching turn-on and turn-off of converter's switch during zero voltage and zero current input. The importance of the converter achieving ZVS and ZCS are to reduce losses during switching operation and provide soft switching method to reduce the electromagnetic interference [7-9].

Based on the previous studies of DC-DC isolated resonant converter topologies, it can be described that all the converters suffer the drawbacks in order to achieve the desired output. Hence, in order to obtain high efficiency over wide input range, soft switching in Zero Current Switching (ZCS) and Zero Voltage Switching (ZVS) condition, maximum direct power transfer from source to load and good voltage regulation

through fixed PWM control, the development of new isolated resonant converter is considered[8]. In developing the new isolated resonant converter, several processes has been planned properly in order to avoid the drawbacks and maintaining the soft switching and good voltage regulation along the operation. The processes consist of the selection of transformer turns ratio, the designation of resonant tank, transformer design and dead time selection and the most important thing, the selection of semiconductor devices[7]. Besides, the study of previous works on isolated DC-DC resonant converters was really much help in order to develop the new isolated resonant converter. This is because the research can benefits the strengths and relates the certain important points of the previous studies in terms of the circuit designation, modes of operations. Thus, the new developed resonant converter operates much like conventional series resonant converter and PWM boost converter [3]. The newly proposed design has several modifications to the conventional series resonant converter, LLC converter and PWM boost converter, in order to obtain the high efficiency over wide input range under fixed-frequency control [10-12]. One of the significant changes on the proposed circuit is adding bidirectional AC switch on secondary winding of circuit. The bidirectional AC switch is MOSFET (Metal Oxide Semiconductor Field Effect Transistor). The purpose of adding bidirectional AC switch on secondary winding is to utilizing its high frequency for regulation capability of the output, either the output has load or no load by using PWM boost converter design and operation concept [4, 13, 14]. Besides, it helps to maximize the direct power transfer from source to load and providing good wide range of regulation in its operation, thus increasing the converter's efficiency [15-18]. The paper suggests the proposed converter shall provide the high DC-DC voltage conversion ratio, regulates the output transformer voltage and reduce the switching losses when MOSFET switches on primary winding of converter's transformer achieve ZVS. The new proposed resonant converter has been designed, with the modification of series resonant converter and PWM boost converter that utilizes the high frequency of AC bidirectional switch to overcome all weaknesses of previous types of converters. The topology of proposed converter includes the mode of operations, designing procedure and components selection of the new proposed resonant converter.

2. CIRCUIT CONFIGURATION AND OPERATION MODES

The proposed isolated resonant converter has 8 modes of operations. The converter consists of 4 MOSFETs N-Channel on the primary winding of transformer to mitigate the switch count as they form a full bridge switch network, S1, S2, S3 and S4. The additional of two drain-connected of MOSFETs at the secondary winding of transformer as bidirectional switch, S5 allows the converter to operate in conventional series resonant converter mode during OFF condition and PWM boost converter mode during ON condition. The inductor L_r at the secondary winding transformer either can be a resonant inductor or a leakage inductance. The n and L_m from the circuit represent the turns ratio and magnetizing inductance. The resonant inductor, L_r along with output resonant capacitors, C_{r1} and C_{r2} determining the series resonant frequency, f_r for the switch network operation. The L_m value is larger than L_r , while the output capacitor, C_o value is larger than C_{r1} and C_{r2} combined, which also one of the factor that allows the converter to operate in series resonant mode during S5 is OFF. The utilization of PCS in PV application steps up the low voltage into high voltage. Besides, the isolated DC – DC converter type provides the isolation between source and loads which is necessary. Other than that, it also tracks the maximum power point of PV module effectively.

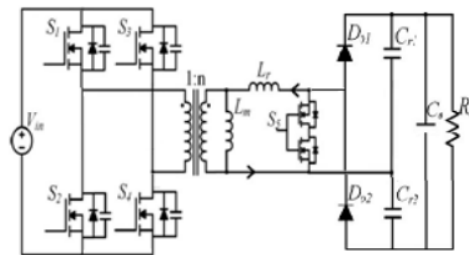



Figure 1. The circuit configuration of the proposed converter

2.1. Mode 1 and mode 5

The circuit operates in PWM boost mode. The positive voltage is generated when switch S1 and S4 are ON during Mode 1. On the other hand, the switch S2 and S3 generates the negative voltage during Mode

25

5 when both are ON. Bidirectional switch, S_5 is ON. The secondary winding of transformer is shorted due to nearly zero current and voltage across leakage inductance, L_r and capacitor C_{r1} . During the Mode 5, the S_2 and S_3 are ON and generate the negative voltage.

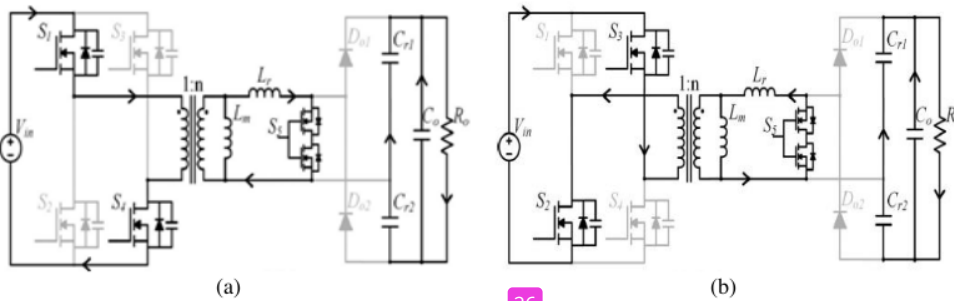

26

Figure 2. Operation modes; (a) mode 1, and (b) mode 5

2.2. Mode 2 and mode 6

The circuit operates as conventional series resonant converter as the bidirectional switch, S_5 is OFF. The resonant inductor, L_r has been charged completely during previous stages (Mode 1 and Mode 5) and discharged after entering these stages through the capacitor duo, C_{r1} and C_{r2} . When the switch S_1 and S_4 are ON during Mode 2, the converter operates in positive duty cycle, while vice versa when S_2 and S_3 are ON during Mode 6.


2.3. Mode 3 and mode 7

23

The converter operates in idle mode. During these stages, the current of inductor L_r declines to zero. Besides, there is no direct power transfer between source and loads as the converter works with fixed frequency. Also, the zero voltage switching (ZVS) is achieved on the primary winding and zero current switching (ZCS) is achieved on the secondary winding. The utilized small current allows the converter to operate close to series resonant frequency.

2.4. Mode 4 and mode 8

These stages are the dead time period of the converter. The magnetizing inductor, L_m has the maximum current value to supplies the converter during Mode 4. The S_2 and S_3 are turn on under ZVS condition. During Mode 8, the S_2 and S_3 are initially off. The current in L_m reaches its minimum value, charges the parasitic capacitance of S_2 and S_3 and discharging those of S_1 and S_4 .

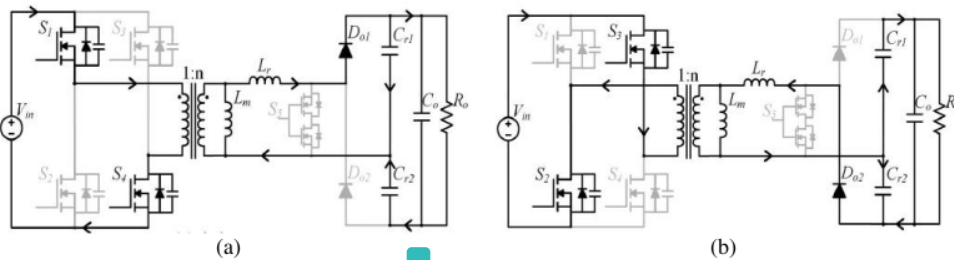

4

Figure 3. Operation modes; (a) mode 2, and (b) mode 6

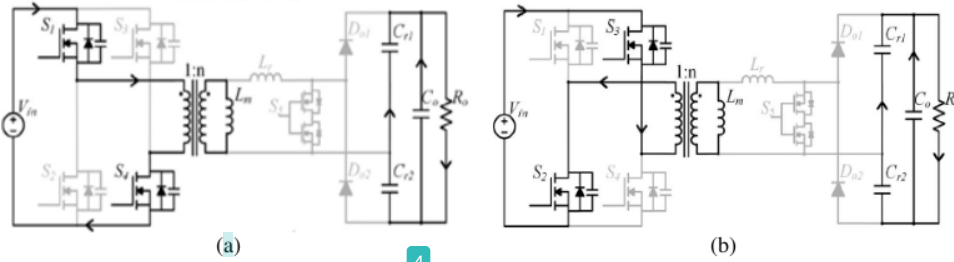


Figure 4. Operation modes; (a) mode 3, and (b) mode 7

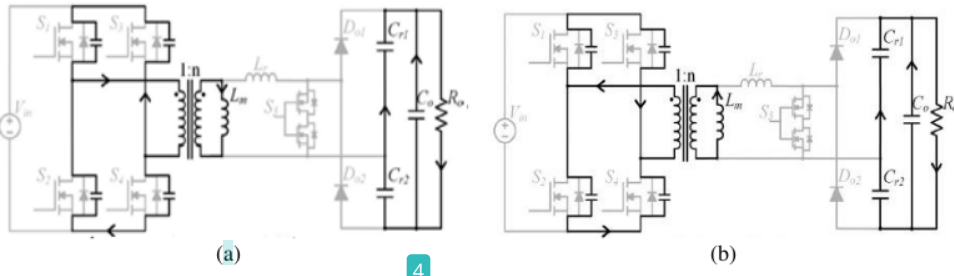


Figure 5. Operation modes; (a) mode 4, and (b) mode 8

3. PROPOSED CONVERTER PARAMETRES DESIGN

The converter also designed to produce output power of 350W. As the inverter is about to produce maximum output AC voltage of 230V, the converter also expected to produce DC voltage of 325V. The switching time, T_s is set at $60\mu s$ and switching frequency is set at 17 kHz which based on LLC resonant converter topology in [13]. In designing the resonant tank, first thing first is choosing the large value of resonant inductor, L_r . The internal reactance of resonant inductor, X_{Lr} and resonant capacitor, X_{Cr} is set at 12.94Ω which also based on LLC resonant converter topology. The large L_r value is necessary for Mode 1 and Mode 2 to last longer than Mode 3. This is because there is no power transfer from load to source in Mode 3 besides by minimizing this operation mode period, it will increase the efficiency of power conversion. The value of L_r can be determined as ;

$$L_r = \frac{X_{Lr}}{2\pi f_r} \quad (1)$$

Meanwhile, the resonant capacitors, C_{r1} and C_{r2} are chosen based on the resonant frequency needed. However, the ripple voltage across those capacitors cannot exceed their own DC voltage. The DC voltage value of the capacitors is half of the output voltage value. The voltage stress across S_5 and the resonant capacitors can be reduced by selecting the lower C_r value. The C_r value can be determined as ;

$$C_r = \frac{P_o T_s}{V_o^2} \quad (2)$$

On the other hand, the resonant frequency, f_r of the converter based on C_r is determined as ;

$$f_r = \frac{1}{2\pi X_{Cr} C_r} \quad (3)$$


It is more important to choose suitable value of magnetizing inductance, L_m to obtain the desired outcome. Still, choosing the larger value of L_m over L_r is necessary to compensate the circulating current on primary winding, thus maximizing the power transfer from source to load besides increasing the efficiency of power conversion. The L_m is 20 times bigger than value of L_r . Last but not least, if the input voltage of the converter is greater than the nominal voltage, the S_5 duty cycle becomes zero and the PWM on the primary side switching will provides the conversion ratio that less than the series resonant converter. If the input voltage

1 the converter is less than the nominal voltage, the utilization of bidirectional switch will provide the conversion ratio that greater than series resonant converter. The number of turns, n can be expressed as ;

$$n = \frac{V_o}{2V_{in}} \quad (4)$$

4. RESULTS AND DISCUSSION

The simulation of the converter is done by MATLAB 2016b version. The converter was designed as suggested in previous csection. By using the mathematical formula shown in previous section, the converter was designed to fulfill the requirement to produce DC output voltage to be inverted by the inverter for AC output voltage range 120Vac - 230Vac. With the implementation of MOSFETs as bidirectional switch on secondary winding, this hybrid converter yields greater conversion ratio than conventional step up DC-DC converter and PWM boost converter with smaller transformer turns ratio and smaller resonant tank parameters. The converter was designed to have the input voltage at range 15V to 50V. However, the converter must have nominal input voltage of 30V and less to be operated under the normal AC switch operation in order to be produ 14 by inverter for AC output voltage of 120Vac – 230Vac. Thus the chosen nominal input 2 voltage is 30V. Figure 6 shows the measured gate voltage and collector voltage of all switches (S1 – S4) at full load condition. The collector voltage VDS dropped to zero, before the switches were turned on. Thus, all the switches were turned on at ZVS.

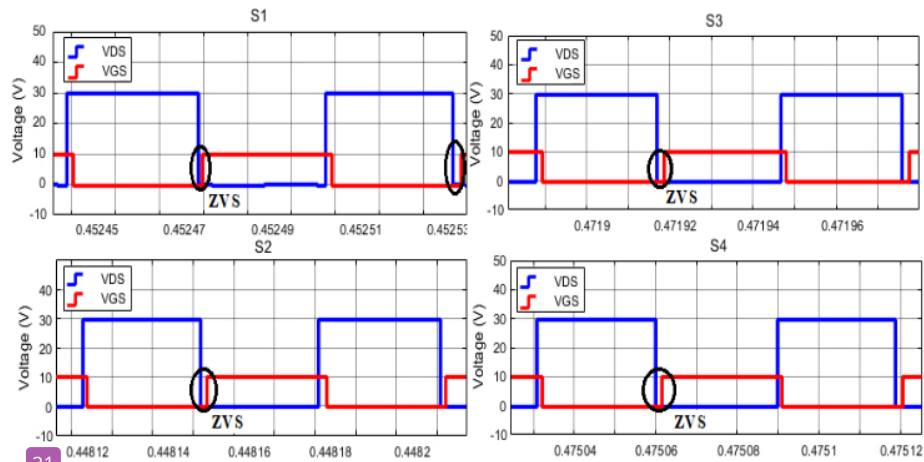

21 Figure 6. Measured waveforms of the gate voltage and drain voltage for each switch separately

As the 4 power MOSFETs sorted as full-bridge switch on primary winding of the converter, the transformer output voltage produce voltage peak to peak AC 340.6V from the 30V input voltage. The transformer output voltage peaked at maximum value 171.8V and minimum value -168.9V as shown in Figure 8.

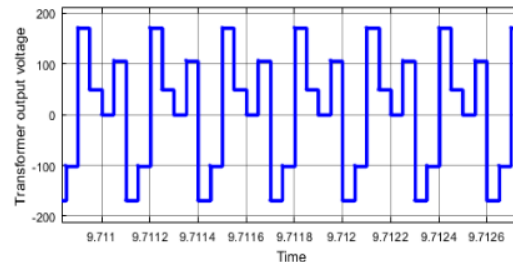
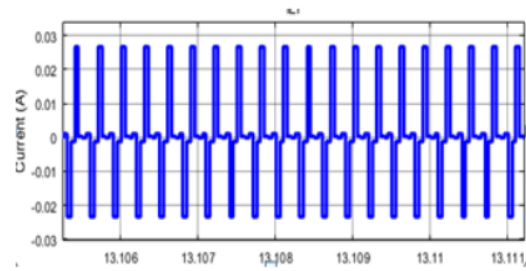
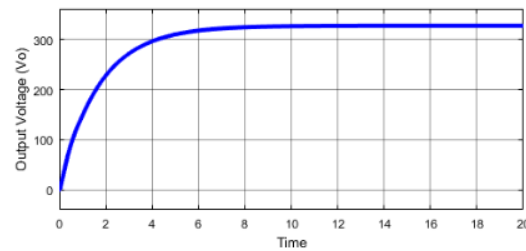


Figure 7. Transformer output voltage Vto

Figure 8. Measured waveform of resonant inductor current i_{Lr} Figure 9. Output voltage V_o

With another installment of MOSFETs on secondary winding of converter as bidirectional switch, the transformer output voltage is regulated and boosted. Thus, produce the DC voltage output of 327.7V as shown in Figure 9. The switching losses were caused by the element called parasitic capacitance. This element is unavoidable when the transistors, diodes and other components that have internal capacitance are draw close to each other ³⁸ the circuit. The proposed converter also has switching losses but it was too small to be compared ²⁰ a step up DC-DC converter. This is because HRC has the attachment of MOSFETs on sec²⁴ary winding to reduce the switching losses. In this contest, the proposed converter is more reliable than step up DC-DC converter.

5. CONCLUSION

The proposed resonant converter, HRC has proven that it can yield higher conversion ratio of the voltage than any other resonant converter, besides regulating the transformer output voltage to produce a sufficient voltage supply for the inverter in the PV system. In addition, the designed DC-DC converter is able to track the MPP of PV panels while operating under the different input voltages. Thus, HRC has fulfilled the criteria and goals. The implementation of two MOSFETs as bidirectional switch on the secondary winding of converter's transformer has also helped reducing switching losses that occur after the full bridge MOSFETs on the primary winding achieves ZVS. Although HRC has 8 different modes of operation, the suitable injection of switching frequency on the MOSFETs made the converter switching the mode after mode very fast and smooth. After all, HRC is the best resonant DC-DC converter to be implemented on modular PCS of PV. In the future, HRC and the inverter can be combined together as one part in modular PCS. It will be a DC-AC converter, thus reducing the components and cost to be used. Further research and development of the recommended project will be considered. With one condition, the converter must produce sufficient output voltage to utility grid with good voltage regulation.

ACKNOWLEDGEMENTS

The authors would like to express their gratitude to Universiti Kuala Lumpur for supporting and funding this research under grant No. str18005.

REFERENCES

- [1] A. Ciocia, V. A. Boicea, G. Chicco, P. Di Leo, A. Mazza, E. Pons, et al., "Voltage Control in Low-Voltage Grids Using Distributed Photovoltaic Converters and Centralized Devices," *IEEE Transactions on Industry Applications*, vol. 55, pp. 225-237, 2019.
- [2] I. Alhamrouni, M. Rahmat, F. Ismail, M. Salem, A. Jusoh, and T. Sutikno, "Design and development of SEPIC DC-DC boost converter for photovoltaic application," *International Journal of Power Electronics and Drive Systems (IJPEDS)*, vol. 10, pp. 406-413, 2019.
- [3] M. A. G. De Brito, L. Galotto, L. P. Sampaio, G. d. A. e Melo, and C. A. Canesin, "Evaluation of the main MPPT techniques for photovoltaic applications," *IEEE transactions on industrial electronics*, vol. 60, pp. 1156-1167, 2013.
- [4] T. Esram and P. L. Chapman, "Comparison of photovoltaic array maximum power point tracking techniques," *IEEE Transactions on energy conversion*, vol. 22, pp. 439-449, 2007.
- [5] T. LaBella, W. Yu, J.-S. J. Lai, M. Senesky, and D. Anderson, "A bidirectional-switch-based wide-input range high-efficiency isolated resonant converter for photovoltaic applications," *IEEE transactions on power electronics*, vol. 29, pp. 3473-3484, 2014.
- [6] M. Salem, A. Jusoh, N. R. N. Idris, T. Sutikno, and Y. M. Y. Buswig, "Phase-shifted Series Resonant Converter with Zero Voltage Switching Turn-on and Variable Frequency Control," *International Journal of Power Electronics and Drive Systems (IJPEDS)*, vol. 8, pp. 1184-1192, 2017.
- [7] R. Beiranvand, B. Rashidian, M. R. Zolghadri, and S. M. H. Alavi, "A design procedure for optimizing the LLC resonant converter as a wide output range voltage source," *IEEE Transactions on Power Electronics*, vol. 27, pp. 3749-3763, 2012.
- [8] R. Beiranvand, B. Rashidian, M. R. Zolghadri, and S. M. H. Alavi, "Using LLC resonant converter for designing wide-range voltage source," *IEEE Transactions on Industrial Electronics*, vol. 58, pp. 1746-1756, 2011.
- [9] M. Salem, A. Jusoh, N. N. Idris, T. Sutikno, and I. Abid, "ZVS Full Bridge Series Resonant Boost Converter with Series-Connected Transformer," *International Journal of Power Electronics and Drive Systems*, vol. 8, pp. 812-825, 2017.
- [10] H. Hu, X. Fang, F. Chen, Z. J. Shen, and I. Batarseh, "A modified high-efficiency LLC converter with two transformers for wide input-voltage range applications," *IEEE Transactions on Power Electronics*, vol. 28, pp. 1946-1960, 2013.
- [11] B.-G. Chung, K.-H. Yoon, S. Phum, E.-S. Kim, and J.-S. Won, "A novel LLC resonant converter for wide input voltage and load range," in 8th International Conference on Power Electronics-ECCE Asia, pp. 2825-2830, 2011.
- [12] H. Choi and P. C. Team, "Design considerations for an LLC resonant converter," in *Fairchild Power Seminar*, pp. 82-3, 2007.
- [13] W. Yu, B. York, and J.-S. Lai, "Inductorless forward-flyback soft-switching converter with dual constant on-time modulation for photovoltaic applications," in 2012 *IEEE Energy Conversion Congress and Exposition (ECCE)*, 2012, pp. 3549-3555, 2012.
- [14] Z. Liang, R. Guo, J. Li, and A. Q. Huang, "A high-efficiency PV module-integrated DC/DC converter for PV energy harvest in FREEDM systems," *IEEE Transactions on Power Electronics*, vol. 26, pp. 897-909, 2011.
- [15] I. Alhamrouni, W. I. Hanis, M. Salem, F. M. Albatsh, and B. Ismail, "Application of DC-DC converter for EV battery charger using PWM technique and hybrid resonant," in 2016 *IEEE International Conference on Power and Energy (PECon)*, pp. 133-138, 2016.
- [16] M. Salem, A. Jusoh, N. R. N. Idris, H. S. Das, and I. Alhamrouni, "Resonant power converters with respect to passive storage (LC) elements and control techniques—An overview," *Renewable and Sustainable Energy Reviews*, vol. 91, pp. 504-520, 2018.
- [17] I. Alhamrouni, M. Salem, A. Jusoh, N. R. N. Idris, B. Ismail, and F. M. Albatsh, "Comparison of two and four switches inverter feeding series resonant converter," in 2017 *IEEE Conference on Energy Conversion (CENCON)*, pp. 334-338, 2017.
- [18] M. Salem, A. Jusoh, N. R. N. Idris, and I. Alhamrouni, "Comparison of LCL resonant converter with fixed frequency, and variable frequency controllers," in 2017 *IEEE Conference on Energy Conversion (CENCON)*, pp. 84-89, 2017.

A bidirectional resonant converter based on wide input range and high efficiency for photovoltaic application

ORIGINALITY REPORT

17%

SIMILARITY INDEX

PRIMARY SOURCES

1 Thomas LaBella, Wensong Yu, Jih-Sheng Lai, Matthew Senesky, David Anderson. "A Bidirectional-Switch-Based Wide-Input Range High-Efficiency Isolated Resonant Converter for Photovoltaic Applications", IEEE Transactions on Power Electronics, 2014 41 words — 1%

[Crossref](#)

2 Mohamed Salem, Awang Jusoh, Nik Rumzi Nik Idris, Tole Sutikno, Yonis.M.Yonis Buswig. "Phase-shifted Series Resonant Converter with Zero Voltage Switching Turn-on and Variable Frequency Control", International Journal of Power Electronics and Drive Systems (IJPEDS), 2017 25 words — 1%

[Crossref](#)

3 Ibrahim Alhamrouni, M. A. Hairullah, N. S. Omar, Mohamed Salem, Awang Jusoh, T. Sutikno. "Modelling and design of PID controller for voltage control of AC hybrid micro-grid", International Journal of Power Electronics and Drive Systems (IJPEDS), 2019 24 words — 1%

[Crossref](#)

4 K. Ohta, G.V. Frisk. "Modal evolution and inversion for seabed geoacoustic properties in weakly range-dependent shallow-water waveguides", IEEE Journal of Oceanic Engineering, 1997 21 words — 1%

[Crossref](#)

5	jpels.org Internet	19 words — 1%
6	tii.ieee-ies.org Internet	18 words — 1%
7	Hillers, A., D. Christen, and J. Biela. "Design of a Highly efficient bidirectional isolated LLC resonant converter", 2012 15th International Power Electronics and Motion Control Conference (EPE/PEMC), 2012. Crossref	17 words — 1%
8	ijpeds.iaescore.com Internet	16 words — 1%
9	Elena Papadopoulou. "Energy Management in Buildings Using Photovoltaics", Springer Science and Business Media LLC, 2012 Crossref	15 words — 1%
10	Yi Tian, Qinglin Zhao, ChenYang Liang. "Research on High Gain Isolated DC Converter with Boost Link", 2021 International Conference on Electronics, Information, and Communication (ICEIC), 2021 Crossref	15 words — 1%
11	Garry Jean-Pierre, Ahmad El Shafei, Necmi Altin, Adel Nasiri. "A Multiport Bidirectional LLC Resonant Converter for Grid-Tied Photovoltaic-Battery Hybrid System", 2019 8th International Conference on Renewable Energy Research and Applications (ICRERA), 2019 Crossref	14 words — 1%
12	Lin, Bor-Ren, and Po-Jen Cheng. "Analysis of an interleaved zero-voltage switching/zero current switching resonant converter with duty cycle control", IET Power Electronics, 2013.	13 words — < 1%

- 13 Thomas LaBella, Jih-Sheng Lai. "A hybrid resonant converter utilizing a bidirectional GaN AC switch for high-efficiency PV applications", 2014 IEEE Applied Power Electronics Conference and Exposition - APEC 2014, 2014 12 words — < 1%

Crossref

- 14 Lin, B.R.. "Novel Full-Bridge PWM Resonant Converter: Analysis and Implementation", IETE Journal of Research, 2015. 11 words — < 1%

Crossref

- 15 Abualkasim Bakeer, Andrii Chub, Dmitri Vinnikov. "Series Resonant DC-DC Converter with an AC-Switch-Based Full-Bridge Boost Rectifier", 2021 IEEE Applied Power Electronics Conference and Exposition (APEC), 2021 10 words — < 1%

Crossref

- 16 Mohammed Omar Ali, Ali Hussein Ahmad. "Design, modelling and simulation of controlled sepic DC-DC converter-based genetic algorithm", International Journal of Power Electronics and Drive Systems (IJPEDS), 2020 10 words — < 1%

Crossref

- 17 www.freepatentsonline.com 10 words — < 1%

Internet

- 18 www.irjet.net 10 words — < 1%

Internet

- 19 www.repository.cam.ac.uk 10 words — < 1%

Internet

- 20 Beiranvand, Reza, Bizhan Rashidian, Mohammad Reza Zolghadri, and Seyed Mohammad Hossein Alavi. "A Design Procedure for Optimizing the LLC Resonant 9 words — < 1%

Converter as a Wide Output Range Voltage Source", IEEE Transactions on Power Electronics, 2012.

Crossref

21 Bor-Ren Lin, Jyun-Ji Chen, Kun-Liang Shih. "Analysis and design of a soft-switching Sepic-Cuk converter", International Journal of Electronics, 2011

Crossref

22 F. Spertino, J. Ahmad, A. Ciocia, P. Di Leo. "A technique for tracking the global maximum power point of photovoltaic arrays under partial shading conditions", 2015 IEEE 6th International Symposium on Power Electronics for Distributed Generation Systems (PEDG), 2015

Crossref

23 Zhaoming Qian. "Three level LLC series resonant DC/DC converter", Nineteenth Annual IEEE Applied Power Electronics Conference and Exposition 2004 APEC 04, 2004

Crossref

24 isrjournals.org

Internet

25 research.ijcaonline.org

Internet

26 scholarsmine.mst.edu

Internet

27 www.researchgate.net

Internet

28 Khaligh, A., and S. Dusmez. "Comprehensive Topological Analysis of Conductive and Inductive

29 Tian Luo, Tomokazu Mishima, Ching-Ming Lai. "High Frequency Three-level Inverter-based Inductive Wireless Power Transfer (IWPT) System with Double LCC Resonance", 2021 IEEE Applied Power Electronics Conference and Exposition (APEC), 2021 8 words — < 1%

Crossref

30 Xiaonan Zhao, Lanhua Zhang, Qingqing Ma, Jih-Sheng Lai. "Modeling and control of a wide-input hybrid resonant microconverter for photovoltaic applications", 2016 Asian Conference on Energy, Power and Transportation Electrification (ACEPT), 2016 8 words — < 1%

Crossref

31 journaldatabase.info 8 words — < 1%

Internet

32 repository.tudelft.nl 8 words — < 1%

Internet

33 www.smartgrid.gov 8 words — < 1%

Internet

34 Asim Amir, Soib Taib, Shahid Iqbal. "Voltage multiplier-based continuous conduction LCCL series resonant inverter fed high voltage DC-DC converter", 2013 IEEE Symposium on Industrial Electronics & Applications, 2013 7 words — < 1%

Crossref

35 Bor-Ren Lin, Chien-Yeh Ho, Shang-Lun Wang, Huann-Keng Chiang, Jeng-Yu Chen. "Interleaved 7 words — < 1%

-
- 36 C.M. de Oliveira Stein, H.L. Hey. "A true ZCZVT
commutation cell for PWM converters", IEEE
Transactions on Power Electronics, 2000

6 words — < 1%

-
- 37 Chien, C.-H., Y.-H. Wang, and B.-R. Lin. "Zero-
voltage switching DC/DC converter with two half-
bridge legs and series-parallel transformers", IET Power
Electronics, 2012.

6 words — < 1%

-
- 38 Jeong, Gang-Youl, Su-Han Kwon, and Geun-Yong
Park. "Simple High Efficiency Full-Bridge DC-DC
Converter using a Series Resonant Capacitor", Journal of
Electrical Engineering and Technology, 2016.

6 words — < 1%