

Torque Ripple Minimization in Direct Torque Control at Low-Speed Operation using Alternate Switching Technique

by Zaid Aihsan

Submission date: 15-Jan-2022 05:31PM (UTC+0800)

Submission ID: 1742083640

File name: I_at_Low-Speed_Operation_using_Alternate_Switching_Technique.pdf (2.13M)

Word count: 5114

Character count: 27276

Torque Ripple Minimization in Direct Torque Control at Low-Speed Operation using Alternate Switching Technique

Muhammad Zaid Aihсан¹, Auzani Jidin², Azrita Alias², Siti Azura Ahmad Tarusan²,
Zuraidi Md Tahir², Tole Sutikno³

¹Faculty of Electrical Engineering Technology, University Malaysia Perlis (UniMAP), Malaysia

²Faculty of Electrical Engineering, Universiti Teknikal Malaysia Melaka (UTeM), Malaysia

²Power Electronics and Drives Research Group, CeRIA, UTeM, Malaysia

³Department of Electrical Engineering, Universitas Ahmad Dahlan, Yogyakarta, Indonesia

³Embedded System and Power Electronics Research Group (ESPERG), Yogyakarta, Indonesia

Article Info

Article history:

Received mm dd, yyyy

Revised mm dd, yyyy

Accepted mm dd, yyyy

Keywords:

AC Motor Drives
Direct Torque Control
Two-level Inverter
Alternate Switching
Torque Ripple

ABSTRACT

Direct Torque Control (DTC) of Induction Motor is prominent to offer instant torque and flux control with a simple control structure. However, this scheme suffers from two major drawbacks namely high torque ripple and variable switching frequency of the inverter, especially during low-speed operation. During the low-speed condition, the positive torque slope is very steep and torque overshoot frequently occurs, resulting in the torque ripple becoming of great significance. This paper proposes a novel and effective technique to reduce the torque ripple by integrating the alternate switching technique to the inverter switching status to limit the torque slope surge. By varying the frequency and duty cycle of the alternate switching, the surge rate can be controlled resulting in the chances of overshoots, and selection of reverse voltage vector can be avoided. The feasibility of the proposed technique has been validated using MATLAB/Simulink software and through experimental results. The results show the proposed alternate switching technique minimizes over 40% reduction in the torque ripple while maintaining the simple structure of DTC.

This is an open access article under the CC BY-SA license.



Corresponding Author:

Muhammad Zaid Aihсан

Faculty of Electrical Engineering Technology, University Malaysia Perlis, 02600 Arau, Perlis, Malaysia.

Email: zaid@unimap.edu.my

1. INTRODUCTION

Direct torque control (DTC) was developed over a decade ago to provide quick and accurate dynamic torque response and flux control with a simple construction [1]. This method is well-known for its control robustness. It relies less on machine parameters [2],[3] and does not require the complicated speed encoder, inner current regulation loop and field orientation block [4]. However, this system addressed two main problems namely high torque ripple and the variation of the switching frequency of the inverter according to operating conditions [5],[6].

Many methods have been proposed in recent years with various approaches to tackle these issues. For example, the implementation of the Direct Torque Control Space Vector Modulation (DTC-SVM) technique [7]-[9]. This technique ensures that the inverter switching frequency remains constant and combines with the benefits of the DTC method to improve the torque ripple. However, calculation of reference voltage space vectors is required and complex to solve. Another technique namely adjustable hysteresis band presented in [10]-[12], enables the reduction of the hysteresis band size resulting in accurate torque regulation, particularly when the pre-set sampling time is small. However, in practice, dSPACE-based DTC operates at a minimum sample rate of 50 μ s, which may cause the torque to travel between the upper and lower band vigorously,

resulting in overshoot and undershoot. In addition, the system will often select the reverse voltage vector during overshoot and undershoot, which may cause the system to produce the common DTC problem, namely variable switching frequency [13]-[15]. Integrating the DTC with predictive control has lately received much attention due to its capacity to minimise torque ripple and operate at a constant switching frequency [16]-[18]. However, this system demands a correct selection of weighting factors as incorrect weighting factors result in a greater torque and flux ripple. Several studies covered in [19]-[22] mainly use the duty cycle control concept employing an active voltage vector for a portion of a control period, which then switches to a zero-voltage vector for the remainder of the control cycle.

This paper proposes a novel technique to minimize the torque ripple by integrating the alternate digital pulsation into the inverter switching status of DTC. This technique is a simple and effective method as it improves the torque rate to travel within the hysteresis band precisely, thus avoiding the need for reverse voltage vectors. Theoretically, the rate of torque slope can be controlled by adjusting the DC link voltage manually. However, it is not practical for real DTC applications such as Electric Vehicle (EV) where the real EV uses supercapacitor or batteries as its main supply. The proposed technique is verified through simulation (MATLAB/Simulink) as well as experimental setup using dSPACE 1104 board and compared with conventional DTC scheme. The proposed structure of DTC is briefly described in Section II of the paper. Section III demonstrates the operation of the torque under the proposed scheme. Section IV presents simulation and experimental findings for the conventional and proposed techniques, respectively. Finally, Section V gives the conclusions to the paper.

2. THE PROPOSED DTC BASED ON AN ALTERNATE SWITCHING TECHNIQUE

The conventional DTC proposed [1] is straightforward. It combines of subsystems comprised of a pair of hysteresis comparators, torque and flux calculators, a look-up table, and a voltage-source inverter (VSI). In the proposed DTC system, each of the subsystems can be described in terms of space vectors by the following equations written in stator stationary reference frame:

$$v_s = r_s i_s + \frac{d\Psi_s}{dt} \quad (1)$$

$$0 = r_r i_r - j\omega_r \Psi_r + \frac{d\Psi_r}{dt} \quad (2)$$

$$\Psi_s = L_s i_s + L_m i_r \quad (3)$$

$$\Psi_r = L_r i_r + L_m i_s \quad (4)$$

$$T_e = \frac{3}{2} P |\Psi_s| |i_s| \sin\delta \quad (5)$$

where P denotes the number of pole pairs, ω_r denotes the rotor electric angular speed in rad/s, L_s , L_r and L_m denote the motor inductances, and δ is the angle between the stator flux linkage and the stator current space vectors. Based on equation (1), the d^s - and q^s - axis stator flux in a stationary reference frame may be expressed as:

$$\Psi_{s,d}^s = \int (v_{s,d}^s - i_{s,d}^s r_s) dt \quad (6a)$$

$$\Psi_{s,q}^s = \int (v_{s,q}^s - i_{s,q}^s r_s) dt \quad (6b)$$

The scope for this study will use the standard two-level inverter. Therefore the equations (6a) and (6b) can be further expressed in term of switching states S_a , S_b and S_c .

$$v_{s,d}^s = \frac{1}{3} V_{dc} (2S_a - S_b - S_c) \quad (7a)$$

$$v_{s,q}^s = \frac{1}{\sqrt{3}} V_{dc} (S_b - S_c) \quad (7b)$$

The electromagnetic torque given in (5) can be rewritten in d^f - and q^s - coordinates as:

$$T_e = \frac{3}{2}P(\Psi_{sd}^s i_{sq}^s - \Psi_{sq}^s i_{sd}^s) \tag{8}$$

The following equations (1) to (8) are modelled as in Figure 1 with an additional proposed alternate switching strategy. The proposed technique is in the form of a duty cycle will be added to the inverter switching state from the look-up table. By default, the conventional DTC system working principle is based on the output stator voltage applied based on the selection of the switching states S_a , S_b and S_c obtained from the look-up table. These switching states are chosen based on the need to increase or reduce the torque and stator flux, as well as the stator flux position.

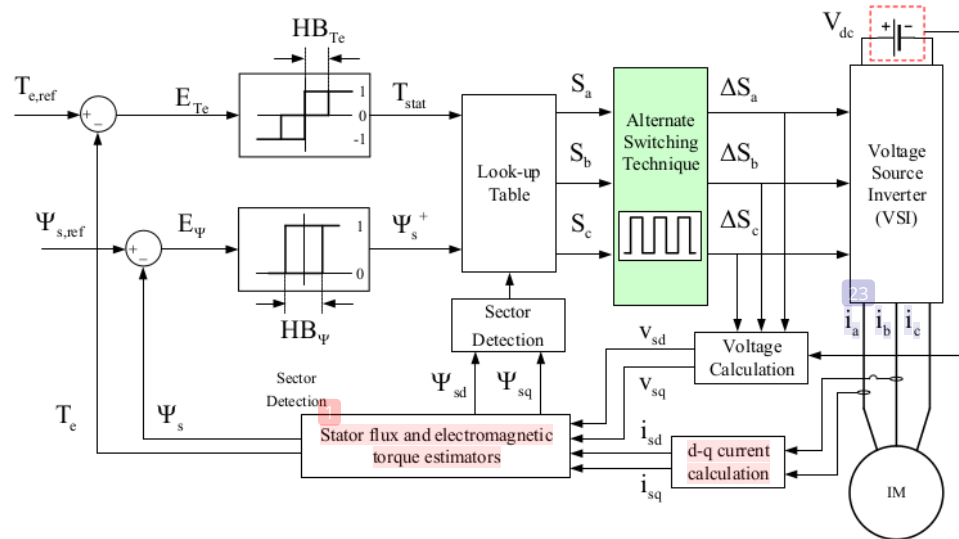


Figure 1. Proposed System with Alternate Switching Technique

The alternate switching technique will not affect the nature of the DTC concept; instead, it will control the rate of torque to travel inside the hysteresis band. As shown in Figure 2, the suggested method utilised the precise signal from the inverter switching state to integrate with square wave pulsation using an AND logic gate. The newly generated signals are defined as ΔS_a , ΔS_b and ΔS_c while the timing diagram for each signal is shown in Figure 3. The new signals are produced in the same sequence as the original DTC switching status, but with a different switching pattern.

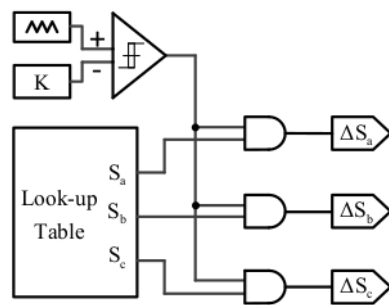


Figure 2. Proposed Alternate Switching Technique

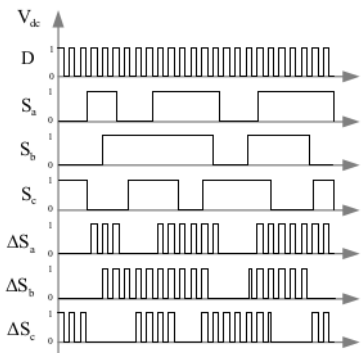


Figure 3. Alternated DTC switching signals

3. OPERATION OF TORQUE USING ALTERNATE SWITCHING TECHNIQUE

Whenever the induction motor is operated at a low speed, the low back Electromotive Force (EMF) may cause higher torque increment rates, resulting in an extremely steep torque slope to the point that torque excursion can be driven far beyond the hysteresis band. This situation generates a significant torque ripple, which must be corrected, particularly at low speeds [23]-[25]. Using the alternate switching technique injects the active voltage vector in the sequencing/alternate scheme, improving the performance for both torque and stator flux as it simultaneously limits the torque excursion within the hysteresis band. Furthermore, this allows the stator flux to move in the better zig-zag pattern, thus avoiding selecting a reserve voltage vector. To analyse the effect of voltage vectors on the torque ripple in DTC-hysteresis-based drives, the torque equation will be written in terms of stator and rotor flux magnitudes as follows:

$$T_e = \frac{3}{2} p \frac{L_m}{\sigma L_s L_r} \Psi_s \Psi_r \sin \delta_{sr} \quad (9)$$

where σ is the total leakage factor, while δ_{sr} is the angle between the stator and rotor flux vectors. This angle difference is critical in regulating the output torque.

Following from here, the equation in (9) can be rewritten by considering sampling time for every cycle, T_{sp} , given as:

$$\Psi_{s(k+1)} = \Psi_{s(k)} + \left[-\frac{R_s}{\sigma L_s} \Psi_{s(k)} + \frac{R_s L_M}{\sigma L_s L_r} \Psi_{r(k)} + v_s \right] T_{sp} \quad (10)$$

$$\Psi_{r(k+1)} = \Psi_{r(k)} + \left[\frac{R_r L_M}{\sigma L_s L_r} \Psi_{s(k)} + \pi \left(j\omega_r - \frac{R_r}{\sigma L_r} \right) \Psi_{r(k)} \right] T_{sp} \quad (11)$$

By substituting equation (10) and (11) into discrete form of equation (9), torque slopes during increment and decrement can be expressed as:

$$T_e^+ = -T_{e(k)} \left(\frac{R_s}{\sigma L_s} + \frac{R_r}{\sigma L_r} \right) + \frac{3 p}{2} \frac{L_m}{\sigma L_s L_r} i \left[(v_s \cdot \Psi_r) - j\omega_r (\Psi_s \cdot \Psi_r) \right] \quad (12)$$

$$T_e^- = -T_{e(k)} \left(\frac{R_s}{\sigma L_s} + \frac{R_r}{\sigma L_r} \right) - \frac{3 p}{2} \frac{L_m}{\sigma L_s L_r} i \left[j\omega_r (\Psi_s \cdot j\Psi_r) \right] \quad (13)$$

Moreover, the percentage of torque ripple can be calculated as follows:

$$\% \text{ of torque ripple} = \frac{\Delta \text{ torque ripple}}{\text{average torque}} \times 100\% \quad (14)$$

The following Figure 4(a) illustrated the conventional DTC torque increment, T_e^+ and torque decrement, T_e^- within one complete cycle of sampling time, T_{sp} . In each sampling time, the torque slope varies according to the duration of varies according to the duration of T_s of injected voltage vector, v_s . Figure 4(b) shows how the proposed alternate switching technique allows the active voltage vector to be in the form of an alternating sequence which it can limit the torque excursion rate. The alternate switching technique makes the value of T_s become way smaller, thus changing the state between positive torque slope and negative torque slope in a short time due to the alternating active voltage vector. The alternate switching technique uses the square waveform with a 50% duty ratio for ON-state and OFF-state respectively. For this study, the switching frequency used for the alternate switching is 2.5 kHz resulting in the rise and fall in the period of 200 μ s during

ON-state and OFF-state respectively. Using this concept allows limiting the torque excursion within the torque reference, T_c^* .

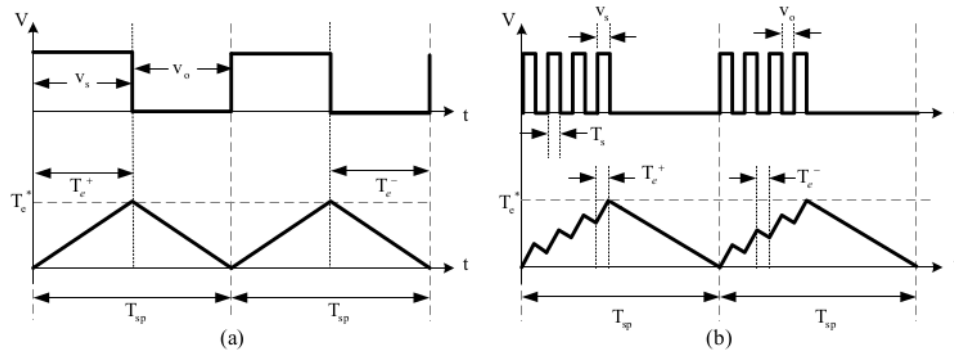


Figure 4. (a) Torque slope condition for conventional DTC scheme (b) Torque slope condition for proposed DTC scheme

The complete comparison of the conventional DTC to the proposed DTC demonstrated in Figure 5. In the conventional DTC, the active voltage vectors, V_s tend to generate the different variations of torque slopes which causes the high torque ripples and variable switching frequency. When the torque excursion is too high and exceed the hysteresis band, the system starts to choose reverse voltage vectors, $-V_s$ to ensure the sudden decrement in the torque magnitude. However, this will cause the torque to become unstable in a short period of time, increasing the probability of selecting reserve voltage vectors. The proposed DTC employs an alternate switching technique that allows the torque slopes to move in a zig-zag pattern, thus limiting the rate of excursion and resulting in a magnitude of torque within the torque estimation range. Since the magnitude of the torque does not exceed the hysteresis band limit, no reverse voltage vector selection is required. This enables the DTC system to operate with regulated torque performance, resulting in less ripple and an improvement in frequency variations.

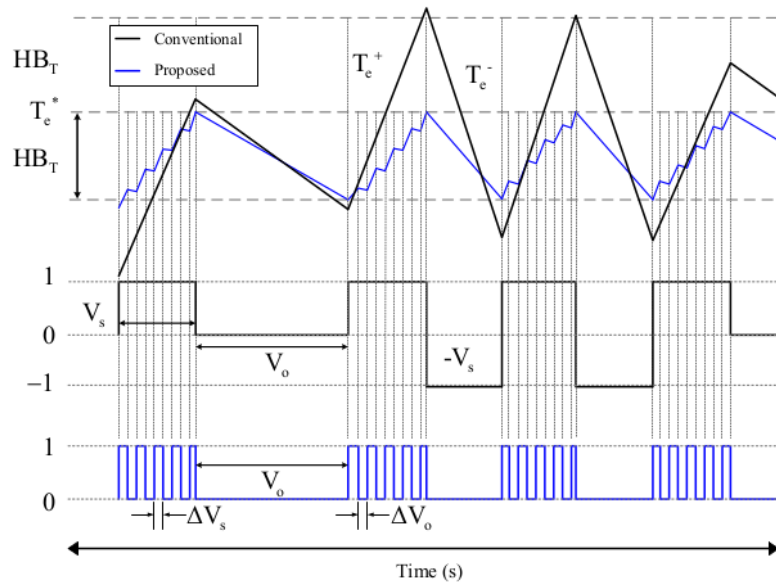


Figure 5. The comparison between conventional DTC and proposed DTC using alternate switching technique

4. RESULTS AND DISCUSSION


The efficacy of the proposed alternate switching technique was simulated using MATLAB/Simulink. Here, an experimental evaluation was carried out to show workability in the real DTC drive system. The parameters and specifications used for this experimental setup are shown in Table 1. Since this study focuses on the low-speed application, the induction motor speed is set to 30 rad/s, while the selected torque is 1.5 Nm for both conventional and proposed alternate switching techniques. Furthermore, rated torque and flux are 4Nm and 0.8452 Wb, respectively. The conventional DTC and the proposed method will be evaluated using two different hysteresis band sizes of 0.5 Nm and 0.25 Nm.

Table 1. Induction Machine parameters

Induction Machine	
Parameter	Value
Rated power, P	1.1 kW
Rated speed, $\omega_{m rated}$	2800 rpm
Stator Resistance, R_s	6.1 Ω
Rotor Resistance, R_r	6.2293 Ω
Mutual Inductance, L_m	0.4634 mH
Rotor self inductance, L_r	0.47979 mH
Stator self inductance, L_s	0.47979 mH
Number of pole pairs, P	2
Conventional and Alternate Switching of DTC system	
Torque Hysteresis band, HB_{T_e}	0.25 Nm and 0.5 Nm
Flux Hysteresis band, HB_{ϕ}	0.0080 Wb

4.1. Simulation Results

In this study, the focus is mainly on measuring the torque ripple's performance when using the alternate switching technique. Figure 6(a) shows the results of torque, phase voltages, and the condition of inverter switching status with the hysteresis band size 0.5. Initially, it is conducted in the conventional DTC method for the duration of 1.04 seconds before the alternate switching technique is employed. It is noticeable that the behaviour of phase voltage and inverter switching status started to be in high pulsation condition after 1.04 seconds, and the ripple of torque started to reduce when the alternate switching was initiated. The magnified version can be seen in Figures 6(b). The condition of torque in the conventional DTC is steeper and can easily reach the torque reference in a very short time. For the proposed technique, the torque is less steep, while the condition of torque slope imitates the pulsation pattern of the alternate switching technique. This feature allows the rate of torque to be controlled directly without adjusting the DC-link voltage. Moreover, the potential of torque to overshoot over the hysteresis band can be reduced efficiently. The uniform alternate voltage generation from the proposed technique allows the condition of increment and decrement of torque slope to travel within the hysteresis band with less overshoot and undershoot condition.

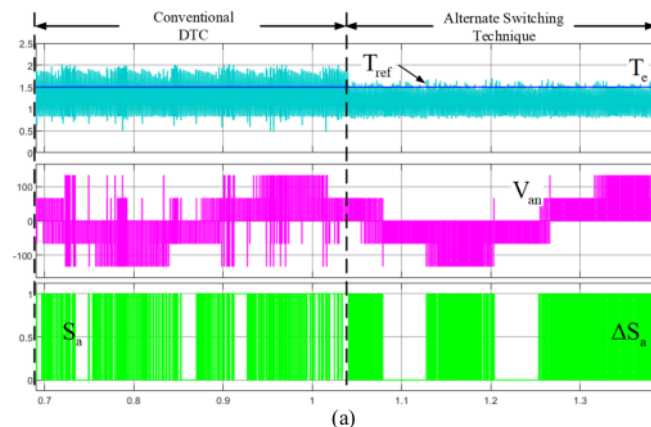

1

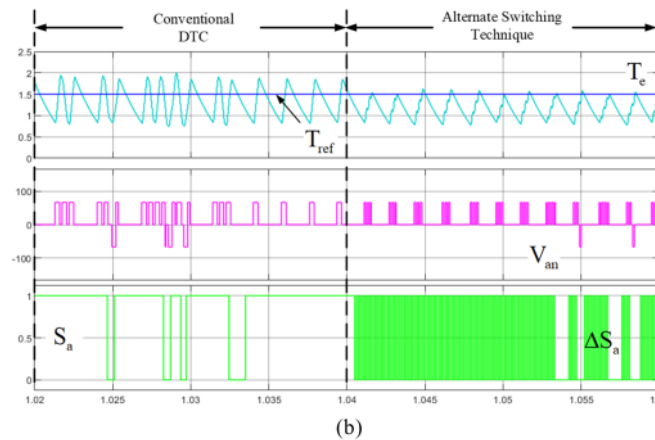
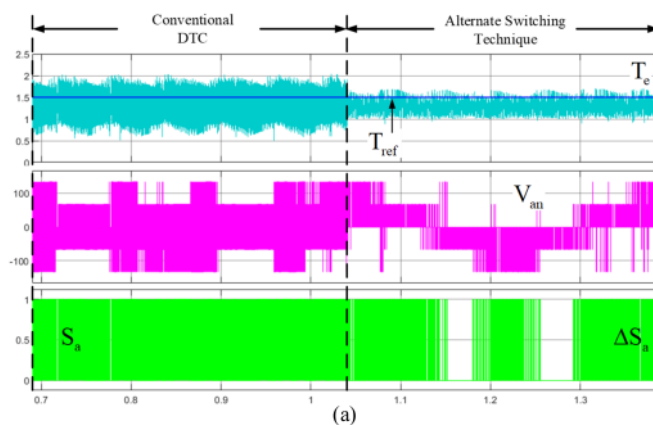


Figure 6. The performance of torque, phase voltage and inverter switching status under hysteresis band size 0.5 Nm. (a) Full scale (b) Magnified scale

The performance of the alternate switching is further tested with the lower hysteresis band size as the behaviour of torque using the alternate switching technique shown in Figure 7. It has a lower torque slope, while the rate of steepness can be controlled evenly for every peak cycle. Figure 7(a) shows the same results of torque, phase voltages, and the inverter switching status with the hysteresis band size 0.25. It can be observed that the condition of torque during conventional DTC suffers in high ripple conditions resulting in the selection of reverse voltage vectors occurring frequently. This condition is due to the torque being extremely steep during the low-speed condition and the small size of the hysteresis band, allowing the torque to be easily driven far beyond the hysteresis band regularly. However, when the alternate switching technique is utilised, the condition of torque ripple has a massive reduction, and the selection of reserve voltage vector is also reduced. The magnified version can be observed in Figure 7(b).

Figure 6 and Figure 7 shows the conventional DTC suffers from high selection of reverse voltage vectors and the waveform of phase voltage is not properly generated. The condition of phase voltage is improved when the alternate switching technique is used, and the reverse voltage vectors are rarely selected. Figure 7 depicts the worse case situation at the phase voltage compared to Figure 6, in which the system is operated with a smaller hysteresis band, making it easier to exceed the torque reference and hysteresis band limit. It is proven that the alternate switching technique allows the torque to be regulated uniformly even in the smaller size of the hysteresis band.



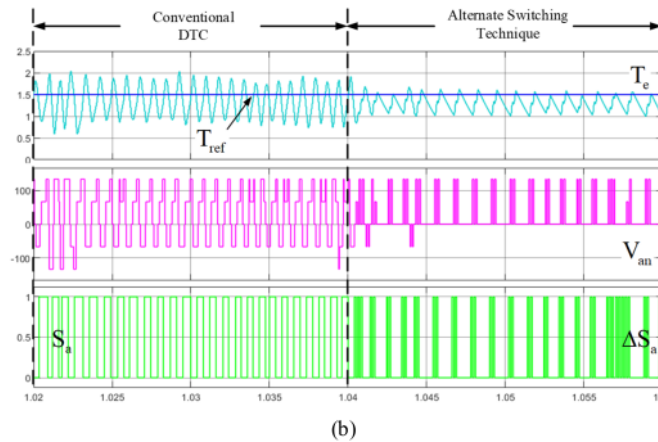


Figure 7. The performance of torque, phase voltage and inverter switching status under hysteresis band size 0.25 Nm. (a) Full scale (b) Magnified scale

4.2. Experimental Results

The complete DTC drive system, as in Figure 8, is set up to verify the proposed alternate switching technique experimentally. A three-phase two-level inverter drives the induction motor, while the load unit used in this system is the DC motor. Note that the load is proportional to the DC motor speed with additional resistive load. The main controller for this study is the dSPACE 1104, while the optimum sampling period for this device is 50 μ s.



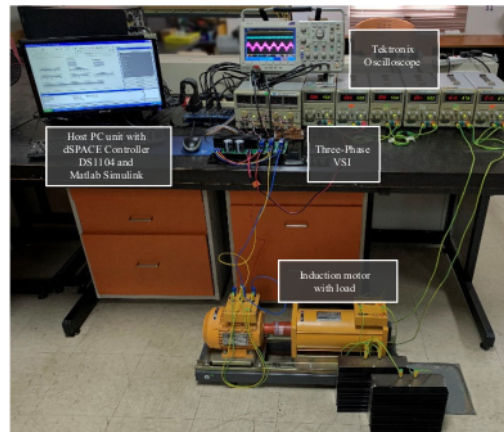


Figure 8. Experimental Setup of DTC drive system

For the experimental results, the same measurements are taken for the torque performance, phase voltage, and inverter switching status for both conventional DTC and proposed alternate switching techniques. Figure 9(a) shows the waveform capture under the duration of 40 ms. It is noticeable that the torque condition in the conventional DTC is very high in ripple, which has significantly reduced when the alternate switching technique is employed. Here, the torque starts to oscillate regularly under the torque reference.

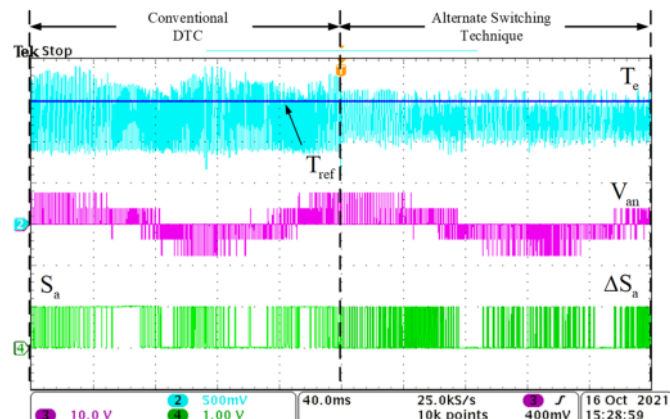

(a)

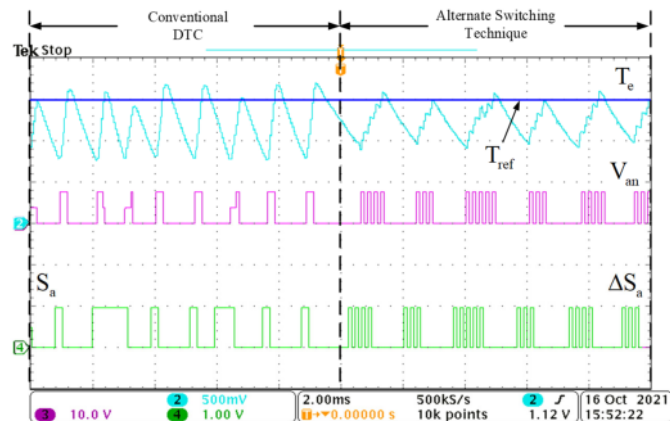

(b)

Figure 9. The performance of torque, phase voltage and inverter switching status under hysteresis band size 0.50 Nm. (a) Full scale (b) Magnified scale

Figure 9(b) shows the magnified version, which shows that the torque pattern changes drastically and in a uniform zig-zag pattern. As illustrated previously in Figure 4(b), the torque increment, T_c^+ and decrement, T_c^- now have a shorter time. The phase voltage and inverter switching status also start to operate in a high pulsation, but it does not change the initial condition of the DTC switching concept. This is due to the high pulsation operated under the same sequence as the conventional DTC, as shown in Figure 3.

The same investigation with lower hysteresis band size is tested for experimental testing, where the results are shown in Figures 10(a) and 10(b). The condition of torque in Figure 10(a) suffers even higher ripple compared to torque ripple in Figure 9(a) during the conventional DTC operation. In the same situation, when the alternate switching is employed, the torque ripple reduces significantly and follows the torque reference condition. As mentioned in section 3, the inverter switching status of the proposed technique will follow the same pattern of the conventional DTC scheme but with an alternate switching condition as in Figure 10(b). The torque pattern during the alternate switching technique is also in a uniform zig-zag pattern and rarely crosses the torque reference.

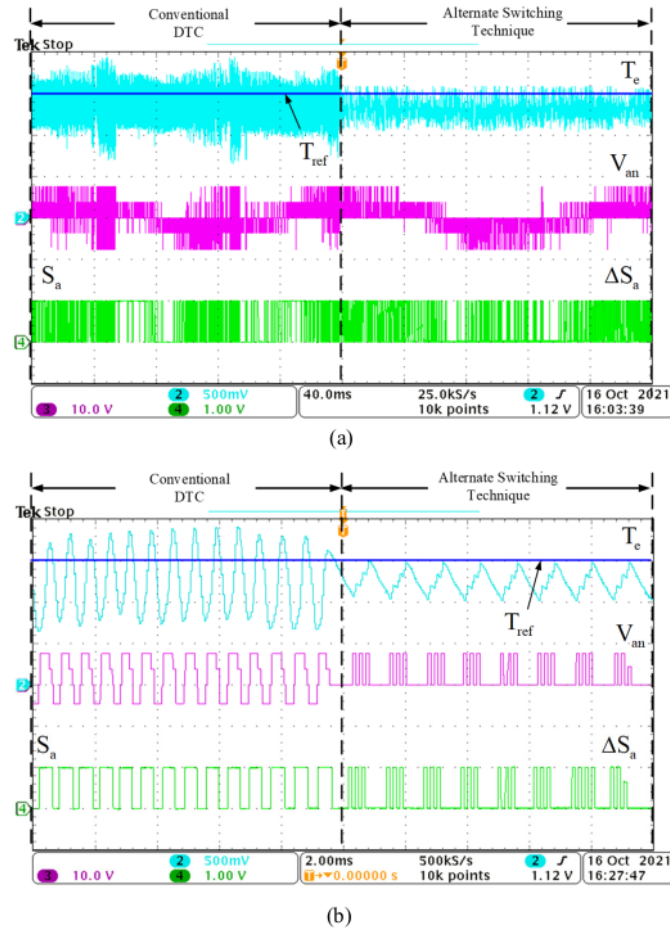


Figure 10. The performance of torque, phase voltage and inverter switching status under hysteresis band size 0.25 Nm. (a) Full scale (b) Magnified scale

5. CONCLUSION

























18

This paper proposes a novel and effective method to reduce the torque ripple in induction motor drives during low-speed operation. The proposed technique converts the standard voltage vectors into pulsation voltage vectors where the active and zero voltage vectors are separated into smaller widths, allowing the rate of torque increment and decrement to be reduced. By following the pulsation pattern, the increment of torque is now in a zig-zag pattern. This prevents the torque from crossing the torque reference and hysteresis band limit, which helps restrict the system from selecting the reserve voltage vectors. With this pattern, the proposed alternate switching technique in DTC promises the system to operate with regulated torque with less ripple and better frequency variations compared to the conventional DTC system. The viability of the proposed DTC has been demonstrated using MATLAB/Simulink and proven through lab-scale experimental assessment. The reduction in torque ripple using the alternate switching technique has significantly reduced over 40% in the low-speed operation while maintaining the basic structure of conventional DTC.

REFERENCES

- [1] I. Takahashi and T. Noguchi, "A New Quick-Response and High-Efficiency Control Strategy of an Induction Motor," *Industry Applications*, IEEE Transactions on, vol. IA-22, pp. 820-827, 1986.
- [2] A. A. Kadum, "New adaptive hysteresis band width control for direct torque control of induction machine drives," *Int. J. Power Electron. Drive Syst.*, vol. 11, pp. 1908-1917, 2020.
- [3] I. M. Alsofyani and K. B. Lee, "Enhanced Performance of Constant Frequency Torque Controller-Based Direct Torque Control of Induction Machines with Increased Torque-Loop Bandwidth," *IEEE Trans. Ind. Electron.*, vol. 67, pp. 10168-10179, 2020.
- [4] M. Magdy, S. Abu-Zaid, and M. A. Elwany, "Artificial intelligent techniques based on direct torque control of induction machines," *Int. J. Power Electron. Drive Syst.*, vol. 12, p. 2070, 2021.
- [5] H. Ismail, F. Patkar, A. Jidin, A. Z. Jidin, N. A. N. Azlan, and T. Sutikno, "Constant switching frequency and torque ripple minimization of DTC of induction motor drives with three-level NPC inverter," *Int. J. Power Electron. Drive Syst.*, vol. 8, pp. 1035-1049, 2017.
- [6] X. Chen, Z. Zhang, L. Yu, and Z. Bian, "An Improved Direct Instantaneous Torque Control of Doubly Salient Electromagnetic Machine for Torque Ripple Reduction," *IEEE Trans. Ind. Electron.*, vol. 68, pp. 6481-6492, 2021.
- [7] W. Xu, M. M. Ali, M. F. Elmorshedy, S. M. Allam, and C. Mu, "One Improved Sliding Mode DTC for Linear Induction Machines Based on Linear Metro," *IEEE Trans. Power Electron.*, vol. 36, pp. 4560-4571, 2021.
- [8] A. Berzoy, J. Rengifo, and O. Mohammed, "Fuzzy Predictive DTC of Induction Machines with Reduced Torque Ripple and High-Performance Operation," *IEEE Trans. Power Electron.*, vol. 33, pp. 2580-2587, 2018.
- [9] M. Sellah, A. Kouzou, M. Mohamed-Seghir, M. M. Rezaoui, R. Kennel, and M. Abdelrahem, "Improved DTC-SVM based on input-output feedback linearization technique applied on DOEWM powered by two dual indirect matrix converters," *Energies*, vol. 14, 2021.
- [10] Z. M. Tahir, A. Jidin, and M. L. M. Jamil, "Multi-carrier switching strategy for high-bandwidth potential balancing control of multilevel inverters," *Int. J. Power Electron. Drive Syst.*, vol. 12, pp. 2384-2392, 2021.
- [11] R. B. Jomala and C. Sai Babu, "A Modified Multiband Hysteresis Controlled DTC of Induction Machine with 27-level asymmetrical CHB-MLI with NVC modulation," *Ain Shams Eng. J.*, vol. 9, pp. 15-29, 2018.
- [12] S. Lakhimsetty, V. S. P. Satelli, R. S. Rathore, and V. T. Somasekhar, "Multilevel Torque Hysteresis-Band Based Direct-Torque Control Strategy for a Three-Level Open-End Winding Induction Motor Drive for Electric Vehicle Applications," *IEEE J. Emerg. Sel. Top. Power Electron.*, vol. 7, pp. 1969-1981, 2019.
- [13] N. R. N. Idris and A. H. M. Yatim, "Direct torque control of induction machines with constant switching frequency and reduced torque ripple," *IEEE Trans. Ind. Electron.*, vol. 51, pp. 758-767, 2004.
- [14] A. Jidin, N. R. N. Idris, A. H. M. Yatim, T. Sutikno, and M. E. Elbuluk, "An optimized switching strategy for quick dynamic torque control in DTC-hysteresis-based induction machines," *IEEE Trans. Ind. Electron.*, vol. 58, pp. 3391-3400, 2011.
- [15] S. A. A. Tarusan, A. Jidin, M. L. M. Jamil, K. A. Karim, and T. Sutikno, "A review of direct torque control development in various multilevel inverter applications," *Int. J. Power Electron. Drive Syst.*, vol. 11, pp. 1675-1688, 2020.
- [16] H. T. A. V. R. Teja, G. Bhuvanewari, and B. Singh, "Performance enhancement in a multilevel inverter fed PTC induction motor drive by optimal voltage vector selection," *Int. J. Power Electron. Drive Syst.*, vol. 10, p. 801, 2019.
- [17] H. Dan, P. Zeng, W. Xiong, M. Wen, M. Su and M. Rivera, "Model predictive control-based direct torque control for matrix converter-fed induction motor with reduced torque ripple," in *CES Transactions on Electrical Machines and Systems*, vol. 5, no. 2, pp. 90-99, June 2021.
- [18] Y. Cho, Y. Bak, and K. B. Lee, "Torque-Ripple Reduction and Fast Torque Response Strategy for Predictive Torque Control of Induction Motors," *IEEE Trans. Power Electron.*, vol. 33, pp. 2458-2470, 2018.
- [19] S. Lakhimsetty, V. S. P. Satelli, R. S. Rathore, and V. T. Somasekhar, "Multilevel Torque Hysteresis-Band Based Direct-Torque Control Strategy for a Three-Level Open-End Winding Induction Motor Drive for Electric Vehicle Applications," *IEEE J. Emerg. Sel. Top. Power Electron.*, vol. 7, pp. 1969-1981, 2019.
- [20] A. Nasr, C. Gu, X. Wang, G. Buticchi, S. Bozhko, and C. Gerada, "Torque-Performance Improvement for Direct Torque-Controlled PMSM Drives Based on Duty-Ratio Regulation," *IEEE Trans. Power Electron.*, vol. 37, pp. 749-760, 2022.
- [21] X. Lin, W. Huang, W. Jiang, Y. Zhao, Di. Dong, and X. Wu, "Direct Torque Control for Three-Phase Open-End Winding PMSM with Common DC Bus Based on Duty Ratio Modulation," *IEEE Trans. Power Electron.*, vol. 35, pp. 4216-4232, 2020.
- [22] X. Wu, W. Huang, X. Lin, W. Jiang, Y. Zhao, and S. Zhu, "Direct Torque Control for Induction Motors Based on Minimum Voltage Vector Error," *IEEE Trans. Ind. Electron.*, vol. 68, pp. 3794-3804, 2021.
- [23] P. Rajasekaran and V. J. Senthilkumar, "An improved DTFC based five levels - NPC inverter fed induction motor for torque ripple minimization," *International Journal of Power Electronics and Drive Systems*, vol. 7, pp. 531-542, 2016.
- [24] S. S. Hakami, I. M. Alsofyani, and K. B. Lee, "Torque Ripple Reduction and Flux-Droop Minimization of DTC with Improved Interleaving CSFTC of im Fed by Three-Level NPC Inverter," *IEEE Access*, vol. 7, pp. 184266-184275, 2019.
- [25] S. Allirani, N. Subha Lakshmi, and H. Vidhya, "Performance analysis on direct torque controlled induction motor drive with varying hysteresis controller bandwidth," *International Journal of Power Electronics and Drive Systems*, vol. 11, pp. 1165-1174, 2020.

BIOGRAPHIES OF AUTHORS

	<p>Muhammad Zaid Aihсан    received the B.Eng. and M.Sc. degrees in Electrical Engineering from Universiti Malaysia Perlis, Malaysia, in 2013 and 2016, respectively. He is currently working on the Ph.D. degree under Power Electronics and Drives Research Group (PEDG) in the Faculty of Electrical Engineering, Universiti Teknikal Malaysia Melaka (UTeM), Malaysia. He is a Lecturer at Universiti Malaysia Perlis (UniMAP), Malaysia. His research interests include the power electronics and motor drive systems.</p>
	<p>Auzani Jidin    received the B.Eng. degrees, M.Eng. degrees and Ph.D. degree in power electronics and drives from Universiti Teknologi Malaysia, Johor Bahru, Malaysia, in 2002, 2004 and 2011, respectively. He is currently an academician in Faculty of Electrical Engineering, Universiti Teknikal Malaysia Melaka, Melaka, Malaysia. He is also an active researcher in Power Electronics and Drives Research Group (PEDG) that established under the same faculty. His research interests include power electronics, motor drive systems, field-programmable gate array, and DSP applications.</p>
	<p>Azrita Alias    received her B. Eng in Electrical (Control and Instrumentation) (Hons) and M. Eng (Electrical) from the Universiti Teknologi Malaysia, in 2000 and 2003, respectively, and her PhD from University of Malaya in 2015. She is a senior lecturer at the Faculty of Electrical Engineering, Universiti Teknikal Malaysia Melaka (UTeM). Her main research interests are in modeling, control systems design and power electronics application in engineering systems.</p>
	<p>Siti Azura Ahmad Tarusan    received the B.Eng. degrees from Universiti Teknologi Malaysia, Johor Bahru, Malaysia, in 2008 and M.Eng. degrees from Universiti Malaya, Malaysia, in 2012. She is currently an academician in Faculty of Electrical Engineering, Universiti Teknikal Malaysia Melaka, Melaka, Malaysia. She is also an active researcher in Power Electronics and Drives Research Group (PEDG) that established under the same faculty. Her research interests include power electronics and motor drive systems.</p>
	<p>Zuraidi. Md. Tahir    Z. M. Tahir received the B.Eng. degrees from Universiti Teknologi Malaysia, Johor Bahru, Malaysia, in 2002 and M.Eng. degrees from Universiti Tun Hussien Onn, Malaysia, in 2013. He is currently pursuing PhD under Power Electronics and Drives Research Group (PEDG) in the Faculty of Electrical Engineering, Universiti Teknikal Malaysia Melaka, Melaka, Malaysia. His research interests include power electronics and motor drive systems.</p>
	<p>Tole Sutikno    is a Lecturer in Electrical Engineering Department at the Universitas Ahmad Dahlan (UAD), Yogyakarta, Indonesia. He received his B.Eng., M.Eng. and Ph.D. degree in Electrical Engineering from Universitas Diponegoro (Semarang, Indonesia), Universitas Gadjah Mada (Yogyakarta, Indonesia) and Universiti Teknologi Malaysia (Johor, Malaysia), in 1999, 2004 and 2016, respectively. He has been an Associate Professor in UAD, Yogyakarta, Indonesia since 2008. He is currently an Editor-in-Chief of the TELKOMNIKA, Director of LPPI UAD, and the Head of the Embedded Systems and Power Electronics Research Group. His research interests include the field of digital design, industrial electronics, industrial informatics, power electronics, motor drives, industrial applications, FPGA applications, artificial intelligence, intelligent control, embedded system and digital library.</p>

Torque Ripple Minimization in Direct Torque Control at Low-Speed Operation using Alternate Switching Technique

ORIGINALITY REPORT

18%

SIMILARITY INDEX

15%

INTERNET SOURCES

10%

PUBLICATIONS

3%

STUDENT PAPERS

PRIMARY SOURCES

1

ijpeds.iaescore.com

Internet Source

11%

2

Submitted to Universiti Teknologi Malaysia

Student Paper

2%

3

Hassan Farhan Rashag, S.P. Koh, Ahmed N. Abdalla, Nadia M.L. Tan, K.H. Chong.

"Modified Direct Torque Control using Algorithm Control of Stator Flux Estimation and Space Vector Modulation Based on Fuzzy Logic Control for Achieving High Performance from Induction Motors", Journal of Power Electronics, 2013

Publication

1%

4

A.H.M. Yatim. "Overmodulation and Field Weakening in Direct Torque Control of Induction Motor Drives", 2007 IEEE International Electric Machines & Drives Conference, 05/2007

Publication

1%

5

Internet Source

<1 %

6

Saurabh N. Pandya. "Torque Ripple Minimization in Direct Torque Control based IM Drive Part-I: Single-rate Control Strategy", 2008 Joint International Conference on Power System Technology and IEEE Power India Conference, 10/2008

Publication

<1 %

7

ijece.iaescore.com

Internet Source

<1 %

8

Maher Sidani, Fouad Mrad, Farid Chaaban. "Adaptive Direct Torque Control of Induction Motors", Electric Power Components and Systems, 2008

Publication

<1 %

9

K.-B. Lee, C.-H. Bae, F. Blaabjerg. "An improved DTC-SVM method for matrix converter drives using a deadbeat scheme", International Journal of Electronics, 2006

Publication

<1 %

10

Abdelli, R.. "Performances improvements and torque ripple minimization for VSI fed induction machine with direct control torque", ISA Transactions, 201104

Publication

<1 %

11

Submitted to Universiti Teknikal Malaysia
Melaka

Student Paper

<1 %

12

Alias, N. Faezah, Auzani Jidin, Huzainirah
Ismail, R.N. Firdaus, M. Khairi Rahim, Atikah
Razi, and Wahidah Abd. Halim. "A simple
potential balancing strategy for neutral-point-
clamped inverter fed direct torque control
induction machines", 2015 IEEE 11th
International Conference on Power
Electronics and Drive Systems, 2015.

Publication

<1 %

13

Huzainirah Ismail, Auzani Jidin, Fazlli Patkar, S.
Azura Tarusan, Atikah Razi, M. Khairi Rahim.
"Constant switching frequency torque
controller for DTC of induction motor drives
with three-level NPC inverter", 2016 IEEE
International Conference on Power and
Energy (PECon), 2016

Publication

<1 %

14

Youness El Mourabit, Aziz Derouich, Abdelaziz
El Ghzizal, Najib El Ouanjli, Othmane
Zamzoum. "DTC-SVM Control for Permanent
Magnet Synchronous Generator based
Variable Speed Wind Turbine", International
Journal of Power Electronics and Drive
Systems (IJPEDS), 2017

Publication

<1 %

15 Zainal Salam, Toh Leong Soon, Mohd. Zulkifli Ramli. "Hardware Implementation of the High Frequency Link Inverter Using the dSPACE DS1104 Digital Signal Processing Board", 2006 IEEE International Power and Energy Conference, 2006
Publication <1 %

16 www.camjol.info
Internet Source <1 %

17 www.irjet.net
Internet Source <1 %

18 Lecture Notes in Electrical Engineering, 2015.
Publication <1 %

19 M. Hariharan, Vikneswaran Vijejan, R. Sindhu, P. Divakar, A. Saidatul, Sazali Yaacob. "Classification of mental tasks using stockwell transform", Computers & Electrical Engineering, 2014
Publication <1 %

20 Samer Saleh Hakami, Kyo-Beum Lee. "Modified Direct Torque Control for Fast Dynamics PMSM Drives fed by Three-Level NPC Inverter", 2021 24th International Conference on Electrical Machines and Systems (ICEMS), 2021
Publication <1 %

21

Internet Source

<1 %

22

Chen, Zengpin, Biao Guo, Hongzhe Han, Anil K. Jain, Tianxu Zhang, Yaoting Zhu, Mingyue Ding, and Jianguo Liu. "", International Symposium on Multispectral Image Processing (ISMIP 98), 1998.

Publication

<1 %

23

Huzainirah Ismail, Fazlli Patkar, Auzani Jidin, R. Sundram, M. Khairi Rahim, Yusnida Tarmizi, Atikah Razi. "Direct Torque Control of induction machine using 3-level neutral point clamped inverter", 2015 IEEE Student Conference on Research and Development (SCOReD), 2015

Publication

<1 %

Exclude quotes On

Exclude matches Off

Exclude bibliography On

Torque Ripple Minimization in Direct Torque Control at Low-Speed Operation using Alternate Switching Technique

GRADEMARK REPORT

FINAL GRADE

/0

GENERAL COMMENTS

Instructor

PAGE 1

PAGE 2

PAGE 3

PAGE 4

PAGE 5

PAGE 6

PAGE 7

PAGE 8

PAGE 9

PAGE 10

PAGE 11

PAGE 12
