

ISSN 1726-5479

# SENSORS & TRANSDUCERS

vol. 114  
**3** / 10



## Smart Sensors and Systems

International Frequency Sensor Association Publishing



**Editors-in-Chief:** professor Sergey Y. Yurish, tel.: +34 696067716, fax: +34 93 4011989, e-mail: editor@sensorsportal.com

**Editors for Western Europe**

Meijer, Gerard C.M., Delft University of Technology, The Netherlands  
Ferrari, Vittorio, Università di Brescia, Italy

**Editor South America**

Costa-Felix, Rodrigo, Inmetro, Brazil

**Editor for Eastern Europe**

Sachenko, Anatoly, Ternopil State Economic University, Ukraine

**Editors for North America**

Datskos, Panos G., Oak Ridge National Laboratory, USA  
Fabien, J. Josse, Marquette University, USA  
Katz, Evgeny, Clarkson University, USA

**Editor for Asia**

Ohyama, Shinji, Tokyo Institute of Technology, Japan

**Editor for Asia-Pacific**

Mukhopadhyay, Subhas, Massey University, New Zealand

**Editorial Advisory Board**

- Abdul Rahim, Ruzairi**, Universiti Teknologi, Malaysia  
**Ahmad, Mohd Noor**, Northern University of Engineering, Malaysia  
**Annamalai, Karthigeyan**, National Institute of Advanced Industrial Science and Technology, Japan  
**Arcega, Francisco**, University of Zaragoza, Spain  
**Arguel, Philippe**, CNRS, France  
**Ahn, Jae-Young**, Korea Institute of Science and Technology, Korea  
**Arndt, Michael**, Robert Bosch GmbH, Germany  
**Ascoli, Giorgio**, George Mason University, USA  
**Atalay, Selcuk**, Inonu University, Turkey  
**Atghiaee, Ahmad**, University of Tehran, Iran  
**Augutis, Vygantas**, Kaunas University of Technology, Lithuania  
**Avachit, Patil Lalchand**, North Maharashtra University, India  
**Ayesh, Aladdin**, De Montfort University, UK  
**Bahreyni, Behraad**, University of Manitoba, Canada  
**Baliga, Shankar, B.**, General Motors Transnational, USA  
**Baoxian, Ye**, Zhengzhou University, China  
**Barford, Lee**, Agilent Laboratories, USA  
**Barlingay, Ravindra**, RF Arrays Systems, India  
**Basu, Sukumar**, Jadavpur University, India  
**Beck, Stephen**, University of Sheffield, UK  
**Ben Bouzid, Sihem**, Institut National de Recherche Scientifique, Tunisia  
**Benachaiba, Chellali**, Universitaire de Bechar, Algeria  
**Binnie, T. David**, Napier University, UK  
**Bischoff, Gerlinde**, Inst. Analytical Chemistry, Germany  
**Bodas, Dhananjay**, IMTEK, Germany  
**Borges Carval, Nuno**, Universidade de Aveiro, Portugal  
**Bousbia-Salah, Mounir**, University of Annaba, Algeria  
**Bouvet, Marcel**, CNRS – UPMC, France  
**Brudzewski, Kazimierz**, Warsaw University of Technology, Poland  
**Cai, Chenxin**, Nanjing Normal University, China  
**Cai, Qingyun**, Hunan University, China  
**Campanella, Luigi**, University La Sapienza, Italy  
**Carvalho, Vitor**, Minho University, Portugal  
**Cecelja, Franjo**, Brunel University, London, UK  
**Cerda Belmonte, Judith**, Imperial College London, UK  
**Chakrabarty, Chandan Kumar**, Universiti Tenaga Nasional, Malaysia  
**Chakravorty, Dipankar**, Association for the Cultivation of Science, India  
**Changhai, Ru**, Harbin Engineering University, China  
**Chaudhari, Gajanan**, Shri Shivaji Science College, India  
**Chavali, Murthy**, VIT University, Tamil Nadu, India  
**Chen, Jiming**, Zhejiang University, China  
**Chen, Rongshun**, National Tsing Hua University, Taiwan  
**Cheng, Kuo-Sheng**, National Cheng Kung University, Taiwan  
**Chiang, Jeffrey (Cheng-Ta)**, Industrial Technol. Research Institute, Taiwan  
**Chiriac, Horia**, National Institute of Research and Development, Romania  
**Chowdhuri, Arijit**, University of Delhi, India  
**Chung, Wen-Yaw**, Chung Yuan Christian University, Taiwan  
**Corres, Jesus**, Universidad Publica de Navarra, Spain  
**Cortes, Camilo A.**, Universidad Nacional de Colombia, Colombia  
**Courtois, Christian**, Universite de Valenciennes, France  
**Cusano, Andrea**, University of Sannio, Italy  
**D'Amico, Arnaldo**, Università di Tor Vergata, Italy  
**De Stefano, Luca**, Institute for Microelectronics and Microsystem, Italy  
**Deshmukh, Kiran**, Shri Shivaji Mahavidyalaya, Barshi, India  
**Dickert, Franz L.**, Vienna University, Austria  
**Dieguez, Angel**, University of Barcelona, Spain  
**Dimitropoulos, Panos**, University of Thessaly, Greece  
**Ding, Jianning**, Jiangsu Polytechnic University, China  
**Kim, Min Young**, Kyungpook National University, Korea South  
**Djordjevic, Alexandar**, City University of Hong Kong, Hong Kong  
**Donato, Nicola**, University of Messina, Italy  
**Donato, Patricio**, Universidad de Mar del Plata, Argentina  
**Dong, Feng**, Tianjin University, China  
**Drljaca, Predrag**, Instersema Sensoric SA, Switzerland  
**Dubey, Venketesh**, Bournemouth University, UK  
**Enderle, Stefan**, Univ. of Ulm and KTB Mechatronics GmbH, Germany  
**Erdem, Gursan K. Arzum**, Ege University, Turkey  
**Erkmen, Aydan M.**, Middle East Technical University, Turkey  
**Estelle, Patrice**, Insa Rennes, France  
**Estrada, Horacio**, University of North Carolina, USA  
**Faiz, Adil**, INSA Lyon, France  
**Fericean, Sorin**, Balluff GmbH, Germany  
**Fernandes, Joana M.**, University of Porto, Portugal  
**Francioso, Luca**, CNR-IMM Institute for Microelectronics and Microsystems, Italy  
**Francis, Laurent**, University Catholique de Louvain, Belgium  
**Fu, Weiling**, South-Western Hospital, Chongqing, China  
**Gaura, Elena**, Coventry University, UK  
**Geng, Yanfeng**, China University of Petroleum, China  
**Gole, James**, Georgia Institute of Technology, USA  
**Gong, Hao**, National University of Singapore, Singapore  
**Gonzalez de la Rosa, Juan Jose**, University of Cadiz, Spain  
**Grael, Annette**, Goteborg University, Sweden  
**Graff, Mason**, The University of Texas at Arlington, USA  
**Guan, Shan**, Eastman Kodak, USA  
**Guillet, Bruno**, University of Caen, France  
**Guo, Zhen**, New Jersey Institute of Technology, USA  
**Gupta, Narendra Kumar**, Napier University, UK  
**Hadjiloucas, Sillas**, The University of Reading, UK  
**Haider, Mohammad R.**, Sonoma State University, USA  
**Hashsham, Syed**, Michigan State University, USA  
**Hasni, Abdelhafid**, Bechar University, Algeria  
**Hernandez, Alvaro**, University of Alcalá, Spain  
**Hernandez, Wilmar**, Universidad Politecnica de Madrid, Spain  
**Homentcovschi, Dorel**, SUNY Binghamton, USA  
**Horstman, Tom**, U.S. Automation Group, LLC, USA  
**Hsiai, Tzung (John)**, University of Southern California, USA  
**Huang, Jeng-Sheng**, Chung Yuan Christian University, Taiwan  
**Huang, Star**, National Tsing Hua University, Taiwan  
**Huang, Wei**, PSG Design Center, USA  
**Hui, David**, University of New Orleans, USA  
**Jaffrezic-Renault, Nicole**, Ecole Centrale de Lyon, France  
**Jaime Calvo-Galleg, Jaime**, Universidad de Salamanca, Spain  
**James, Daniel**, Griffith University, Australia  
**Janting, Jakob**, DELTA Danish Electronics, Denmark  
**Jiang, Liudi**, University of Southampton, UK  
**Jiang, Wei**, University of Virginia, USA  
**Jiao, Zheng**, Shanghai University, China  
**John, Joachim**, IMEC, Belgium  
**Kalach, Andrew**, Voronezh Institute of Ministry of Interior, Russia  
**Kang, Moonho**, Sunmoon University, Korea South  
**Kaniusas, Eugenijus**, Vienna University of Technology, Austria  
**Katake, Anup**, Texas A&M University, USA  
**Kausel, Wilfried**, University of Music, Vienna, Austria  
**Kavasoglu, Nese**, Mugla University, Turkey  
**Ke, Cathy**, Tyndall National Institute, Ireland  
**Khan, Asif**, Aligarh Muslim University, Aligarh, India  
**Sapozhnikova, Ksenia**, D.I.Mendeleyev Institute for Metrology, Russia  
**Saxena, Vibha**, Bhabha Atomic Research Centre, Mumbai, India

**Ko, Sang Choon**, Electronics. and Telecom. Research Inst., Korea South  
**Kockar, Hakan**, Balikesir University, Turkey  
**Kotulska, Malgorzata**, Wroclaw University of Technology, Poland  
**Kratz, Henrik**, Uppsala University, Sweden  
**Kumar, Arun**, University of South Florida, USA  
**Kumar, Subodh**, National Physical Laboratory, India  
**Kung, Chih-Hsien**, Chang-Jung Christian University, Taiwan  
**Lacnjevac, Caslav**, University of Belgrade, Serbia  
**Lay-Ekuakille, Aime**, University of Lecce, Italy  
**Lee, Jang Myung**, Pusan National University, Korea South  
**Lee, Jun Su**, Amkor Technology, Inc. South Korea  
**Lei, Hua**, National Starch and Chemical Company, USA  
**Li, Genxi**, Nanjing University, China  
**Li, Hui**, Shanghai Jiaotong University, China  
**Li, Xian-Fang**, Central South University, China  
**Liang, Yuanchang**, University of Washington, USA  
**Liawruangrath, Saisunee**, Chiang Mai University, Thailand  
**Liew, Kim Meow**, City University of Hong Kong, Hong Kong  
**Lin, Hermann**, National Kaohsiung University, Taiwan  
**Lin, Paul**, Cleveland State University, USA  
**Linderholm, Pontus**, EPFL - Microsystems Laboratory, Switzerland  
**Liu, Aihua**, University of Oklahoma, USA  
**Liu Changgeng**, Louisiana State University, USA  
**Liu, Cheng-Hsien**, National Tsing Hua University, Taiwan  
**Liu, Songqin**, Southeast University, China  
**Lodeiro, Carlos**, University of Vigo, Spain  
**Lorenzo, Maria Encarnacio**, Universidad Autonoma de Madrid, Spain  
**Lukaszewicz, Jerzy Pawel**, Nicholas Copernicus University, Poland  
**Ma, Zhanfang**, Northeast Normal University, China  
**Majstorovic, Vidosav**, University of Belgrade, Serbia  
**Marquez, Alfredo**, Centro de Investigacion en Materiales Avanzados, Mexico  
**Matay, Ladislav**, Slovak Academy of Sciences, Slovakia  
**Mathur, Prafull**, National Physical Laboratory, India  
**Maurya, D.K.**, Institute of Materials Research and Engineering, Singapore  
**Mekid, Samir**, University of Manchester, UK  
**Melnyk, Ivan**, Photon Control Inc., Canada  
**Mendes, Paulo**, University of Minho, Portugal  
**Mennell, Julie**, Northumbria University, UK  
**Mi, Bin**, Boston Scientific Corporation, USA  
**Minas, Graca**, University of Minho, Portugal  
**Moghavvemi, Mahmoud**, University of Malaya, Malaysia  
**Mohammadi, Mohammad-Reza**, University of Cambridge, UK  
**Molina Flores, Esteban**, Benemérita Universidad Autónoma de Puebla, Mexico  
**Moradi, Majid**, University of Kerman, Iran  
**Morello, Rosario**, University "Mediterranea" of Reggio Calabria, Italy  
**Mounir, Ben Ali**, University of Sousse, Tunisia  
**Mulla, Imtiaz Sirajuddin**, National Chemical Laboratory, Pune, India  
**Neelamegam, Periasamy**, Sastra Deemed University, India  
**Neshkova, Milka**, Bulgarian Academy of Sciences, Bulgaria  
**Oberhammer, Joachim**, Royal Institute of Technology, Sweden  
**Ould Lahoucine, Cherif**, University of Guelma, Algeria  
**Pamidighanta, Sayanu**, Bharat Electronics Limited (BEL), India  
**Pan, Jisheng**, Institute of Materials Research & Engineering, Singapore  
**Park, Joon-Shik**, Korea Electronics Technology Institute, Korea South  
**Penza, Michele**, ENEA C.R., Italy  
**Pereira, Jose Miguel**, Instituto Politecnico de Setebal, Portugal  
**Petsev, Dimiter**, University of New Mexico, USA  
**Pogacnik, Lea**, University of Ljubljana, Slovenia  
**Post, Michael**, National Research Council, Canada  
**Prance, Robert**, University of Sussex, UK  
**Prasad, Ambika**, Gulbarga University, India  
**Prateepasen, Asa**, Kingmoungut's University of Technology, Thailand  
**Pullini, Daniele**, Centro Ricerche FIAT, Italy  
**Pumera, Martin**, National Institute for Materials Science, Japan  
**Radhakrishnan, S.**, National Chemical Laboratory, Pune, India  
**Rajanna, K.**, Indian Institute of Science, India  
**Ramadan, Qasem**, Institute of Microelectronics, Singapore  
**Rao, Basuthkar**, Tata Inst. of Fundamental Research, India  
**Raouf, Kosai**, Joseph Fourier University of Grenoble, France  
**Reig, Candid**, University of Valencia, Spain  
**Restivo, Maria Teresa**, University of Porto, Portugal  
**Robert, Michel**, University Henri Poincare, France  
**Rezazadeh, Ghader**, Urmia University, Iran  
**Royo, Santiago**, Universitat Politecnica de Catalunya, Spain  
**Rodriguez, Angel**, Universidad Politecnica de Cataluna, Spain  
**Rothberg, Steve**, Loughborough University, UK  
**Sadana, Ajit**, University of Mississippi, USA  
**Sadeghian Marnani, Hamed**, TU Delft, The Netherlands  
**Sandacci, Serghei**, Sensor Technology Ltd., UK  
**Schneider, John K.**, Ultra-Scan Corporation, USA  
**Seif, Selemeni**, Alabama A & M University, USA  
**Seifter, Achim**, Los Alamos National Laboratory, USA  
**Sengupta, Deepak**, Advance Bio-Photonics, India  
**Shearwood, Christopher**, Nanyang Technological University, Singapore  
**Shin, Kyuho**, Samsung Advanced Institute of Technology, Korea  
**Shmaliy, Yuriy**, Kharkiv National Univ. of Radio Electronics, Ukraine  
**Silva Girao, Pedro**, Technical University of Lisbon, Portugal  
**Singh, V. R.**, National Physical Laboratory, India  
**Slomovitz, Daniel**, UTE, Uruguay  
**Smith, Martin**, Open University, UK  
**Soleymannpour, Ahmad**, Damghan Basic Science University, Iran  
**Somani, Prakash R.**, Centre for Materials for Electronics Technol., India  
**Srinivas, Talabattula**, Indian Institute of Science, Bangalore, India  
**Srivastava, Arvind K.**, Northwestern University, USA  
**Stefan-van Staden, Raluca-Ioana**, University of Pretoria, South Africa  
**Sumriddetchka, Sarun**, National Electronics and Computer Technology Center, Thailand  
**Sun, Chengliang**, Polytechnic University, Hong-Kong  
**Sun, Dongming**, Jilin University, China  
**Sun, Junhua**, Beijing University of Aeronautics and Astronautics, China  
**Sun, Zhiqiang**, Central South University, China  
**Suri, C. Raman**, Institute of Microbial Technology, India  
**Sysoev, Victor**, Saratov State Technical University, Russia  
**Szewczyk, Roman**, Industrial Research Inst. for Automation and Measurement, Poland  
**Tan, Ooi Kiang**, Nanyang Technological University, Singapore  
**Tang, Dianping**, Southwest University, China  
**Tang, Jaw-Luen**, National Chung Cheng University, Taiwan  
**Teker, Kasif**, Frostburg State University, USA  
**Thumbavanam Pad, Kartik**, Carnegie Mellon University, USA  
**Tian, Gui Yun**, University of Newcastle, UK  
**Tsiantos, Vassilios**, Technological Educational Institute of Kaval, Greece  
**Tsigara, Anna**, National Hellenic Research Foundation, Greece  
**Twomey, Karen**, University College Cork, Ireland  
**Valente, Antonio**, University, Vila Real, - U.T.A.D., Portugal  
**Vaseashta, Ashok**, Marshall University, USA  
**Vazquez, Carmen**, Carlos III University in Madrid, Spain  
**Vieira, Manuela**, Instituto Superior de Engenharia de Lisboa, Portugal  
**Vigna, Benedetto**, STMicroelectronics, Italy  
**Vrba, Radimir**, Brno University of Technology, Czech Republic  
**Wandelt, Barbara**, Technical University of Lodz, Poland  
**Wang, Jiangping**, Xi'an Shiyou University, China  
**Wang, Kedong**, Beihang University, China  
**Wang, Liang**, Pacific Northwest National Laboratory, USA  
**Wang, Mi**, University of Leeds, UK  
**Wang, Shinn-Fwu**, Ching Yun University, Taiwan  
**Wang, Wei-Chih**, University of Washington, USA  
**Wang, Wensheng**, University of Pennsylvania, USA  
**Watson, Steven**, Center for NanoSpace Technologies Inc., USA  
**Weiping, Yan**, Dalian University of Technology, China  
**Wells, Stephen**, Southern Company Services, USA  
**Wolkenberg, Andrzej**, Institute of Electron Technology, Poland  
**Woods, R. Clive**, Louisiana State University, USA  
**Wu, DerHo**, National Pingtung Univ. of Science and Technology, Taiwan  
**Wu, Zhaoyang**, Hunan University, China  
**Xiu Tao, Ge**, Chuzhou University, China  
**Xu, Lisheng**, The Chinese University of Hong Kong, Hong Kong  
**Xu, Tao**, University of California, Irvine, USA  
**Yang, Dongfang**, National Research Council, Canada  
**Yang, Wuqiang**, The University of Manchester, UK  
**Yang, Xiaoling**, University of Georgia, Athens, GA, USA  
**Yaping Dan**, Harvard University, USA  
**Ymeti, Aurel**, University of Twente, Netherland  
**Yong Zhao**, Northeastern University, China  
**Yu, Haihu**, Wuhan University of Technology, China  
**Yuan, Yong**, Massey University, New Zealand  
**Yufera Garcia, Alberto**, Seville University, Spain  
**Zakaria, Zulkarnay**, University Malaysia Perlis, Malaysia  
**Zagnoni, Michele**, University of Southampton, UK  
**Zamani, Cyrus**, Universitat de Barcelona, Spain  
**Zeni, Luigi**, Second University of Naples, Italy  
**Zhang, Minglong**, Shanghai University, China  
**Zhang, Quintao**, University of California at Berkeley, USA  
**Zhang, Weiping**, Shanghai Jiao Tong University, China  
**Zhang, Wenming**, Shanghai Jiao Tong University, China  
**Zhang, Xueji**, World Precision Instruments, Inc., USA  
**Zhong, Haoxiang**, Henan Normal University, China  
**Zhu, Qing**, Fujifilm Dimatix, Inc., USA  
**Zorzano, Luis**, Universidad de La Rioja, Spain  
**Zourab, Mohammed**, University of Cambridge, UK

# Contents

Volume 114  
Issue 3  
March 2010

www.sensorsportal.com

ISSN 1726-5479

## Editorial

### Sensors: Smart vs. Intelligent

*Sergey Y. Yurish*..... 1

## Research Articles

### Novel Sensors for Food Inspections

*Mohd. Syaifudin Bin Abdul Rahman, Subhas C. Mukhopadhyay and Pak Lam Yu* ..... 1

### A Neural Network Approach to Fluid Level Measurement in Dynamic Environments Using a Single Capacitive Sensor

*Edin Terzic, Romesh Nagarajah, Muhammad Alamgir* ..... 41

### Novel Orthogonal Signal Based Decomposition of Digital Signals: Application to Sensor Fusion

*Abdul Faheem Mohed, Garimella Rama Murthy and Ram Bilas Pachori* ..... 56

### A Multiobjective Fuzzy Inference System based Deployment Strategy for a Distributed Mobile Sensor Network

*Amol P. Bhondekar, Gagan Jindal, T. Ramakrishna Reddy, C. Ghanshyam, Ashavani Kumar, Pawan Kapur and M. L. Singla* ..... 66

### A Low Cost and High Speed Electrical Capacitance Tomography System Design

*Ruzairi Abdul Rahim, Zhen Cong Tee, Mohd Hafiz Fazalul Rahiman, Jayasuman Puspanathan.* . 83

### Fiber Optic Long Period Grating Based Sensor for Coconut Oil Adulteration Detection

*T. M. Libish, J. Linesh, P. Biswas, S. Bandyopadhyay, K. Dasgupta and P. Radhakrishnan* ..... 102

### Type Identification of Unknown Thermocouple Using Principle Component Analysis

*Palash Kundu and Gautam Sarkar*..... 112

### A Dynamic Micro Force Sensing Probe Based on PVDF

*Qiangxian Huang, Kang Ni, Nan Shi, Maosheng Hou, Xiaolong Wang*..... 122

### LED-Based Colour Sensing System

*Ibrahim Al-Bahadly and Rashid Berndt* ..... 132

### Design and Development of Black Box for Analyzing Accidents in Indian Railways

*Alka Dubey and Ashish Verma*..... 151

### Use of the Maximum Torque Sensor to Reduce the Starting Current in the Induction Motor

*Muchlas and Hariyadi Soetedjo*..... 161

### Implementation of FPGA based PID Controller for DC Motor Speed Control System

*Savita Sonoli, Nagabhushan Raju Konduru*..... 170

Authors are encouraged to submit article in MS Word (doc) and Acrobat (pdf) formats by e-mail: editor@sensorsportal.com  
Please visit journal's webpage with preparation instructions: <http://www.sensorsportal.com/HTML/DIGEST/Submition.htm>

International Frequency Sensor Association (IFSA).


## Sensors & Transducers Journal (ISSN 1726-5479)

Open access, peer review  
international journal devoted to research,  
development and applications of sensors,  
transducers and sensor systems.  
The 2008 e-Impact Factor is 205.767

Published monthly by  
**International Frequency Sensor Association (IFSA)**



Submit your article online:  
<http://www.sensorsportal.com/HTML/DIGEST/Submition.htm>

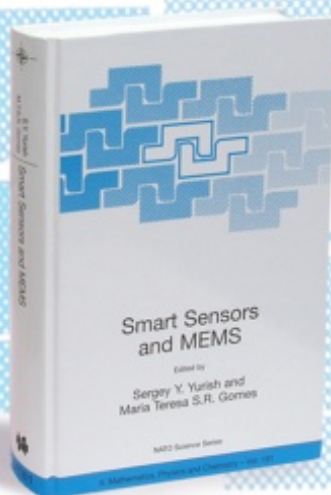

## Smart Sensors and MEMS

Edited by

Sergey Y. Yurish and  
Maria Teresa S.R. Gomes

The book provides an unique collection of contributions on latest achievements in sensors area and technologies that have made by eleven internationally recognized leading experts ...and gives an excellent opportunity to provide a systematic, in-depth treatment of the new and rapidly developing field of smart sensors and MEMS.

The volume is an excellent guide for practicing engineers, researchers and students interested in this crucial aspect of actual smart sensor design.



**Kluwer Academic Publishers**

Order online: [www.sensorsportal.com/HTML/BOOKSTORE/Smart\\_Sensors\\_and\\_MEMS.htm](http://www.sensorsportal.com/HTML/BOOKSTORE/Smart_Sensors_and_MEMS.htm)

## Use of the Maximum Torque Sensor to Reduce the Starting Current in the Induction Motor

<sup>1</sup>Muchlas and <sup>2\*</sup>Hariyadi SOETEDJO

<sup>1</sup>Department of Electrical Engineering, University of Ahmad Dahlan,  
Jalan Prof. Dr. Soepomo, Yogyakarta 55161, Indonesia

<sup>2</sup>CIRNOV (Center for Integrated Research and Innovation), University of Ahmad Dahlan,  
Jalan Cendana 9a, Semaki, Yogyakarta 55166, Indonesia

\*Tel.: +62-81 8468489, fax: +62-274-564604

E-mail: hariyadi@uad.ac.id

*Received: 19 December 2009 /Accepted: 22 March 2010 /Published: 29 March 2010*

---

**Abstract:** Use of the maximum torque sensor has been demonstrated able to improve the standard ramp-up technique in the induction motor circuit system. The induction motor used was of a three-phase *squirrel-cage motor* controlled using a microcontroller 68HC11. From the simulation done, it has been found that this innovative technique could optimize the performance of motor by introducing low stator current and low power consumption over the standard ramp-up technique. Copyright © 2010 IFSA.

**Keywords:** Standard ramp-up, Modified ramp-up, Starting current, Induction motor, Microcontroller

---

### 1. Introduction

An induction motor is considered an important component that is widely used in many electronic equipments such of automotives, machineries, and industries. The characteristics of that motor have introduced some superiorities of simple maintenance, low cost and more compact in dimension compare than that of DC motors. Based on the operational technique of motors, the classical technique called as a direct-on-line is usually used by applying voltage directly to the motors. This technique is considerably impractical for many electronic systems as the “voltage blink” will be produced in the power line during the operation that potentially able to disturb the electronic equipments. Therefore, any innovation techniques are expected in order able to solve that problem. Another common strategy used to reduce the starting current is by reducing the voltage of coil in a stator field using some


possible techniques of delta-star, autotransformer, and primary impedance. For this technique, the problem still arises when a relatively high starting current produced during the operation that will affect the drop voltages and lead the motor to break down [1, 2].

Beside the above techniques, another well-known technique called a ramp-up technique is also common used. This technique bases on the concept of providing the voltage gradually to the motor from 0 volt to the nominal value of a certain rate. This technique is different from the direct-on-line mentioned before that base on providing the voltage directly for a certain nominal value. The ramp-up technique has also been used for other applications in the integrated circuit (IC) devices [3]. In our research work, we have built-up a design of a control system to reduce the starting current as experienced in the ramp-up technique by a modification in its algorithm called a modified ramp-up technique. The basic concept of this technique has been done by providing the additional maximum torque detector in the electrical circuit to monitor the torque position. With this method, the system will always monitor the torque performance and control the voltage supply simultaneously based on the ramp-up voltage instead of the standard ramp-up used in a common system. The implementation of a power supply could be carried out through the control system of stator voltage using a thyristor circuit. For the investigation, the simulation has been carried out using Matlab software.

## 2. Theory, Design and Simulation

### 2.1. Starting Current Model of Induction Motor

It is noticeable that the ideal model of a three-phase of induction motor is complex, therefore the approximation model is required to simplify the analysis for a starting current produced during the motor operation. For the above problem, Dewan *et al.* [4] have proposed a model of a three-phase of induction motor (squirrel-cage type) as schematized in the equivalent circuitry given in Fig. 1.

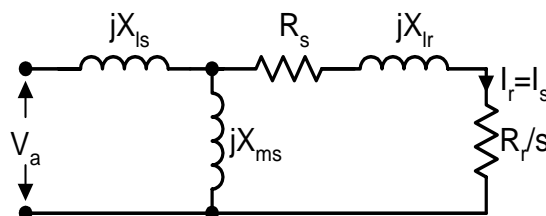

**Fig. 1.** An Approximation model for a three-phase of motor induction.

From that figure, parameters of a three-phase motor induction notated as  $X_{ms}$ ,  $X_{ls}$ ,  $X_{lr}$ ,  $R_s$ , and  $R_r$  are per-phase magnetizing reactance, per-phase stator leakage reactance, per-phase rotor leakage reactance, per-phase stator resistance, and per-phase rotor resistance, respectively. Notation  $S$  is a slip, defined as a ratio between actual and synchronous angular speed. Theoretically, the increase of motor speed leads to the decrease the slip. From that figure, notation  $V_a$  is voltage of phase a, meanwhile  $I_r$  and  $I_s$  are current flows in the circuit for rotor and stator, respectively. The model of that starting current was developed by Chattopadyay and Rao [5] that could be used to analyze the transient condition of an induction motor. That model could be implemented into a direct-on-line or a ramp-up technique. For that method, the model could be expressed as a differential equation given in Eq. 1. This equation will be solved using a simulation work by doing the integration function of the equation by referring to the Runge-Kutta method as this function is available in the software used.

$$\frac{p}{\omega_b} \bar{i} = \bar{X}^{-1} \bar{V} - \bar{X}^{-1} \bar{R} \bar{i} \quad (1)$$

where,  $p$  is a differential operator ( $= d/dt$ ),  $\omega_b$  is a base angular speed used to determine the motor parameters. Eq. 1 consists of a parameter of three-phase induction motor characteristics in the form of matrices and vectors, each parameter could be expressed as below.

$$\bar{X}^{-1} = \frac{1}{X_{ls}X_{lr} - X_{ms}^2} \begin{bmatrix} X_{lr} & 0 & -X_{ms} & 0 \\ 0 & X_{lr} & 0 & -X_{ms} \\ -X_{ms} & 0 & X_{ls} & 0 \\ 0 & -X_{ms} & 0 & X_{ls} \end{bmatrix} \quad (2)$$

$$\bar{V} = \begin{bmatrix} \frac{2}{3}(V_a - \frac{1}{2}V_b - \frac{1}{2}V_c) \\ \frac{1}{\sqrt{3}}(-V_b + V_c) \\ 0 \\ 0 \end{bmatrix} \quad (3)$$

From Eq. 3,  $V_a$ ,  $V_b$ , and  $V_c$  are voltages for each phase a, b, c, respectively from the power supply in a sinusoidal form that could be expressed as

$$V_a = V_m \sin \omega t \quad (4a)$$

$$V_b = V_m \sin(\omega t - \frac{2\pi}{3}) \quad (4b)$$

$$V_c = V_m \sin(\omega t + \frac{2\pi}{3}), \quad (4c)$$

where,  $V_m$  is a maximum voltage of supply.

Meanwhile, matrix construction,  $\bar{R}$  is

$$\bar{R} = \frac{1}{X_{ls}X_{lr} - X_{ms}^2} \begin{bmatrix} R_s & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 \\ 0 & -\frac{\omega_r}{\omega_b} X_{ms} & R_r' & -\frac{\omega_r}{\omega_b} X_{lr} \\ \frac{\omega_r}{\omega_b} X_{ms} & 0 & \frac{\omega_r}{\omega_b} X_{lr} & R_r' \end{bmatrix} \quad (5)$$

where,  $\omega_r$  is an angular frequency of rotor. Variable  $\bar{i}$  in Eq. 1 is a current vector which could be expressed as

$$\bar{i} = \begin{bmatrix} i_{qs} & i_{ds} & i_{qr} & i_{dr} \end{bmatrix}, \quad (6)$$

where,  $i_{qs}$ ,  $i_{ds}$ ,  $i_{qr}$  and  $i_{dr}$  are transient currents as a function of time in the model at d-q axis. Model of d-q axis is a transformation form of stator and voltage variables of reference for a stationer coordinate of



a three-phase to a reference of two coordinates (d and q) in the rotor. This transformation is used based on the theory of a two-axes introduced by Blondel *et al.* and Park [6]. In Eq. 6, subscripts s and r refer to the stator and rotor, respectively. From the above parameters, the electromagnetic torque,  $T_e$  could be found through a calculation using the equation below.

$$T_e = X_{ms} (i_{qs} i_{dr} - i_{ds} i_{qr}) \quad (7)$$

Once  $T_e$  could be obtained, the angular speed of motor rotation could be obtained using the following equation.

$$p \left( \frac{\omega_r}{\omega_b} \right) = \frac{T_e - T_L}{2H}, \quad (8)$$

where,  $H$  is an inertial constant of motor (unit in second), and  $T_L$  is a load torque.

## 2.2. A Standard Ramp-up Technique

By using a standard ramp-up technique, a starting current of motor could be reduced. The basic concept of a standard ramp-up technique as named by Nguyen and Ramaswamy [7] is well-known for motor inductions. Therefore, to produce low current at a starting-up condition, a supply voltage biased to the motor should be low. Meanwhile, to generate the electromagnetic torque required to rotate the rotor, the voltage bias is increased linearly and gradually. With this technique, the stator current is relatively low when the motor at a starting-up condition. Nevertheless, according to a ramp-up technique (without a feed-back component) as schematized in Fig. 2, due to the decrease of slip, this technique will increase the rotor resistance and produce low current. When the torque achieved a maximum value, the stator current will decrease to its nominal value. This technique is similar to the open loop control system where the ramp-up voltage is provided until a certain nominal value at a certain time (not the optimum time) achieved. In this work, the simulation will be done to the algorithm of this technique (based on Eq. 4) with a modification in the maximum torque sensor in order the input voltage could increase gradually.


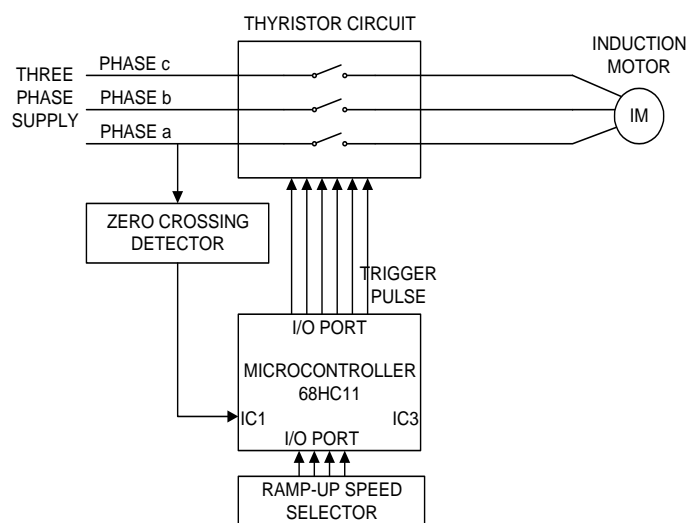


Fig. 2. A schematic diagram of standard ramp-up technique.


### 2.3. A Modified Ramp-up Technique

By referring to the standard ramp-up technique mentioned before, the starting current produced by the motor will decrease from around 6 to 2.5 times of the nominal value. Unfortunately, the power supply does not achieve a nominal value while the torque was at a maximum position. This condition could affect the stall when the start-up time is occurred for any longer. Therefore, to overcome that problem, a modified standard ramp-up has been designed in this work in order the system could be monitored continuously. This method was carried out by providing the maximum torque detector in the circuitry as a feedback element as this is usually done in the closed loop control system. Initially, the voltage bias was increased to the motor (this method is commonly done in the standard technique) while monitoring the performance of torque. When the torque achieved a maximum position, then the voltage is increased at a nominal value. To generate the ramp-up voltage while monitoring the performance of torque, we used a thyristor circuit to control the voltage bias. For this technique, the signal generator and torque were controlled using a microcontroller. The design of a modified ramp-up system is schematized in Fig. 3. From that figure, the maximum torque detector of a thyristor component is added to the circuitry connected to the induction motor and a microcontroller. Meanwhile, the procedure to control the motor is given in the flow chart as shown in Fig. 4. As we can see from that figure, after the torque is set at a maximum angle through the circuitry command, then the circuitry shifts the pulse at a lower angle, meanwhile the detector is being monitored continuously. When the torque achieved at a maximum position then setting the pulse at a minimum angle otherwise shifting the pulse to the lower angle. This method will allow the circuitry always adjust the torque until achieved a maximum value before setting the pulse at a minimum angle.

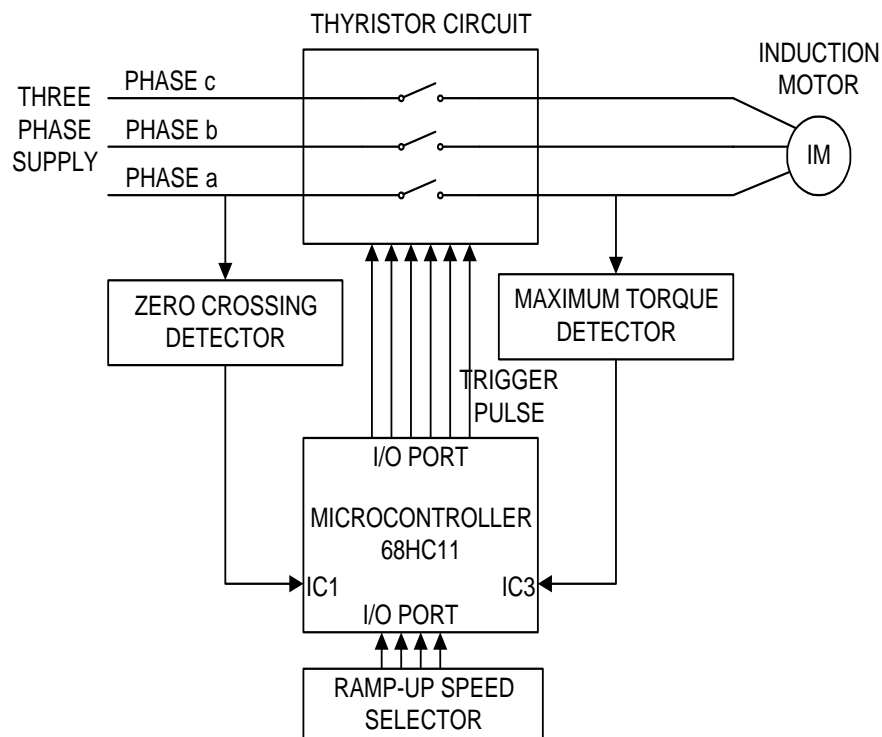

**Fig. 3.** A schematic diagram of modified ramp-up technique used by connecting the maximum torque detector.

For the simulation, the parameters of  $\omega_b$ , torque and speed of motor as a function of time will be given their values through a calculation by referring to Eq. (1), (7) and (8), respectively. The results obtained from the simulation work will be compared to that of the standard ramp-up technique.

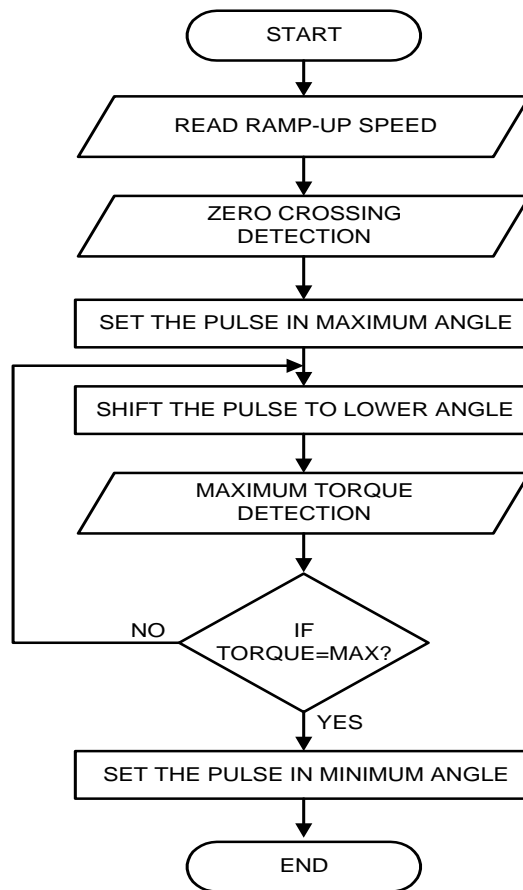


**Fig. 4.** A flow chart of motor induction control based a modified ramp-up technique.


### 3. Results and Discussion

Simulation has been done to investigate the motor characteristics using standard and modified ramp-up techniques and compare their results. From the results, the characteristic of induction motor based on a standard ramp-up technique has been obtained as shown in Fig. 5. This figure shows the pattern of stator current, torque and speed characteristics of induction motor as indicated by the arrows. From those results, it was found that for a standard ramp-up technique, the stator current increased linearly by the increasing time as the torque also increases until achieves a maximum value at 1 second. At this condition the speed of motor increased but has not achieved yet the maximum and then reaches a stable condition. The stable condition was achieved starting at 1.4 seconds. As we can see in Fig. 5, the pattern of stator current shows a decrease after achieved a maximum magnitude and then start again to increase slowly with a tale for a longer time tend to stable.

Meanwhile, for the modified technique, this characteristic has been obtained as given in Fig. 6. From that figure, the pattern of stator current (after achieved a maximum value at 1 second) decreases and immediately going to stable condition as this phenomenon can not be observed through a standard ramp-up technique. This immediate stability will be a very interesting point of the method for the ability to improve the optimum performance of motor.

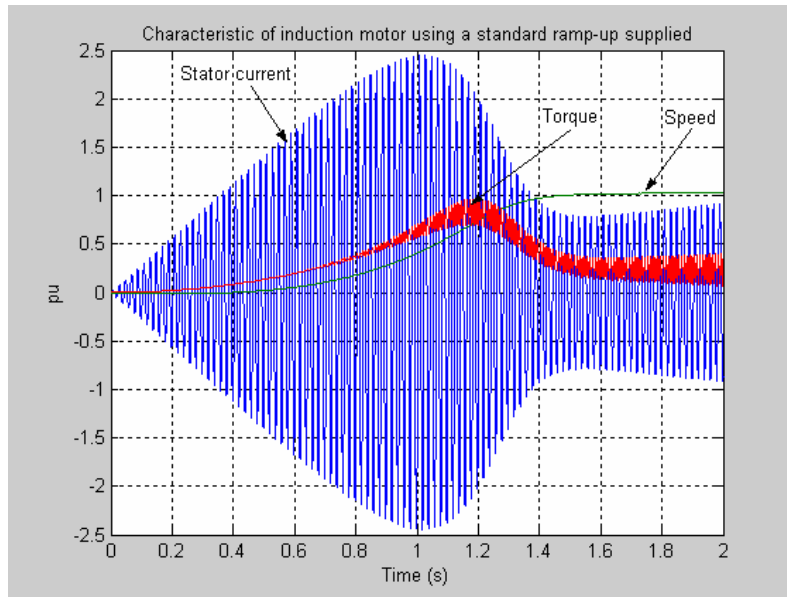


**Fig. 5.** Characteristics of the induction motor using a standard ramp-up supplied.

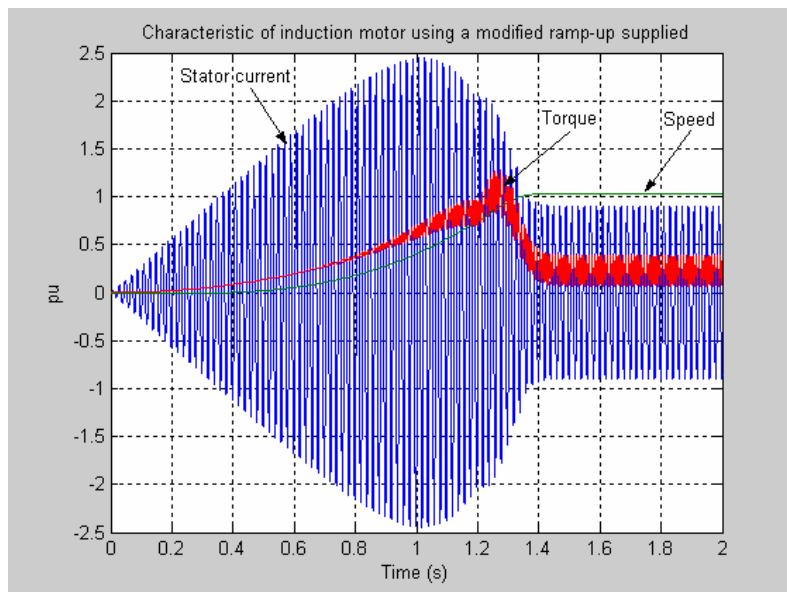


**Fig. 6.** Characteristics of the induction motor using a modified ramp-up supplied.

From the simulation, it has been found that the variation of supply voltages as a function of time (as we can see for a standard ramp-up technique in Fig. 7a), the pattern of voltage tends to increase its magnitude from the initial voltage without a certain stable condition at 2 seconds. This phenomenon could affect disadvantageous of more power consumption required. But for a modified ramp-up technique as shown in Fig. 7b, the voltage pattern shows to increase linearly and then a bit sudden increase (for about 1.5 seconds) before achieved a stable value. This different characteristic for the modified technique affects to more quick to have a stable condition of motor performance and this phenomenon will introduce the effective power supplied. With this technique, the motor could avoid the stall for a longer starting time.

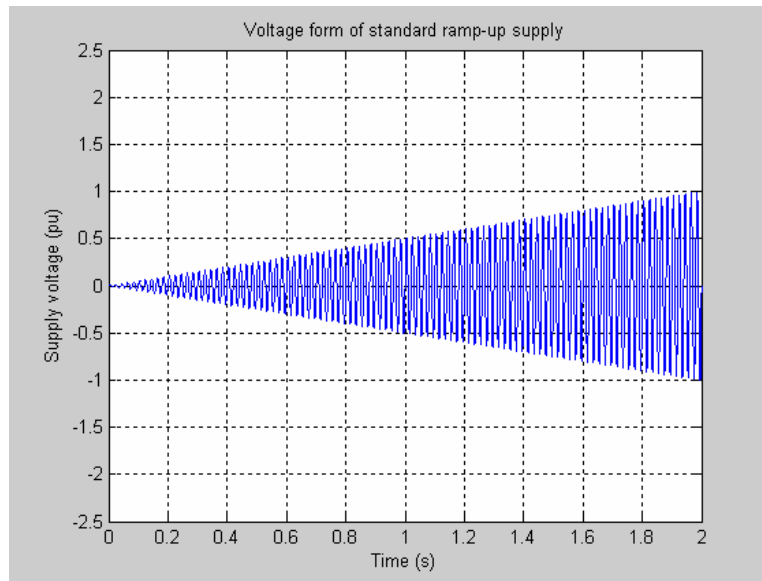

**Fig. 7a.** Voltage forms of a standard ramp-up.

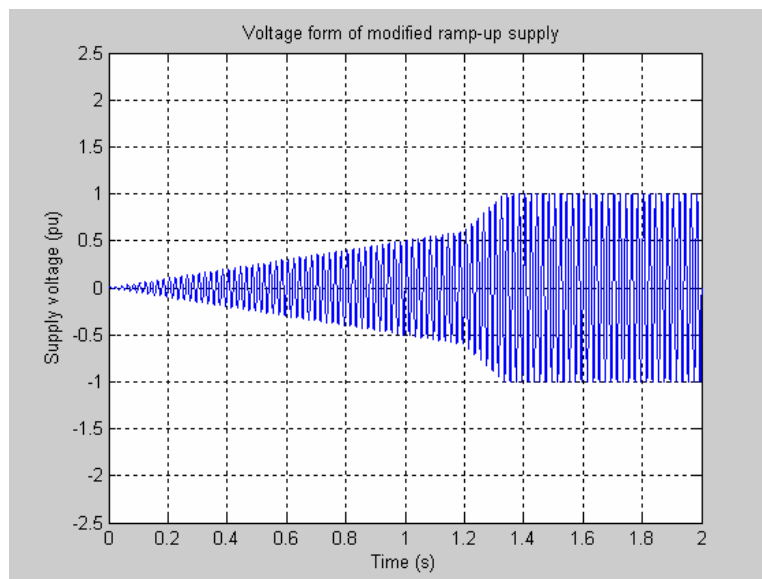

**Fig. 7b.** Voltage forms of a modified ramp-up supplied.

## 5. Conclusions

From the simulation done to both techniques, it was found that using a modified ramp-up technique, the voltage achieved a stable nominal value was relatively faster compare than that of the standard ramp-up technique beside the starting current was found to be lower. For a motor speed, the modified technique introduced a faster time to achieve a stable condition. These advantages lead to a better characteristic for induction motors, relatively longer time performance as the start-up current was controllable to more precisely. With some of these advantages, the modified ramp-up technique is encouraging for an implementation to the real motor circuitry based on the simulation work.

## References

- [1]. G. M. Pherson, R. D. Laramore, An Introduction Electrical Machines and Transformers, *John Wiley & Sons, Inc.*, New York, 1990.
- [2]. N. Mohan, T. M. Undeland, W. P. Robbins, Power Electronics: Converters, Applications and Design, *John Wiley & Sons, Inc.*, New York, 1995.
- [3]. C. Burmer, S. Görlich, Failure analyses for debug and ramp-up of modern IC's, *Microelectronics Reliability*, Vol. 46, 2006, pp. 1486 – 1497.
- [4]. S. B. Dewan, G. R.. Slemon, A. Straughen, Power Semiconductor Drives, *John Wiley & Sons, Inc.*, New York, 1984.
- [5]. A. K. Chattopadhyay, T. J. Rao, A Generalized Method of Computer Simulation for Induction Motors with Stator Current Discontinuities and its Application to a Cycloconverter-Fed Drive, *IEEE Transactions on Industry Application*, Vol. 1A-16, 2, 1980, pp. 234-241.
- [6]. P. J. Otaduy, J. W. McKeever, Modeling Reluctance-assisted PM Motors, *Report Prepared by the Oak Ridge National Laboratory*, Oak Ridge, Tennessee 37831 managed by UT-BATTELLE, LLC for the U. S. Department of Energy under contract DE-AC05-000R22725, 2006:  
<http://www.ornl.gov/~webworks/cppr/y2001/rpt/123193.pdf>
- [7]. H. T. Nguyen, V. Ramswamy, Induction Motor Starter Instability, *Conference on Industrial Drives*, 18-20 September 1991, University of Central Queensland, Rockhampton, 1991.

---

2010 Copyright ©, International Frequency Sensor Association (IFSA). All rights reserved.  
(<http://www.sensorsportal.com>)

## Sensors & Transducers Journal 2009 on CD



**205.767**  
2008 e-Impact Factor

ISSN 1726-5479

---

12 Issues, 100-111 Volumes  
+ 3 Special Issues

Order online:

[http://www.sensorsportal.com/HTML/DIGEST/Journal\\_CD\\_2009.htm](http://www.sensorsportal.com/HTML/DIGEST/Journal_CD_2009.htm)

## Guide for Contributors

---

### Aims and Scope

*Sensors & Transducers Journal* (ISSN 1726-5479) provides an advanced forum for the science and technology of physical, chemical sensors and biosensors. It publishes state-of-the-art reviews, regular research and application specific papers, short notes, letters to Editor and sensors related books reviews as well as academic, practical and commercial information of interest to its readership. Because it is an open access, peer review international journal, papers rapidly published in *Sensors & Transducers Journal* will receive a very high publicity. The journal is published monthly as twelve issues per annual by International Frequency Association (IFSA). In addition, some special sponsored and conference issues published annually. *Sensors & Transducers Journal* is indexed and abstracted very quickly by Chemical Abstracts, IndexCopernicus Journals Master List, Open J-Gate, Google Scholar, etc.

### Topics Covered

Contributions are invited on all aspects of research, development and application of the science and technology of sensors, transducers and sensor instrumentations. Topics include, but are not restricted to:

- Physical, chemical and biosensors;
- Digital, frequency, period, duty-cycle, time interval, PWM, pulse number output sensors and transducers;
- Theory, principles, effects, design, standardization and modeling;
- Smart sensors and systems;
- Sensor instrumentation;
- Virtual instruments;
- Sensors interfaces, buses and networks;
- Signal processing;
- Frequency (period, duty-cycle)-to-digital converters, ADC;
- Technologies and materials;
- Nanosensors;
- Microsystems;
- Applications.

### Submission of papers


Articles should be written in English. Authors are invited to submit by e-mail [editor@sensorsportal.com](mailto:editor@sensorsportal.com) 8-14 pages article (including abstract, illustrations (color or grayscale), photos and references) in both: MS Word (doc) and Acrobat (pdf) formats. Detailed preparation instructions, paper example and template of manuscript are available from the journal's webpage: <http://www.sensorsportal.com/HTML/DIGEST/Submission.htm> Authors must follow the instructions strictly when submitting their manuscripts.

### Advertising Information

Advertising orders and enquires may be sent to [sales@sensorsportal.com](mailto:sales@sensorsportal.com) Please download also our media kit: [http://www.sensorsportal.com/DOWNLOADS/Media\\_Kit\\_2009.pdf](http://www.sensorsportal.com/DOWNLOADS/Media_Kit_2009.pdf)

 **WILEY**  
1807-2007

KNOWLEDGE FOR GENERATIONS

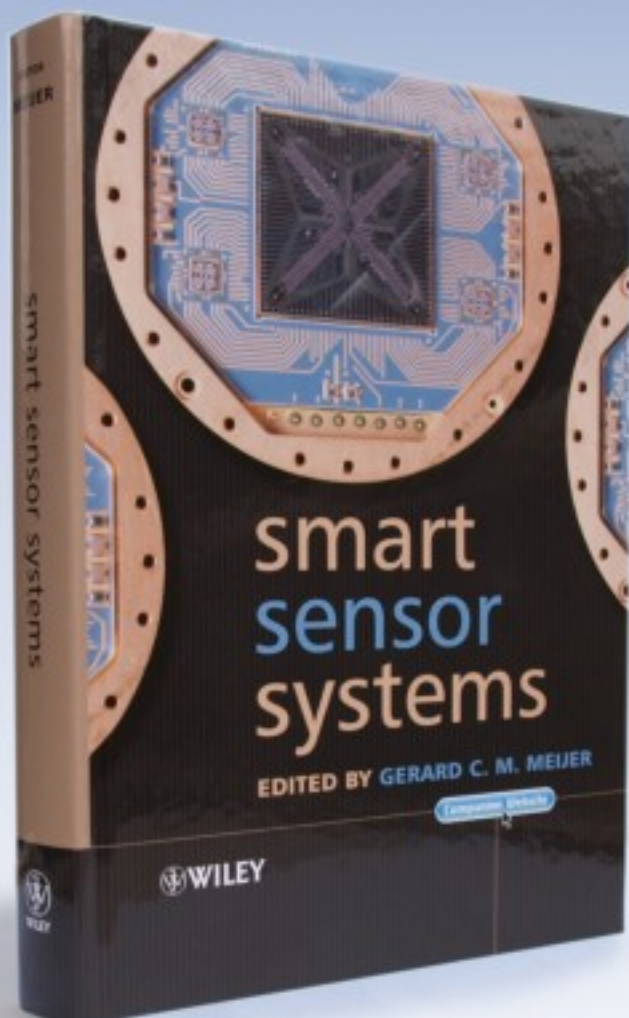

**'Written by an internationally-recognized team of experts, this book reviews recent developments in the field of smart sensors systems, providing complete coverage of all important systems aspects. It takes a multidisciplinary approach to the understanding, design and use of smart sensor systems, their building blocks and methods of signal processing.'**



**Order online:**

[http://www.sensorsportal.com/HTML/BOOKSTORE/Smart\\_Sensor\\_Systems.htm](http://www.sensorsportal.com/HTML/BOOKSTORE/Smart_Sensor_Systems.htm)

**[www.sensorsportal.com](http://www.sensorsportal.com)**