

978-1-7281-2930-3



PROCEEDINGS



1st International Conference

ICIMCIS

Informatics, Multimedia, Cyber and Information System

FAKULTAS ILMU KOMPUTER

UNIVERSITAS PEMBANGUNAN NASIONAL VETERAN JAKARTA

978-1-7281-2930-3

ICIMCIS PROCEEDINGS

Fakultas Ilmu Komputer
Universitas Pembangunan Nasional Veteran Jakarta
Jl. RS. Fatmawati, No.1, Pondok Labu
Jakarta Selatan , DKI Jakarta



2019 International Conference on Informatics, Multimedia, Cyber and Information System (ICIMCIS) took place October 24-25, 2018 in Jakarta, Indonesia.

ISBN : 978-1-7281-2930-3 (ART) / 978-1-7281-2929-7 (USB)

Copyright and Reprint Permission: Abstracting is permitted with credit to the source. Libraries are permitted to photocopy beyond the limit of U.S. copyright law for private use of patrons those articles in this volume that carry a code at the bottom of the first page, provided the per-copy fee indicated in the code is paid through Copyright Clearance Center, 222 Rosewood Drive, Danvers, MA 01923. For other copying, reprint or republication permission, write to IEEE Copyrights Manager, IEEE Operations Center, 445 Hoes Lane, Piscataway, NJ 08854. All rights reserved. Copyright © 2019 by IEEE.

Recognizing Human Emotion patterns by applying Fast Fourier Transform based on Brainwave Features

Anton Yudhana

Department of Electrical Engineering
Universitas Ahmad Dahlan
Yogyakarta, Indonesia
eyudhana@ee.uad.ac.id

Subhas Mukhopadhyay

Mechanical / Electronic Engineering
Macquaire University
NSW, Australia
subhas.mukhopadhyay@mq.edu.au

Ismail Rakip Karas

Computer Engineering Department
Karabük University
Karabük, Turkey
ismail.karas@karabuk.edu.tr

Ahmad Azhari

Informatics Department
Universitas Ahmad Dahlan
Yogyakarta, Indonesia
ahmad.azhari@tif.uad.ac.id

Murein Miksa Mardhia

Informatics Department
Universitas Ahmad Dahlan
Yogyakarta, Indonesia
murein.miksa@tif.uad.ac.id

Son Ali Akbar

Electrical Engineering Department
Universitas Ahmad Dahlan
Yogyakarta, Indonesia
sonali@ee.uad.ac.id

Akbar Muslim

Electrical Engineering Department
Universitas Ahmad Dahlan
Yogyakarta, Indonesia
akbar1500022007@webmail.uad.ac.id

Fathia Irbati Ammatulloh

Informatics Department
Universitas Ahmad Dahlan
Yogyakarta, Indonesia
fathia1500018205@webmail.uad.ac.id

Abstract— The natural ability of humans to receive messages from the surrounding environment can be obtained through the senses. The senses will respond to stimuli received in various conditions including emotional conditions. Psychologically, recognizing human emotions directly can be assessed from several criteria, such as facial expressions, sounds, or body movements. This research aims to analyze human emotions from the biomedical side through brainwave signals using EEG sensors. The EEG signal obtained will be extracted using Fast Fourier Transform and first-order statistical features. Monitoring of EEG Signals is obtained by grouping based on four emotional conditions (normal, focus, sadness and shock emotions). The results of this research are expected to help improve users in knowing their mental state accurately. The development of this kind of emotional analysis has the potential to create wide applications in the future environment. Research results have shown and compared frequency stimuli from normal emotions, sadness, focus and shock in a variety of situations.

Keywords—Emotion, Electroencephalography (EEG), Fast Fourier Transform (FFT), Brainwave

I. INTRODUCTION

Humans have the natural ability to use all their senses in receiving messages in a conscious state. Through these senses, humans can feel emotional states when they get a stimulus [1][2]. Recognizing human emotions directly can be assessed from several criteria, such as facial expressions [3], sounds [4], or body movements [5][6]. Other criteria for identifying human emotions can also be based on data recorded on human brain activity, better known as Electroencephalography (EEG) [7].

EEG is a tool used to view electrical activity in the human brain. EEG signal change turns into a model and by examining it gives a successful method to group the EEG signal. In general, EEG signal comprises of wave parts, separated by their frequency domain such as Delta (0.1-4Hz),

Theta (4-8Hz), Alpha(8-13Hz), Beta(13-30Hz) and Gamma (40-80Hz) [8][15][16][17]. Table 1 displays the oscillation frequency of brainwave signals.

TABLE I. BRAINWAVE OSCILLATIONS BASED ON NEUROSKY

Brainwave Type	Frequency range	Mental states and conditions
Delta	0.1 – 3 Hz	Deep, dreamless sleep, non-REM sleep, unconscious
Theta	4 – 7 Hz	Intuitive, creative, recall, fantasy, imaginary, dream
Alpha	8 – 12 Hz	Relaxed, but not drowsy, tranquil, conscious
Low Beta	12 – 15 Hz	Relaxed yet focused, integrated
Midrange Beta	16 – 20 Hz	Thinking, aware of self & surroundings
High Beta	21 – 30 Hz	Alertness, agitation
Gamma	30 – 100 Hz	Motor Functions, higher mental activity

In this study, we will use Neurosky Mindwave Mobile which is equipped with a sensor on the forehead and noise filter in the form of an ear clip mounted on the left ear to observe and record brainwaves [9]. Mindwave measures the voltage between sensors placed on the forehead and sensors that clamp the left ear (ear clip) as *ground*. More precisely, the position on the forehead is Fp1, as determined by the International System. Besides, this tool already has Noise Cancellation Technologies that can eliminate noise frequencies from other sources such as muscle movements and electrical devices. This filter removes electrical interference that varies from 50 Hz to 60 Hz depending on geographical location [10].

The type of the EEG output is in the way of electrical signals in the brain in the form of a graph with brainwave voltage on the time or frequency that can be seen using a computer [11]. Brainwave graphs on EEG vary depending on the condition of the human brain at the time of recording. It

can be influenced by the presence of internal stimuli when experiencing an emotion (sad, surprised and thinking/focus) [12].

In this study, the spectrum analysis method based on Fast Fourier Transform (FFT) used in characterizing EEG output brainwaves is used to analyse the existence of brainwave differences between emotions and standard in a person [13].

II. RESEARCH METHODS

A. Neurosky Mindwave Mobile

This study applied four versions of EEG sensor: the NeuroSky MindSet headset, NeuroSky MindBand, NeuroSky MindWave headset, and NeuroSky MindWave Mobile headset. Mindwave version measures the voltage between the sensor placed on the forehead and the sensor that clips the left ear (ear clip) as *ground* [14]. More precisely, the position on the forehead is Fp1, as determined by the International System. The ThinkGear is the EEG technology within each NeuroSky products that safely measure and generate the EEG power spectrum. Both the eSense™ Meters (attention and meditation) and raw brainwaves are calculated on the ThinkGear Chip [15].

B. Stimulus

Before starting the experiment, preparation time is needed to install the Neurosky Mindwave and adjust the position of the subject to be comfortable during activities, the processing time is unpredictable because it depends on how long the subject takes to complete a stimulus[16]. A psychologist gives justification to validate the stimulus used in this study: listening to songs, watching videos or reading books. The stimulus serves to find out whether the subject of emotion is when he is given a song, video or work [17].

C. Fast Fourier Transform

The Fast Fourier Transform method requires around 10,000 mathematical algorithm operations for data with 1000 observations, 100 times faster than the previous method. The discovery of Fast Fourier Transform and the development of personal computers, the Fast Fourier Transform technique in the data analysis process became popular and is one of the standard methods in data analysis. One form of transformation commonly used to convert signals from the time domain to the frequency domain is the Fourier transform [18].

Correlation is a term commonly used to describe whether or not there is a relationship with something else [19][20]. In simple terms, that is precisely what understanding correlation means. Correlation analysis is a method or method to determine whether or not there is a linear relationship between variables. If there is a relationship, the changes that occur in one of the variables X will result in a difference in the other variable (Y). The term is said to be a causal term, and the term is a characteristic of correlation analysis — the Fast Fourier Transform algorithm equation in equation (1).

$$f_j = \sum_{k=0}^{N-1} w_N^{kj} f_k \quad (1)$$

Suppose that N can be divided into two so that the equation below divided into two parts, namely for even k and odd k. Then given a new variable with equation (2):

$$M = \frac{N}{2} \quad (2)$$

So that equation (3) is obtained:

$$f_j = \sum_{k=0}^{M-1} w_N^{2kj} f_{2k} + \sum_{k=0}^{M-1} w_N^{(2k+1)j} f_{2k+1} \quad (3)$$

Where N is the amount of data, then equation (4) is what is known as FFT:

$$M = \frac{N}{2} M = \frac{N}{2}; w_N = e^{-\frac{2\pi i}{N}}; w_M = e^{-\frac{2\pi i}{M}}; k, j = 0, 1, \dots, N-1. \quad (4)$$

The above equation is used to find *sine* and *cosine* correlation on Fast Fourier Transform. A correlation that occurs between two variables is not always in the form of an addition to the value of variable Y if the variable X increases, a correlation like this is called a positive correlation. Sometimes it is found that there is a relationship where if one of the variable values increases the other variable decreases, a relationship like this is called a negative correlation. Not only positive and negative correlations, but also sometimes found cases where the relationship between variables is fragile, and even no correlation founded.

D. Research Tools and Materials

The main tools and materials used, and their functions can be seen in Table 2.

TABLE II. RESEARCH TOOLS AND MATERIALS

Research Tools and Materials	
Tools and Materials	Information
Personal Computer	To design and simulate the MATLAB program using the FFT method
EEG Neurosky Mindwave	Brain ware recording
Bluetooth Adapter	As a device to connect Neurosky Mindwave with a Laptop
Stimulus	Used to get the brainwave parameters of each subject
MATLAB	Used for brainwave feature extraction using the FFT method.

E. Block Diagram

To simplify the process of making the script, this time, the research needs to make systematic steps. The existence of levels in this study is expected to guide in formulating research problems. The design flow can be seen in Figures 1 and 2.

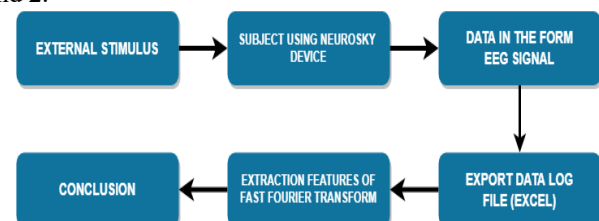


Fig. 1. System Design Block Diagram

The subject will be given a stimulus in the form of music, video and books with Neurosky placed on the head to record the EEG signal. The signal then will get pre-processed to generate the average signal and erase the baseline to get the signal output. The results were then analyzed using Fast Fourier Transform to obtain a noise-free EEG signal to extract all essential frequency components from EEG signals of alpha, beta, gamma, delta, and theta. Separation of the frequency of the wave part of the EEG signal for grouping the features of a subject's brainwaves that will carry out tests based on certain level signals. Fast Fourier Transform is used for gathering and detecting brainwaves which provides different features. The results of the selection of prominent EEG signals from brainwave signals in identifying features result in the identification of data classification.



Fig. 2. Hardware Design Block Diagram

The block diagram above, it can be seen that Bluetooth adapters function as communication protocols between laptops with Neurosky Mindwave. The data sent is in the form of brainwave record values measured using Neurosky Mindwave and will be posted periodically according to how long the recording process is.

F. System Testing

In this study, the subject will be given a stimulus in the form of listening to music, watching a video or reading a book while using the *Neurosky* sensor so that an EEG signal is obtained.



Fig. 3. Illustration of System Testing

The results of the EEG signal pre-processing were generated using Fast Fourier Transform (FFT) to obtain a noise-free EEG signal to extract all essential frequency components such as alpha, beta, gamma, delta, and theta. Separation of the frequency of the wave part of the EEG signal for grouping the features of a subject's brainwaves that will carry out tests based on certain level signals. Fast Fourier Transform is used for gathering and detecting brainwaves where these brainwaves provide different features. The results of the selection of prominent EEG signals from brainwave signals in identifying features result in the identification of data classification.

III. RESULT AND DISCUSSION

In this study, the test results will be divided into several stages. The first stage is testing brainwave conversion from RAW data into a Fast Fourier Transform (FFT) spectrum. Second is testing for brainwave analysis when under normal circumstances and in certain emotions using FFT.

A. Converting RAW data into FFT on Brainwave Recordings

The process of converting raw data into FFT is done by using the Matlab software where the data input is RAW data output from Neurosky. For the results that have been running in the form of Neurosky amplitude waves and FFT frequency waves. The results obtained from running the program will be shown in Figures 4 (a) and 4 (b) below.

(a)

(b)

Fig. 4. The result of running the program conversion from the RAW signal (a) to the FFT spectrum (b)

From the picture above shows the difference between Neurosky data in the form of RAW data from the subject and the Fast Fourier Transform signal spectrum from a subject data. The result of running the program is that there are two forms of signals, namely Neurosky wave signals in the form of a neurosky amplitude and wave in the form of frequency, while in figure 5 (a), raw signal is raw data obtained from Neurosky waves that are tested on subjects that are thinking complicated things and can see a high amplitude from 0 to 1×10^5 . Figure 5 (b) shows a Neurosky wave frequency signal spectrum which was tested on subjects in a state of thinking about complicated things. There are frequencies of 0 to 50 Hz which have different amounts at each frequency. The results of the signal spectrum will be different for each stimulus given to the subject.

B. FFT Spectrum Analysis of Individual Regular Brainwaves and Emotions

FFT spectrum analysis process is carried out between regular and specific emotional waves. The picture below explains the results of running programs for subjects with the FFT method in figure 5, 6, and 7.

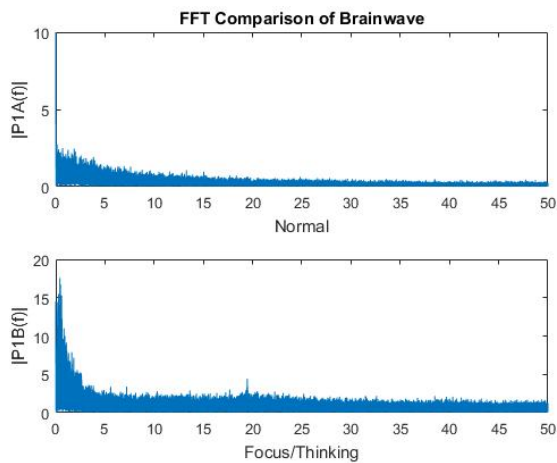


Fig. 5. FFT Result when Normal and Focused (Thinking)

It can be seen that the first subject brainwave has a difference where at regular times it has the highest amplitude of 2.86 at a frequency of 0 - 50Hz, while at a time of focus/thinking has the highest amplitude of 17.57 at a frequency of 0 - 50Hz.

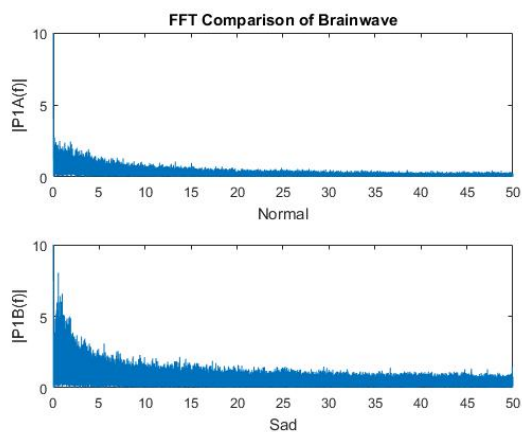


Fig. 6. FFT Result when Normal and Sad

The second subject's brainwaves have differences were at regular times they have the highest amplitude of 2.86 at a frequency of 0 - 50Hz, while at a time of sad have the highest amplitude of 8.04 at a frequency of 0 - 50 Hz.

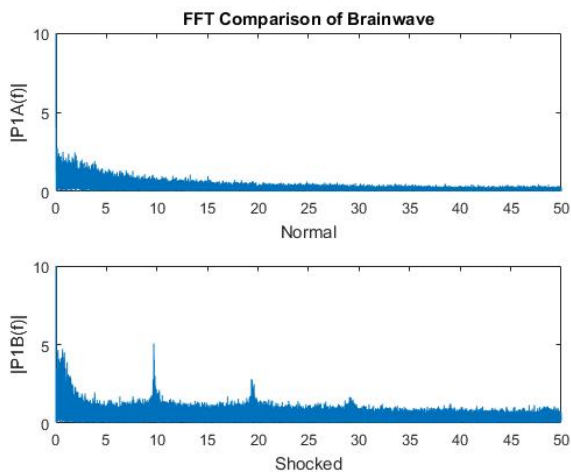


Fig. 7. FFT Result when Normal and Shocked

It can be seen that the second subject's brainwaves have differences were at regular times they have the highest amplitude of 2.86 at a frequency of 0 - 50Hz, while at a time of shock have the highest amplitude of 6.27 at a frequency of 0Hz.

From the results of the comparison of three subjects when the state of focus, sad, and shocked, can be seen the results of the FFT spectrum between the three there are differences where at the time of focus state has a higher amplitude value than when the state of sad and shocked. But in a state of shock, there are several amplitude surges in the frequency range 0-5Hz, 9-10Hz, 19-20Hz and 29-30Hz.

C. The Results of the Comparison of the amount data in each emotion

The highest amount of data is collected from each frequency to compare the values obtained from each emotion, and the process is carried out in MATLAB to retrieve the most top data from 0 - 4Hz with a range of 0.25Hz. The results obtained can be seen in Figure 8, Figure 9, Figure 10, and Figure 11.

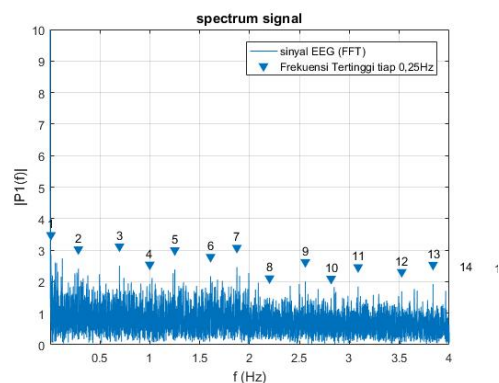


Fig. 8. Signal spectrum of "normal" emotions

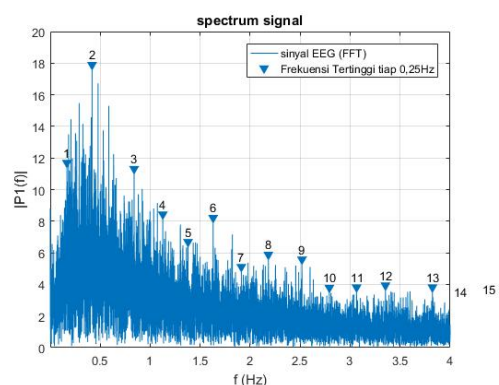


Fig. 9. Signal spectrum of "focused" emotions

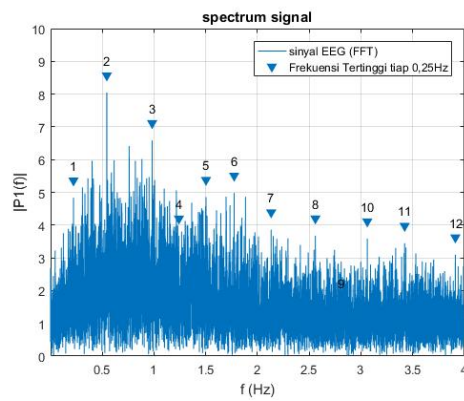


Fig. 10. Signal spectrum of "sad" emotions

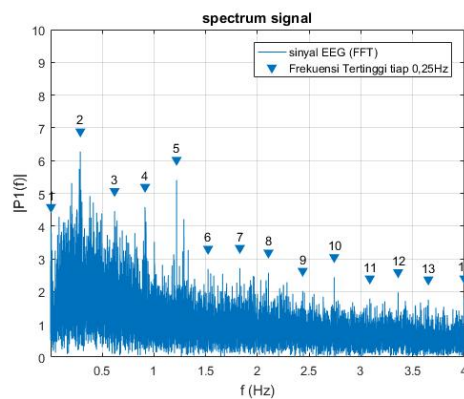


Fig. 11. Signal spectrum of "shocked" emotions

In figure 8, 12 different data obtained in each frequency from 0 - 4Hz with a range of 0.25Hz, emotional graph output is very different starting from the highest that is Focus, Sad, Shocked and the lowest is normal. This is based on an analysis obtained from psychology where the effect on interference and pressure makes the brain performance higher so that the correlation of brainwaves to the subject with the stimulus will be in line. Then proceed to take the value of each frequency contained in Table 3.

TABLE III. THE MAXIMUM PEAK OF ALL TYPES OF EMOTIONS BASED ON SPECTRUM SIGNALS

No	Emotion Types (Hz)			
	Normal	Focused	Sad	Shocked
1	2.8665	11.3798	4.8353	3.9660
2	2.4131	17.5746	8.0422	6.2746
3	2.5042	10.9925	6.5860	4.4555
4	1.9288	8.1166	3.6707	4.5811
5	2.3847	6.3706	4.8527	5.4052
6	2.1723	7.8941	4.9804	2.6893
7	2.4603	4.7945	3.8608	2.7143
8	1.4927	5.5629	3.6754	2.5726
9	2.0089	5.2621	1.2591	2.0168
10	1.4789	3.4735	3.5842	2.4372
11	1.8456	3.4978	3.4489	1.7841
12	1.6929	3.621	3.0951	1.9765
Average	2.1041	7.3783	4.3242	3.4061

By looking on the table 2, the results obtained from the values of each frequency from 0-4Hz with a range of 0.25Hz and obtained 12 data from each brainwave that has been processed using FFT, then the results of the table are compared in the form of a line chart in Figure 9.

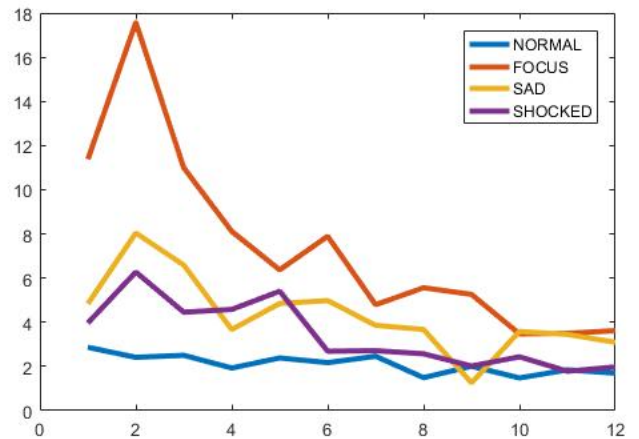


Fig. 12. Result Comparison of All Types of Emotional Frequencies

The results of the comparison of brainwaves in table 3 made into the form of a line chart in Figure 12 seen a significant difference between each brainwave that has been processed from raw data into FFT where there is a difference in correlation between each emotion with the average value the highest meanings are in Emotion Focus (7.3783), Sad (4.3242), Shocked (3.4061), Normal (2,104).

Table 4 shows the extraction results based on statistical features of the maximum peak signal. Based on the characteristics obtained, it can be seen that the type of emotion that is very dominant in providing the stimulus provided is focus. Focus gives 88.54 (43%) of other emotions, namely sad with 25%, shocked 20%, and normal 12%.

TABLE IV. BRAINWAVE STATISTICS FEATURE

Features	Emotional Types			
	Normal	Focused	Sad	Shocked
Mean	2,1041	7,3783	4,3242	3,4061
Standard Error	0,1258	1,2115	0,5015	0,4286
Median	2,0906	5,9668	3,7681	2,7018
Standard Deviation	0,4356	4,1967	1,7371	1,4848
Sample Variance	0,1898	17,6126	3,0175	2,2046
Kurtosis	-0,8763	2,0476	1,3216	-0,6754
Skewness	0,0508	1,4273	0,6482	0,7494
Range	1,3876	14,1011	6,7831	4,4905
Minimum	1,4789	3,4735	1,2591	1,7841
Maximum	2,8665	17,5746	8,0422	6,2746
Sum	25,2489 (12%)	88,54 (43%)	51,8908 (25%)	40,8732 (20%)

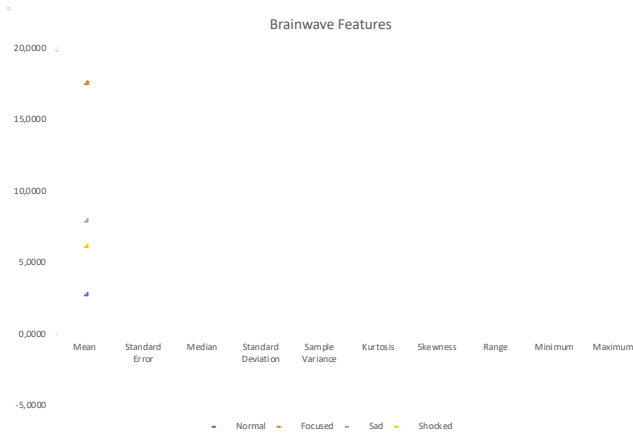


Fig. 13. Statistical features of the maximum peak brainwave signals

From Figure 13 it can be seen that the results of the focus emotions graph are above that of other emotional graphs. This shows a good mental state. The use of stimulation is very influential in determining this mental state. Things to note are sad emotions that have a relatively high yield after focused emotions. Regulations on sad emotions are needed to help improve productivity and mental health conditions.

IV. CONCLUSION

Based on the results, it showed that each subject has its brainwave pattern based on the stimulus given, so that the subject is in a particular emotional state. While it can be seen the shape and value of the brainwave frequency spectrum using Fast Fourier Transform from each recorded brainwave. From the results of the comparison of the average for each emotion there is still a slight difference between normal and shocked emotions compared to focus and sad, therefore still needed to take more brainwave data records and expand its scope as reviewed in terms of age, gender, and others so that the results of the shape or value of the FFT spectrum can be more accurate and detailed.

ACKNOWLEDGMENT

This research was fully supported by PDUPT Research Grant Program from The Ministry of Research and Higher Education of Indonesia in academic year 2018/2019 within the contract number of PDUPT-019/SKPP.TJ/LPPM UAD/III/2019.

REFERENCES

- [1] R. Das, E. Maiorana and P. Campisi, "EEG Biometrics Using Visual Stimuli: A Longitudinal Study," in *IEEE Signal Processing Letters*, vol. 23, no. 3, pp. 341-345, March 2016.
- [2] Yudhana, Anton & Riadi, Imam & Ridho, Faizin. (2018). DDoS Classification Using Neural Network and Naïve Bayes Methods for Network Forensics. *International Journal of Advanced Computer Science and Applications*. 9. 177-183. 10.14569/IJACSA.2018.091125.
- [3] M. Soleymani, S. Asghari-Esfeden, Y. Fu and M. Pantic, "Analysis of EEG Signals and Facial Expressions for Continuous Emotion Detection," in *IEEE Transactions on Affective Computing*, vol. 7, no. 1, pp. 17-28, 1 Jan.-March 2016.
- [4] Bhattacharya, J., Lee, E.J. "Modulation of EEG Theta Band Signal Complexity by Music Therapy," in *International Journal of Bifurcation and Chaos*, Vol.26, No.1, 2016.
- [5] Yudhana, A & Rahmawan, J & Negara, C. (2018). Flex sensors and MPU6050 sensors responses on smart glove for sign language translation. *IOP Conference Series: Materials Science and Engineering*. 403. 012032. 10.1088/1757-899X/403/1/012032.
- [6] Hyungwoo Park, Sangwoo Hahm, "Changes in Stress Mindset and EEG through E-Healthcare Based Education", *Access IEEE*, vol. 7, pp. 20163-20171, 2019..
- [7] N. Yıldırım and A. Varol, "A research on estimation of emotion using EEG signals and brain computer interfaces," 2017 International Conference on Computer Science and Engineering (UBMK), Antalya, 2017, pp. 1132-1136.
- [8] Senzio, Bruno & Asharif, Mohammad & Gutierrez, Carlos & Yamashita, K. (2015). Synchronous Emotion Pattern Recognition with a Virtual Training Environment.
- [9] Abo-Zahhad, M & Ahmed, Sabah & Seha, Sherif Nagib. (2015). A new multi-level approach to EEG based human authentication using eye blinking. *Pattern Recognition Letters*. -. 10.1016/j.patrec.2015.07.034.
- [10] Kurono Y., Sripian P., Chen F., Sugaya M. (2019) A Preliminary Experiment on the Estimation of Emotion Using Facial Expression and Biological Signals. In: Kurosu M. (eds) *Human-Computer Interaction. Recognition and Interaction Technologies. HCII 2019. Lecture Notes in Computer Science*, vol 11567. Springer, Cham
- [11] Alnafjan, Abeer & Hosny, Manar & Al-Ohali, Yousef & Al-Wabil, Areej. (2017). Review and Classification of Emotion Recognition Based on EEG Brain-Computer Interface System Research: A Systematic Review. *Applied Sciences*. 7. 1239. 10.3390/app7121239..
- [12] Schneider, S. L., & Rose, M. (2016). Intention to encode boosts memory-related pre-stimulus EEG beta power. *NeuroImage*, 125, 978–987.
- [13] Liao CY., Chen RC., Liu QE. (2019) Detecting Attention and Meditation EEG Utilized Deep Learning. In: Pan JS., Ito A., Tsai PW., Jain L. (eds) *Recent Advances in Intelligent Information Hiding and Multimedia Signal Processing. IHH-MSP 2018. Smart Innovation, Systems and Technologies*, vol 110. Springer, Cham.
- [14] Azhari, Ahmad & Mardhia, Murein. (2017). Principal component analysis implementation for brainwave signal reduction based on cognitive activity. *International Journal of Advances in Intelligent Informatics*. 3. 125. 10.26555/ijain.v3i3.118.
- [15] A. Azhari and L. Hernandez, "Brainwaves feature classification by applying K-Means clustering using single-sensor EEG," *Int. J. Adv. Intell. Inform.*, vol. 2, no. 3, pp. 167–173, Nov. 2016.
- [16] N. Inc., *Brainwave Signal (EEG) of Neurosky, Inc.* Neurosky, Inc., 2009.
- [17] Xu, J., & Zhong, B. (2018). Review on portable EEG technology in educational research. *Computers in Human Behavior*, 81, 340–349.
- [18] Yudhana, Anton & Fadlil, Abdul & Prianto, Eko. (2018). Performance Analysis of Hashing Methods on the Employment of App. *International Journal of Electrical and Computer Engineering*. 8. 3512-3522. 10.11591/ijece.v8i5.pp3512-3522.
- [19] Zangeneh Soroush M, Maghooli K, Kamaledin Setarehdan S, Motie Nasrabadi A. A review on EEG signals based emotion recognition. *Int Clin Neurosci J*. 2017;4(4):118-129. doi:10.15171/icnj.2017.01.
- [20] Djamal, Esmeralda & Abdullah, Maulana & Renaldi, Faiza. (2017). Brain Computer Interface Game Controlling Using Fast Fourier Transform and Learning Vector Quantization. *Journal of Telecommunication, Electronic and Computer Engineering*. 9. 2289-8131.
- [21] Wanqing Wu, Heye Zhang, Sandeep Pirbhulal, Subhas Chandra Mukhopadhyay and Yuan-Ting Zhang, Assessment of Biofeedback Training for Emotion Management Through Wearable Textile Physiological Monitoring System, *IEEE SENSORS JOURNAL*, VOL. 15, NO. 12, DECEMBER 2015, pp. 7087-7095.
- [22] T. Quazi, S.C. Mukhopadhyay, N. Suryadevara and Y. M. Huang, Towards the Smart Sensors Based Human Emotion Recognition, *Proceedings of IEEE I2MTC 2012 conference*, IEEE Catalog number CFP12MT-CDR, ISBN 978-1-4577-1771-0, May 13-16, 2012, Graz, Austria, pp. 2365-2370.

**LEMBAR HASIL PENILAIAN SEJAWAT SEBIDANG ATAU PEER REVIEW
KARYA ILMIAH: PROSIDING**

Judul karya ilmiah (paper) : Recognizing Human Emotion patterns by applying Fast Fourier Transform based on Brainwave Features
 Jumlah Penulis : 7 Orang
 Nama Penulis : Anton Yudhana, Subhas Mukhopadhyay, Ismail Rakip Karas, Ahmad Azhari, **Murein Miksa Mardhia**, Son Ali, Akbar, Fathia Irbati Ammatulloh
 Status Pengusul : Penulis kelima
 Identitas Prosiding : a. Judul Prosiding : Proceedings of The 2019 International Conference on Informatics, Multimedia, Cyber and Information System (ICIMCIS)
 b. ISBN/ISSN : 978-1-7281-2930-3
 c. Tahun terbit, tempat pelaksanaan : 2019, Yogyakarta, Indonesia, 24-25 Oktober 2019
 d. Penerbit/organizer : IEEE Xplore
 e. Alamat Repository PT / web prosiding : <https://ieeexplore.ieee.org/document/8985227>
 f. Terindeks di (jika ada) : SCOPUS

Kategori Publikasi Makalah : Prosiding Forum Ilmiah Internasional
 (beri V pada kategori yang tepat) Prosiding Forum Ilmiah Nasional

Hasil Penilaian *Peer Review* :

Komponen yang dinilai	Nilai Maksimal Prosiding		Nilai Akhir Yang Diperoleh
	Internasional <input checked="" type="checkbox"/>	Nasional <input type="checkbox"/>	
i. Kelengkapan unsur isi paper (10%)	2,5		2,5
j. Ruang lingkup dan kedalaman pembahasan (30%)	7,5		7
k. Kecukupan dan kemutakhiran data/informasi dan metodologi (30%)	7,5		7
l. Kelengkapan unsur dan kualitas terbitan/prosiding (30%)	7,5		7,5
Total = (100%)	25		(100 x 24) / 6
Nilai Pengusul			1,6

Komentar Peer
Review

1. Tentang kelengkapan dan kesesuaian unsur :

unsur paper telah lengkap dan sesuai

2. Tentang ruang lingkup & kedalaman pembahasan :

pembahasan cukup mendalam dan
lingkungannya luas

3. Kecukupan dan kemutakhiran data serta metodologi :

metodologi yang digunakan cukup
mutakhir

4. Kelengkapan unsur kualitas penerbit :

IEEE memiliki kredibilitas yang baik
dan unsur yang lengkap

5. Indikasi plagiasi :


Tidak ada indikasi plagiat

6. Kesesuaian bidang ilmu :

Sesuai dengan bidang ilmu perantara

November 2020

① Reviewer

Nama :  Sifa Nurzaido
NIP/NIY. : 198011152005011002
Bidang Ilmu : Teknik Informatika
Jabatan Akademik : Lektor
Unit Kerja : Teknik Informatika

*dinilai oleh dua Reviewer secara terpisah

** coret yang tidak perlu

*** nasional/ terindeks di DOAJ, CABI, Copernicus

LEMBAR HASIL PENILAIAN SEJAWAT SEBIDANG ATAU PEER REVIEW
KARYA ILMIAH: PROSIDING

Judul karya ilmiah (paper) : Recognizing Human Emotion patterns by applying Fast Fourier Transform based on Brainwave Features

Jumlah Penulis : 7 Orang

Nama Penulis : Anton Yudhana, Subhas Mukhopadhyay, Ismail Rakip Karas, Ahmad Azhari, **Murein Miksa Mardhia**, Son Ali Akbar, Fathia Irbati Ammatulloh

Status Pengusul : Penulis kelima

Identitas Prosiding :

a. Judul Prosiding : Proceedings of The 2019 International Conference on Informatics, Multimedia, Cyber and Information System (ICIMCIS)

b. ISBN/ISSN : 978-1-7281-2930-3

c. Tahun terbit, tempat pelaksanaan : 2019, Yogyakarta, Indonesia, 24-25 Oktober 2019

d. Penerbit/organizer : IEEE Xplore

e. Alamat Repository PT : <https://ieeexplore.ieee.org/document/8985227> / web prosiding

f. Terindeks di (jika ada) : SCOPUS


Kategori Publikasi Makalah : Prosiding Forum Ilmiah Internasional
(beri v pada kategori yang tepat) Prosiding Forum Ilmiah Nasional

Hasil Penilaian Peer Review :

Komponen yang dinilai	Nilai Maksimal Prosiding		Nilai Akhir Yang Diperoleh
	Internasional <input checked="" type="checkbox"/>	Nasional <input type="checkbox"/>	
a. Kelengkapan unsur isi paper (10%)	2,5		2,4
b. Ruang lingkup dan kedalaman pembahasan (30%)	7,5		7,1
c. Kecukupan dan kemutakhiran data/informasi dan metodologi (30%)	7,5		7,2
d. Kelengkapan unsur dan kualitas terbitan/prosiding (30%)	7,5		7,1
Total = (100%)	25		
Nilai Pengusul			23,8

<p>Komentar Peer Review</p>	<p>1. Tentang kelengkapan dan kesesuaian unsur :</p> <p>Kelengkapan dan kesesuaian unsur dalam artikel ini sudah cukup lengkap dan sesuai</p> <p>2. Tentang ruang lingkup & kedalaman pembahasan :</p> <ul style="list-style-type: none"> Ruang lingkup dan kedalaman pembahasan dalam artikel ini sudah dalam dan baik. <p>3. Kecukupan dan kemutakhiran data serta metodologi :</p> <p>Kecukupan dan kemutakhiran data sudah cukup lengkap dan bagus. Metodologi yang di gunakan sudah sesuai dengan topik penelitian.</p> <p>4. Kelengkapan unsur kualitas penerbit :</p> <p>Unsur kualitas penerbit sudah cukup lengkap dan baik.</p> <p>5. Indikasi plagiasi :</p> <p>Tidak ditemukan indikasi plagiasi dalam artikel ini</p> <p>6. Kesesuaian bidang ilmu :</p> <p>Bidang ilmu antara topik pada artikel ini dengan penulisnya sudah sesuai.</p>
------------------------------------	---

November 2020
Reviewer 2



Nama: Lisna Zehrotun, S.T, M. G
 NID: 60150773
 Bidang Ilmu Informatika
 Jabatan Akademik Lektor
 Unit Kerja S1 Teknik Informatika

*dinilai oleh dua Reviewer secara terpisah
 ** coret yang tidak perlu