



PROCEEDING
OF INTERNATIONAL CONFERENCE
ON GREEN WORLD
IN BUSINESS AND TECHNOLOGY

3rd



*"Intellectual Property Right Based on
Green Social Dynamics, Business and Science-Tech"*

29 March 2014

Yogyakarta, Indonesia

ISSN 2355-553X

Published by :
Ahmad Dahlan University
Kapas Street No.9, Semaki, Umbul Harjo
Yogyakarta 55165

**PROCEEDING OF
INTERNATIONAL CONFERENCE ON GREEN WORLD
IN BUSINESS AND TECHNOLOGY**

*“Intellectual Property Right Based on Green Social Dynamics,
Business and Science-TechIntellectual Property Right Based on
Green Social Dynamics, Business and Science-Tech”*

Author and Speaker

Assoc. Prof. Dr. Zulkifli Mohamed Udin

Assoc. Prof. Pharkphoom Panichayupa- karanant, Ph.D

Anwarudin Hisyam, M.Sc., Ph.D.

Armin A. Fullante, Ph.D.

Reviewer

Dr. Abdul Fadlil, M.T.

Anton Yudhana, S.T., M.T., Ph.D.

Dr. Rusydi Umar, M.T.

Dr. Hj. Dwi Suhartanti, M.Si.

Drs. Aris Thobirin, M.Si.

Publisher

Ahmad Dahlan University

Jln. Kapas No. 9 Semaki, Yogyakarta 55166

Tel. 0274-563515, Fax. 0274-564604

Honorary Chairman

Rector of Ahmad Dahlan University
Dean of Faculty of Industrial Technology
Dean of the faculty of mathematics and science
Chief of Center of Intellectual Property Rights

Streering Committe

Dr. H. Kasiyarno, M.Hum., Dr. H. Muchlas, M.T., Drs. Safar Nasir,
M.Si., Dr. Abdul Fadlil, M.T., Prof. Drs. Sarbiran, M.Ed., Ph.D., Drs.
Aris Thobirin, M.Si., Kartika Firdausy, S.T., M.T., Ida Puspita,
M.A.Res.

Organizing Committee

Dr. Hj. Dwi Suhartanti, M.Si.(Chairman)
Sri Winiarti, S.T., M.Cs. (Vice Chairman)
Iwan Tri Riyadi Yanto, S.Si, M.IT., Endah Sulistiawati, S.T., M.T.,
Nuraini Fatmiyati, Sang Atmaja Edy Kusuma, S.Pd.I., Fradika Indrawan,
S.T., Sukirno, Akhid Muhtadhy, S.TP., Agung Budiantoro, S.Si, M.Si.,
Siti Jamilatun, M.T., Intan Rawit Sapanti, S.Pd., Danang Ari Wibawa,
S.Pd., Dessy Kamila Sari, S.S., Hani Hartaya, Ruslinah, S.Pd., Alif
Alfatiha, S.Ip., Herman Yuliansyah, M.Eng., Ika Arfiani, S.T., Fadlan
Nugroho, Nur Syahid, Ir. Tri Budiyanto, M.T., Heri Setiawan, S.Si.,
M.Si., Utik Bidayati, S.E., MM., Ali Tarmuji, S.T., M.Cs., Sulasmini,
Wening Tri Jayanti, Sri Murni Subekti, Surajiyo, Adil Pandriyo, Joni
Eka Subekti, Suprihatin

Table of Contents

Plenary Speaker

<i>Intellectual Property Right Roles in Green Business and Technology</i> Zulkifli Mohamed Udin	1
<i>Standardization and Preparation of Active Constituent Rich Herbal Extracts</i> Pharkphoom Panichayupakaranant	8
<i>Rare Earth Elements: Impact on Green Technology</i> Anwaruddin Hisyam	11
<i>Green Enviromental Education</i> Armin A. Fullante	16

Economic

<i>Adaptation Process of Livelihood Change from Agriculture to Community-Based Tourism: A Study on Community in Merapi Slope, Sleman Post Merapi Eruption 2010</i> Anggi Rahajeng, Saiqa Ilham Akbar	A-1
---	-----

Health

<i>Impact of Insurance Status on Appropriate Utilization Antihypertensive Medications Based on JNC-7 and Clinical Outcomes Inpatients of "X" Hospital Bantul</i> Rahmawati, F., Akrom., Supadmi, W.	B-1
<i>The 4R Community Empowerment Program: Utilizing waste products from the PKU Muhammadiyah Yogyakarta Hospital Waste</i> Triyani Marwati, Edwin Daru Anggara	B-10

Science

- Effect of Ethanol Eextract Flower (Chrysanthemum cinerariaefolium Trev) on Mortality Mosquito Larvae of Aedes Albopictus (Skuse)*
Trianik Widyaningrum, Eka Lusiana..... C-1
- Natural Products-Based as an Alternative Approach on Acne Treatment*
Yulisna Hawarya, Irfan Yunianto C-11
- The Comparison of Antibacterial Activity of Kefirr Cow's Milk and Kefirr Goat's Milk Againt Escherichia Coli*
Muhammad Iqbal, Dwi Suhartanti..... C-17
- Analysis of pH on Various Herbal Lipsticks*
Yuningsih, Irfan Yunianto C-24
- The Comparison of Antibacterial Activity of Kefir Cow's Milk and Kefir Goat's Milk Against Salmonella Thypusa*
Mei Fajar Nugroho, Dwi Suhartanti C-30
- Effects of Carica Papaya (Caricaceae) Fruit Juice on the Histopathological Image of Mice (Mus Musculus) Testis Strain Swiss Exposed to Cigarette Smoke*
Novi Febrianti, Annisa Ika Putri Ariyana C-37
- A Hybrid Particle Swarm Optimization Steepest Descent Direction*
Iwan Tri Riyadi Yanto C-43
- Analysis of Tree Vegetation Degree in Boyong River Riparian Area, Yogyakarta as a Biology Learning Resource*
Trikinasih Handayani, Lusi Tranwinarti..... C-52
- Antioxidant Activity of Chloroform and Methanol Extract of Piper spp. Leaves*

Ambar Pratiwi, L. Hartanto Nugroho, Yekti Asih Purwestri C-59

Kinetics Evaluation on Oleic Acid Ethyl Ester Synthesis Using Lipase From Rice Bran (Oryza sativa) and Germinated Jatropha Seeds (Jatropha curcas. L)

Indro Prastowo, Chusnul Hidayat, Pudji Hastuti C-64

Technology

Image Processing Application for Detecting the Ripeness of Watermelon Based on Features of the Rind Texture

M. Norman Salim, Murinto D-1

The Development of User Experience Website Design Using Kansei Engineering by Flat and Adaptive Technology Towards Clothing Store to Increase the Simplicity and the Comfort of

Afriq Yasin Ramadhan, Fiftin Noviyanto D-13

Improvement of Working Position on Frying Pan Lathing Process Using The Ergonomics Approach (A Case Study at WL Alumunium metal casting, Yogyakarta)

Agung Kristanto, Dalih Firman Fanany D-21

Biodiesel Production from Rubber Seed Oil with Trans-esterification Process

Siti Salamah , Wahyu H, Setya A.,W. D-34

Internet Network Configuration Using Mikrotik RouterOS

Nur Rochmah Dyah P.A., Tri Wulan Suci Meiwati D-40

Automata Language Theory Learning Media at Push Down Automata Material Based on Multimedia

M Khairul Ridho Dhillon, Wahyu Pujiyono D-49

<i>Conceptual Model of Consumers' Intention to Participate in Cellphone Take Back Program</i>	
Siti Mahsanah BudijatI, Subagyo, M. Arif Wibisono, Nur Aini Masruroh...	D-60
<i>Utilization of Heat Loss by Flue Gas in Using Solid Fuel Furnace to Increase Heat Efficiency</i>	
Martomo Setyawan.....	D-74
<i>The Use of Plug-In As Implementation To Visualize 3D Graphics On the Web (A Study On X3D And WebGL)</i>	
Mursid W. Hananto.....	D-81
<i>The Effect of Condenser Heat Transfer Area to the Condensed Liquid Smoke Volume as the Result of Coconut Shell Pyrolysis</i>	
Siti Jamilatun, Nurkholis	D-91
<i>Location Based Service Application Design for Mobile Promotion SME's Product and the Nearest Bank Service Information</i>	
Merlinda Wibowo, Herman Yuliansyah.....	D-98
<i>SITI Strategic Plan Model Designing in Homestay Venezia</i>	
Nur Cholis Habib, Risa Aditia Wijaya, Sri Handayaningsih.....	D-107
<i>Designing Room Access Control Information System</i>	
Ika Arfiani.....	D-117
<i>The Use of Multimedia Application for Diagnosing Human Skin Deaseas</i>	
Sri Winiarti, Reni Andriyani.....	D-122
<i>B2C (Business To Consumer) E-Paymet Model for Online Shop's Customers</i>	
Arfiani Nur Khusna	D-132
<i>Clustering The Number of Passengers of Trans Jogja Bus for Evaluation</i>	
Lisna Zahrotun.....	D-141

Utilization of Heat Loss by Flue Gas in Using Solid Fuel Furnace to Increase Heat Efficiency

Martomo Setyawan¹

1). Program Studi Teknik Kimia Universitas Ahmad Dahlan
Jl. Prof. Dr. Soepomo, SH Yogyakarta 55164 telp (0274) 379418/381523
email : martomo_setyawan@yahoo.com

Abstract Commercial solid fuel furnace efficiency was too low, the biggest cause of heat loss was heat loss carrying out by the flue gas. The aim of this research was to increase heat efficiency by utilization the flue gas as a preheater the solid fuel.

This research was done with burning 100 grams of wood charcoal by different initial temperature and observed flue gas temperature change in the isolated chamber every 5 minutes. To know utilization of flue gas, put water in the kettle in the isolated chamber and flue gas would heating the water, observed water temperature change, and this experiment was repeated with uninsulated chamber. To know overall heat efficiency was done by burning simultaneously 200 grams wood charcoal that divided each 100 grams with variation of initial temperature, and water was heated in the isolated chamber.

The result show that the higher initial temperature cause faster burning rate until 6th minutes. Using insulation yielded increase heat efficiency amount of 20% with aluminum insulation and 44% with asbestos insulation. Utilization flue gas to heating fuel stock before burning increase heat efficiency amount of 27,8% with isolated furnace.

Keyword : heat loss, flue gas, solid fuel, furnace, increase heat efficiency

1. Introduction

The alternative fuels to replace petroleum fuel were biomass, natural gas, biogas and biofuel. The choice the kind of alternative fuel depend on the typically using. Biomass was an interest kind of fuel that used at the industry and at home, because biomass was rapidly renewable and easy to find its resources.

Using biomass as an alternative fuel usually change the biomass to be a charcoal. This transformation was to increase burning efficiency and to reduce the gas emissions. Charcoal can be made from many kind of biomass. One of the source of biomass is waste from wood industry. Developing biomass charcoal is a strategic step to reduce wood wastes and to supply energy demand.


The problems using charcoal as a fuel at the home were difficult to initial burn, it hard to arrange velocity burning, it hard to stop the burning immediately, and low heat efficiency.

Issues investigated in this study is limited to the effect of temperature on the initial burning velocity, and utilization of heat lost by flue gas convection to increase temperature of the fuel stockpile and to increase the heat efficiency. Another influential variables such as the size of a solid fuel, speed of combustion air and the amount of fuel burning made constant.

The heat loss from the furnace is huge by any calculation of the Energy Efficiency Guide for Industry in Asia - www.energyefficiencyasia.org. Most heat is lost from the furnace flue gas of most dominant at 57, 29% of the heat produced by fuel. Heat efficiency will be increased by taking heat from flue gas to heating the fuel stockpile until near the combustion temperature.

2. Methods

Materials were used in this research were wood charcoal and paraffin, Wood charcoal was purchased randomly from the market. The main equipment was a commercial furnace that bought on the market. To compare it's efficiency, One of these furnace run at the genuine and the one modified by put the isolation, these isolation was functioned as stockpile fuel inventory, these equipment was placed above the furnace and flown the flue gas through this equipment to take the heat into the stockpile fuel and . These equipment shown below

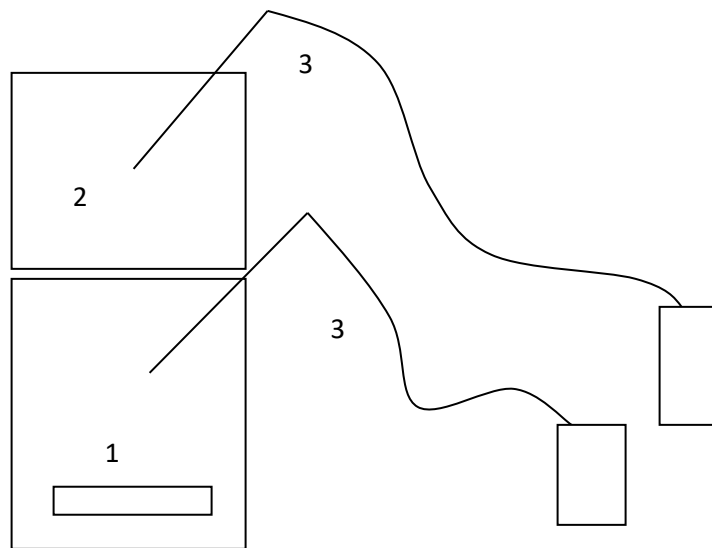

1. Solid Furnace
2. Stockpile place
3. Thermocouple

Fig 1. Furnace with stockpile place

3. Procedures

This experiment was start by measured burning temperature of wood charcoal. 100 grams of wood charcoal were burned at the furnace with fire from 5 grams paraffin as a fuel starter. The furnace temperature was observed, note the temperature that wood charcoal begin burned.

To calculate increasing heat efficiency with heat isolation, first 100 grams of wood charcoal were burned at the furnace without isolation, put a kettle with 1000 grams of water above the furnace to take heat, measured initial water temperature and increasing water temperature each five minutes

Utilization of Heat Loss by Flue Gas

until the top temperature curve reached. Repeat this procedure with two kind of isolation, first aluminum and the second with asbestos isolation.

To compare heat efficiency between combustion without initial heating of charcoal and with initial heating by using flue gas, first 200 grams of wood charcoal were burned at the 2 sections simultaneously, each section 100 gram without initial heating of charcoal. Put 100 grams wood charcoal into the furnace, burn it with 5 grams paraffin, put the kettle with 1000 grams water, measure initial water temperature and measured increasing water temperature each 5 minutes, if the top of water temperature was reached, put 100 grams charcoal remain into the furnace and measured increasing water temperature until the top temperature reached. Repeat procedure above with initial heating.

4. Result and Discussion

4.1. Influence initial temperature Burning

Initial temperature of charcoal was give effect to the velocity burning, as shown at the figure below

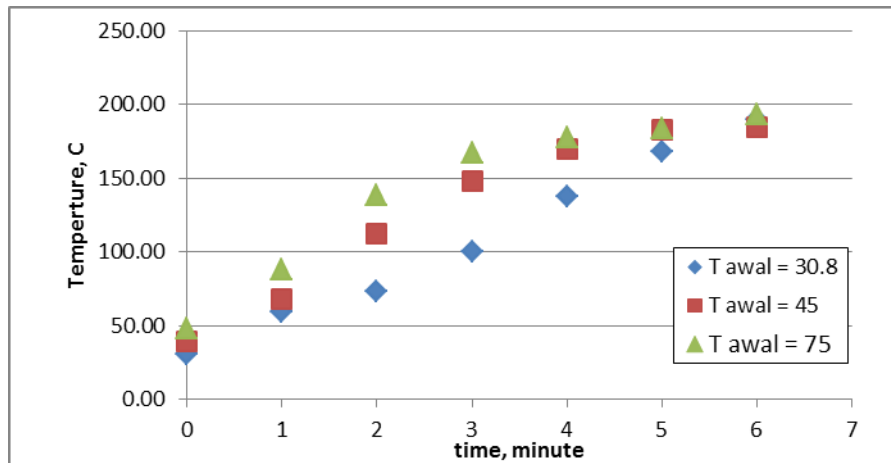


Fig 2. Burning Velocity as function of initial temperature

Figure 2 shows that the higher initial temperature make burning velocity faster at the first six minutes, after this time burning velocity became equal because the temperature was equal.

4.2 Increasing Efficiency by Heat Isolation

Comparison data temperature furnace function time burning between non isolation furnace, isolation by aluminum and asbestos isolation, shown in the graphic below

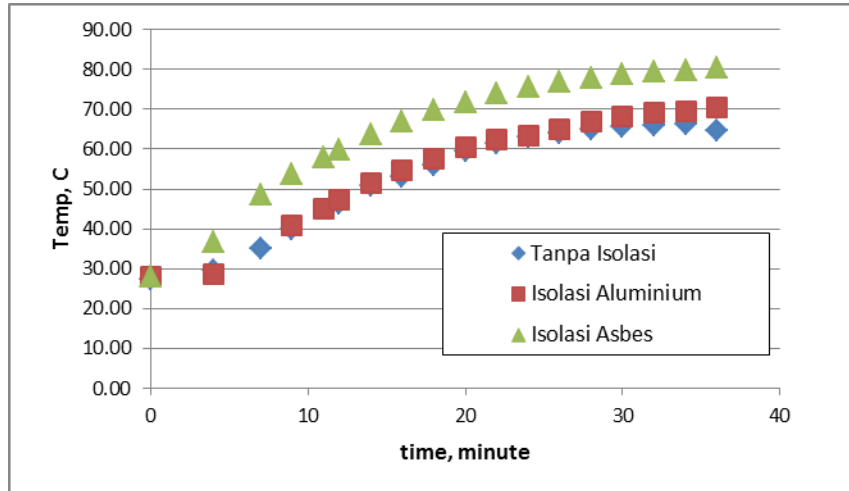


Fig 3. Comparison temperature water

Figure 3 shows that using isolation can make higher temperature of water in the same time burning, it is mean using isolation can increase the heat efficiency. Asbestos isolation was the better isolation than aluminum isolation.

Velocity of heat release from burned fuel can be calculated from this data by formula

$$q = U.A(T - T_{water}) = m.cp (T1-T2)$$

The result of calculation can be shown as graphic below

Utilization of Heat Loss by Flue Gas

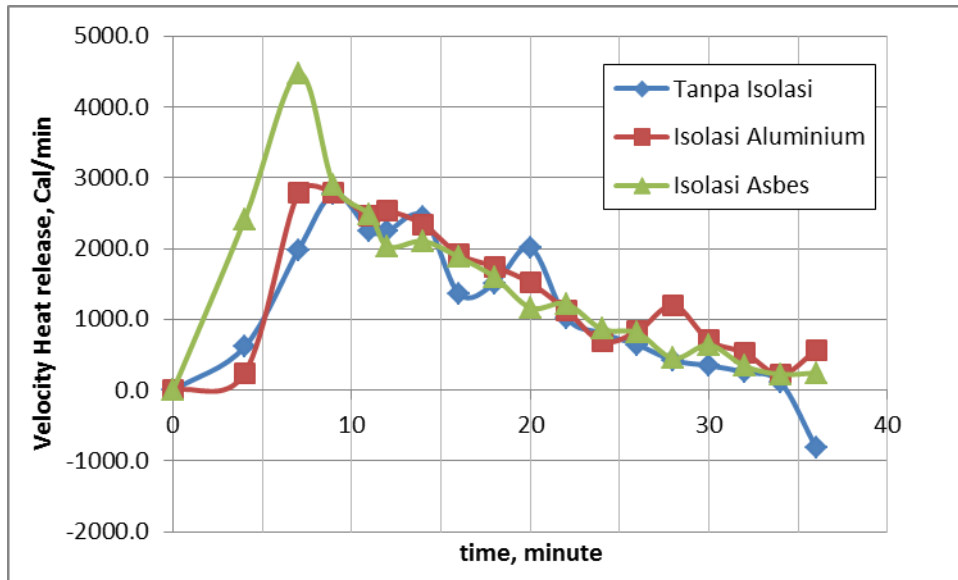


Fig.4. Velocity heat release function of time burning

Figure 4 shows that using asbestos isolation increase absorption of heat by water. It is mean that using isolation can increase heat efficiency. If total heat was calculated as long as 36 minutes, it can be compared as the table below

Table 1. Comparison of heat absorbed

	Heat absorbed in 36 minutes, calorie		
	No Isolation	Aluminum Isolation	Asbestos Isolation
Heat	40887.51	49066.67	58887.29
Percentage	100%	120%	144%

4.3 Utilization of flue gas

Flue gas was resulting by fuel combustion after used to heat the water, it can be used to heat the stockpile fuel, to increase its initial temperature

Comparison data temperature of water function time burning between burning without initial heating and with initial heating in two section burning, shown in the graphic below

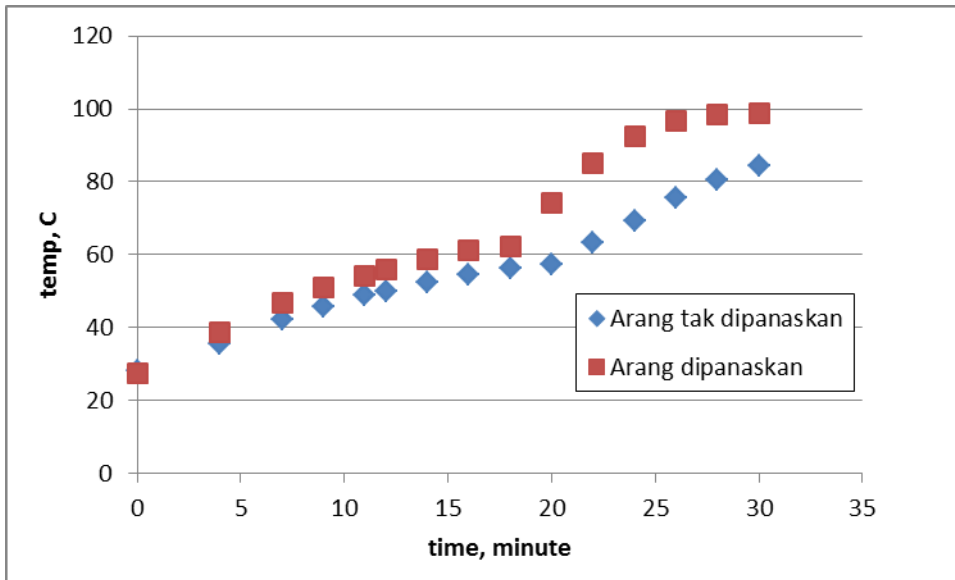


Fig 5. Comparison temperature water in the two sections burning

Figure 3 shows that using isolation can make higher temperature of water in the same time burning, it is mean using isolation can increase the heat efficiency. Asbestos isolation was the better isolation than aluminum isolation.

Velocity of heat release from burned fuel can be calculated from this data by formula

$$q = U.A(T - T_{water}) = m.cp (T1-T2)$$

The result of calculation can be shown as graphic below

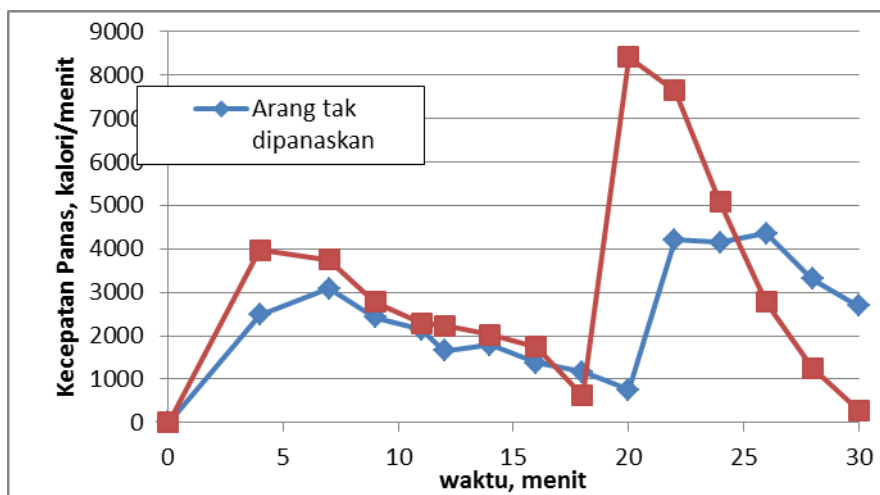


Fig.6. Velocity heat release function of time burning

Figure 4 shows that using heat loss to heating the stockpile of charcoal before burning at the simultaneously burning will increase the heat absorbing, and the heat efficiency will increase 27,8 %

Utilization of Heat Loss by Flue Gas

more than unheated stockpile as shown at the table 2 below.

Table 2. Heat absorbed at the simultaneously burning

	Heat absorbed in 30 minutes, calorie	
	Unheated stockpile	Heated stockpile
heat	77556	99107
percentage	100%	127,8%

5. Conclusion

1. Temperature of charcoal had influence to its burning velocity, Increased temperature will increasing burning velocity at the first six minutes burning.
2. Increasing Utilization of heat burning can be done by flowing the flue gas around the kettle and prevent heat loss by insulation. Aluminum insulation can improve 20% and asbestos insulation can improve 44% of heat absorption.
3. using heat loss to heating the stockpile of charcoal before burning at the simultaneously burning will increase the heat absorbing, and the heat efficiency will increase 27,8 % more than unheated stockpile

References

- Cheremisnoff PN, 1992, *Waste Incineration Handbook*, Butterworth-Heinemann, Oxford.
- Demirbas, A, 2007, *Combustion of Biomass*, Energy Sources, Part A,
- Kurtubi, 2004, *Indonesia : Net Oil Importer*, Center for Petroleum and Energy Economics Studies (CPEES), Jakarta
- Levenspiel, O., 1999, *Chemical Reaction Engineering*, John Wiley and sons, New York
- Perry, R.H., and Green, D.W., 1999, *Perry's Chemical Engineers' Handbook*, McGrawHill, New York
- Shafizadeh F, 1982, Chemistry of Pyrolysis and Combustion of Wood, in *Proceedings: 1981 International Conference on Residential Solid Fuels- Environmental Impacts and Solutions*, Cooper JA, Malek Deds, Oregon Graduate Center, Beverton: 746-771.
- Smith, J.M., 1981, *Chemical Engineering Kinetics*, McGrawHill, Tokyo
- Martomo, S., 2008, *Pengaruh Luas permukaan Briket Arang terhadap Proses Pembakaran*, Laporan Penelitian, Universitas Ahmad Dahlan, Yogyakarta
- Martomo, S., 2009, *Pengaruh kecepatan udara terhadap proses pembakaran bahan bakar padat*, Laporan Penelitian, Universitas Ahmad Dahlan, Yogyakarta
- Munir, S., 2004, *Prospek Teknologi Pemanfaatan Biomas sebagai Sumber Energi Terbarukan Melalui Pengembangan Sistem Pembakaran Dua atau Lebih Tipe Bahan Bakar Padat Konvensional yang Berbeda secara Bersamaan (Co-Firing System)*, Puslitbang Teknologi Mineral dan Batubara.