

Thermogravimetric Analysis kinetic study of Spirulina Platensis Residue Pyrolysis.pdf

By Siti Jamilatun

Thermogravimetric analysis kinetic study of *Spirulina platensis* residue pyrolysis

S Jamilatun^{1*}, A Aktawan¹, A Budiman², I Mufandi³

¹Department of Chemical Engineering, Universitas Ahmad Dahlan, Jl Jend. Ahmad Yani (Ringroad Selatan), Tamanan, Banguntapan, Bantul, Yogyakarta, 55166 Yogyakarta, Indonesia

² Department of Chemical Engineering, Universitas Gadjah Mada, Jl Grafika 2, 55281 Yogyakarta, Indonesia

³Department of Chemical Engineering, Indian Institute of Technology Delhi, New Delhi 110016, India

*Corresponding author: sitijamilatun@che.uad.ac.id

Abstract. Bio-oil from microalgae pyrolysis has excellent potential to be developed as a renewable, sustainable, and environmentally friendly energy fuel. Using pyrolysis technology to use the solid waste from microalgae extraction of *spirulina platensis* as an energy source is a solution for pollution due to biomass extraction. The solid residue is known as *Spirulina Platensis* Residue (SPR). SPR pyrolysis will produce liquid fuel (bio-oil), gas, and biochar. This paper discusses the study of the pyrolysis kinetics of SPR with Thermogravimetric analysis (TGA) by flowing nitrogen, the settlement method using Kissinger - Akahira - Sunose (KAS) and Flynn - Wall - Ozawa (FWO). The samples were heated at a temperature ranging from 30°C to 1000°C with three different heating levels, namely 10, 30, and 50°C/min yang injected 16 mL/min Nitrogen (N₂). The results obtained from the thermal decomposition process show three main stages, namely dehydration, active and passive pyrolysis. The activation energy (*E_a*) and the pre-exponential factor (*A*) obtained by the KAS method were around 42.241 kJ/mol, 51.290 kJ/mol, 54.556 kJ/mol, and 61.604 kJ/mol with conversion of 0.2%, 0.3%, 0.4%, while the estimation of activation energy from FWO 48.963 kJ/mol, 58.107 kJ/mol, 61.498 kJ/mol, and 68.457 kJ/mol with conversion of 0.2%, 0.3%, 0.4%, and 0.5% respectively. the kinetic parameter can be described by using this method. The experimental results show the kinetic parameters obtained from the two methods are slightly different. However, the KAS and FWO methods are quite efficient in explaining the mechanism of the degradation reaction.

1. Introduction

Recently, renewable energy has been one of the interactive issues in Indonesia for discussion in-depth and development because Indonesia has a substantial potential renewable energy source, sustainable energy, and low carbon emission [1]. One type of bio as an energy source is microalgae which attract attention and have several advantages, including high yield per area, 15 times higher than palm oil, increased efficiency in absorbing, no competition with agriculture and food. In addition, microalgae cultivation can be done in photo-bioreactor and open water (sea and pond)[2].

There are three main microalgae components: proteins, carbohydrates, and natural oil (lipids). Microalgae can be converted using pyrolysis to produce bio-fuel about 40% at a temperature ranging from 300°C - 500°C [3]. Pyrolysis is a thermochemical process in which biomass decomposes without



Content from this work may be used under the terms of the Creative Commons Attribution 3.0 licence. Any further distribution of this work must maintain attribution to the author(s) and the title of the work, journal citation and DOI.

oxygen. Next, producing condensable gas in the form of liquid fuel, non-condensable gas, and bio-char as a solid product [4], [5]. Fuel combustion engines can use fuel in liquids and gaseous biofuels with high energy content [6], [7].

An important factor in pyrolysis is the kinetic reaction process where this process is a reaction process which involves reaction time, mass decomposition, and activation energy. [8]. Analysis of reaction kinetics in pyrolysis can be understood in depth using thermogravimetric analysis (TGA)[9]. According to Mishra et al. [10], the TGA method for kinetics study on pyrolysis has high-precision methods. It provides quantitative methods for the examination process and estimation of an effective kinetic parameter. In addition, there are three important procedures to investigate the kinetics and thermal decomposition characteristics of biomass. They are including thermal gravimetric (TG)[11], differential thermal analysis (DTA)[12], and differential thermal gravimetric (DTG) [13].

Next, there are some methods to analyze the kinetic reaction: Model-fitting and model-free methods from isothermal and non-isothermal used in some previous research [14]. According to [15], the fitting model uses several kinetic models for processing TGA data, where the model that provides the best linearization of the TGA data is selected. The model-fitting requires only one TGA data curve for one heating rate. Generally, the model-fitting method is visible to identify in more than one model in the same data with a high fit. However, this makes it challenging to select the best kinetic model. Examples of non-isothermal solid fitting kinetic models are the differential method [16], Freeman-Carroll [17], and Coats-Redfern [18].

Another method to determine decomposition thermal is a model-free method [19]. This method used several data curves at different heating rates to obtain kinetic parameters as a conversion function, commonly called iso-conversion, can be obtained from the calculation. The reaction model used is the same for each conversion with different heating rates. The method for determining these kinetic parameters is quite simple, but the same sample mass and inert gas samples at different heating rates can only carry out [3]. Examples of model-free iso conversion methods are Flynn-Wall-Ozawa (FWO)[20], Kissinger-Akahira-Sunose (KAS)[21], Vyazovkin, Vyazovkin AIC, Friedman, and Starink methods. On the other hand, the Kissinger model is one of the independent models but is not an iso conversion method because the kinetic parameters are assumed to be constant.

The mechanism of the solid-state process, which is a multi-step process with different rates, is complex enough to be approximated by a simple kinetic model [21-22]. This article aims to study the pyrolysis kinetics of *spirulina platensis* residue (SPR). The process mechanism, an iso-conversion method, and the kinetic phenomena in solid-state processes are described in this paper. This method allows the estimation of the kinetic parameters without assuming a reaction model. The effect of temperature and conversion in the thermal decomposition was used in this method as the basic idea. Kissinger-Akahira-Sunose (KAS) and Flynn-Wall-Ozawa (FWO) as two methods were proposed in this research to determine the kinetic parameters of SPR pyrolysis.

Recently, the thermal degradation of lignocellulosic biomass was widely used to determine the kinetic reaction. The field of biomass such as sewage sludge [23], flax stems [13], [24], waste sawdust [25], and poplar wood [26] conducted the previous research. However, there are few studies related to determining the pyrolysis kinetics of low-lipid microalgae. Therefore, this paper aims to determine the thermal degradation of SPR microalgae with TGA, DTA, and DTG through a free-model approach. The expected result is to help design and improve thermochemical conversion systems for low-lipid microalgae.

2. Materials and Method

2.1. Materials

Spirulina platensis (SPR) residue is a solid residue obtained from *Spirulina platensis* (SP) extraction with methanol as solvent. SPR was analyzed to calorific value at the Laboratory of Food and Agricultural Products, Department of Agricultural Technology. The Laboratory of Food and Nutrition, Center for Inter-University (PAU) UGM conducted the proximate analysis. At the same time, the ultimate analysis was carried out at the Testing Laboratory, Tekmira Research and Development Center, Bandung. The Characteristics of SPR are shown in table 1.


Table 1. Characteristics of SPR

Component	SPR
Elemental analysis (wt%)	
Carbon	41.36
Hydrogen	6.60
Nitrogen	7.17
Oxygen	35.33
Higher heating value (MJ/kg)	18.21
Composition (dry-ash-free, wt%)	
Protein	49.60
Lipid	0.01
Carbohydrate	25.60

2.2. Methods

2.2.1. Experiments. Thermal decomposition was tested using TG-DTA (Perkin Elmer Pyris Diamond) at the Academy of Skin Technology, Yogyakarta (Yogyakarta ATK Polytec²⁷c). The SPR as a raw material for each experiment was 4-8 mg. The temperature ranges from 30 to 1000°C together with heating rates of 10, 30, and 50 °C/min. 20 mL/min of nitrogen was injected to maintain oxygen-free pyrolysis conditions with a high-purity nitrogen stream carried out the heating rate.

2.2.2. Kinetic Modeling. The one-step global model assumes that the devolatilization phenomenon takes place as a single reaction. This model was introduced by [27], [28]. Heating rate was used to find TG curve. Three components of biomass (hemicellulose, lignin, and cellulose) was established as equation 1.



Where v represents the char yield of the reaction while (h, c, i) denotes hemicellulose, cellulose, and lignin, in general, decomposition reaction in this model is produced a volatile substance and char.

The sample was pyrolyzed with a non-isothermal thermogravimetric analysis (TGA), and the change in weight of the sample was recorded. The conversion rate for time or degradation, dX/s , depends on the reaction rate constant, which is affected by temperature, $k(T)$, and the conversion, $f(X)$. Equation 2 expressed the detail of TGA as:

$$\frac{dX}{dt} = k(T)f(X) \quad (2)$$

Where X is the conversion, t is the time in minutes, T is the temperature in Kelvin. The rate constant for the reaction represented as k follows the Arrhenius equation:

$$k(T) = Ae^{(-E_a/RT)} \quad (3)$$

Where E_a is the activation energy of the reaction (kJ mol^{-1}), T is the absolute temperature (K), R is the gas constant ($8,314 \text{ J/Kmol}^{-1}$), and A is the pre-exponential factor (min^{-1}). If the conversion (X) is expressed by [24], then the conversion rate from solid-state to volatile product (da/dt) can be written by the following equation:

$$\frac{da}{dt} = k(T)f(\alpha) \quad (4)$$

33

Where α , t , $k(T)$, and $f(\alpha)$ are symbols of conversion rate, time, the reaction rate constant, and conversion, respectively. Calculating the mass at the initial time can also use α and $k(T)$ as follows:

$$\alpha = \frac{m_i - m_a}{m_i - m_f} \quad (5)$$

where:

1

- m_a is the weight of SPR at time t ,
- m_i is the initial weight of SPR, and
- m_f is the final weight of SPR at the end of the reaction.

The combination of the two equations (4) and (5) gives the expression of the fundamental in equation (6) analytical method for calculating the kinetic parameters, based on the TGA results.

$$\frac{d\alpha}{dt} = A \cdot f(\alpha) \cdot e^{-E_a/RT} \quad (6)$$

3

The expression function $f(\alpha)$ is used to describe a first-order reaction for the solid-state. Hence many authors limit the mathematical function $f(\alpha)$ to the following expression:

$$f(\alpha) = (1 - \alpha)^n \quad (7)$$

Where n presents the order of the reaction. From the equations (6) and (7) becoming equation (8) states the reaction rate in the form:

$$\frac{d\alpha}{dt} = A \cdot (1 - \alpha)^n e^{-E_a/RT} \quad (8)$$

For the heating, the rate can express it as

$$\beta = \frac{31}{dt} = \frac{d\alpha}{dt} \frac{dt}{dT} \quad (9)$$

Where $d\alpha/dT$ is the non-isothermal reaction rate and substitution of equations (8) and (9), this produces the following equation:

$$\frac{d\alpha}{dt} = \frac{A}{\beta} (1 - \alpha)^n e^{-E_a/RT} \quad (10)$$

Equation (10) is reduced to a linear equation; furthermore, the kinetic parameters are evaluated from the plot of the y-axis versus the x-axis that is the fundamental equation to determine the thermal degradation kinetic methods using 15 conversion methods [29]. In this study, two general iso-conversion methods are performed by Kissinger-Akahira-Sunose (KAS) and Flynn-Wall-Ozawa (FWO) [26]. According to [30], the KAS and FWO method can be selected and applied to determine TG/DTG data. The advantage of KAS and FWO methods is that the calculated activation energy (E_a) is allowed without any prior knowledge of the analytical form of the conversion function (f_a) [31]. This method also can provide a capability to describe the kinetic mechanics of pyrolysis [32].

2.3. Model-free methods

19

2.3.1. Kissinger – Akahira – Sunose (KAS). Kissinger-Akahira-Sunose (KAS) method is an iso-conversion method to obtain the kinetics of the solid state reaction without knowing the reaction mechanism. This method was introduced by [33] that variation of peak temperature with heating rate can be derived from the kinetic of reaction in a differential thermal. In this paper, the equation (10) can be derived to the equation (11) by using KAS methods as follows:

$$\ln\left(\frac{\beta_i}{T_{ai}^2}\right) = \ln\left(\frac{A \alpha R}{E_a g \alpha}\right) - \frac{E_a}{RT_{ai}} \quad (11)$$

Where i is the heating rate, $T_{\alpha i}^2$ is the temperature for each predefined conversion at different heating rates, E_{α} is the activation energy for each conversion, A_{α} is the pre-exponential factor for each conversion, g_{α} as the integral of $f(\alpha)$. The slope of the graph $(-E_{\alpha}/RT)$ is used to calculate the activation energy. Meanwhile, the intercept plot $\ln(\beta_i/T_{\alpha i})$ versus $1000/T_{\alpha i}$ shows a pre-exponential factor.

2.3.2 Flynn – Wall – Ozawa Method. The FWO method was introduced by [34], [35] which it makes possible to obtain the activation energy (E_a) of the logarithm of the heating rate, $\ln\beta_i$, versus $1052/T_{\alpha i}$, which represents a linear relationship with specific conversion values at different heating rates. Flynn-Wall-Ozawa (FWO) method was another iso-conversion method that can be expressed as in equation 12 as follows:

$$\ln(\beta_i) = \ln\left(\frac{A_{\alpha}E_{\alpha}}{Rg(\alpha)}\right) - 5.331 - 1.052 \frac{E_{\alpha}}{RT_{\alpha i}} \quad (12)$$

Where $g(\alpha)$ is constant at the given conversion value, the subscripts i and α show the offered heating rate and conversion value, respectively. The activation energy E_{α} is calculated from the slope of $1.052E_{\alpha}/R$. Calculating the slope ($1.052E_{\alpha}/R$) and the intercept plot (β_i) versus $1000/T_{\alpha i}$ estimated the slope activation energy and pre-exponential factor.

3. Result and Discussion

3.1. Thermogravimetric Analysis

The thermal decomposition of *Spirulina platensis* residue (SPR) can be determined by the thermogravimetric analysis shown by the DTA, TG, and DTG curves. The DTA curve is used to describe the temperature difference between a substance and a thermally inert reference material that is measured as a function of the temperature (T). The TG curve is used to describe the thermal analysis, and the DTG curve is used to describe the weight loss or increase at heating rate. The experiment was carried out at a temperature ranging from 30°C to 1000°C with a heating rate of 10, 30, dan 50 °C/min, respectively, flowed 20 mL/minute nitrogen (N₂). The profile of sample mass (TG curve) can be expressed by the thermo-gravimetric analysis directly. The shape of derivative mass losses (DTG) can be defined by $d(m/m_o)/dT$. Figures 1 and 2 can describe the TG-DTG profile.

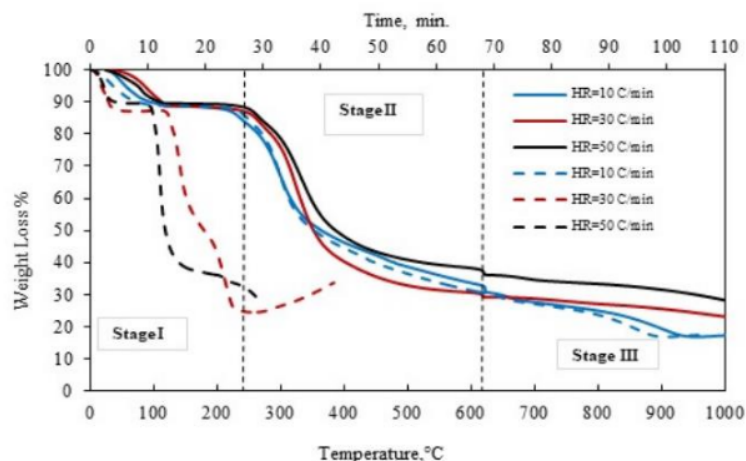


Figure 1. TG of weight loss curves of spirulina platensis residue at three heating rates with three stages: dehydration, active and passive pyrolysis

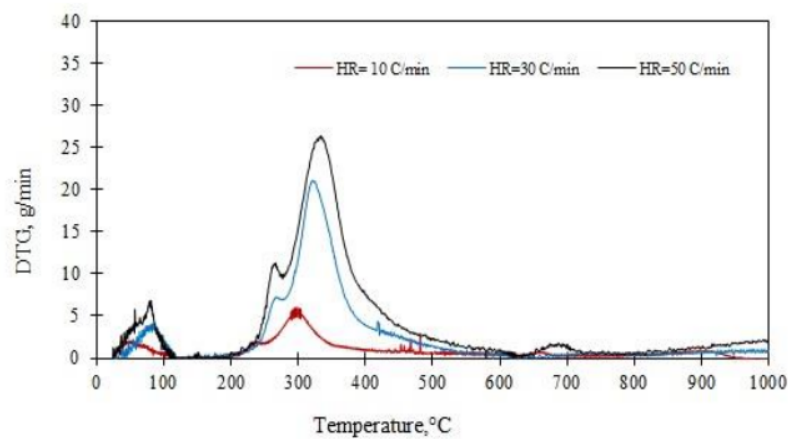


Figure 2. DTG of a spirulina platensis residue at different heating rates.

Figure 1 Indicated that the thermal decomposition process of SPR was divided into three stages: water dehydration, active pyrolysis, and passive pyrolysis. The effect of temperature on pyrolysis is proportional to the process of mass decomposition at SPR which the pyrolysis temperature increases while the mass weight decreases slightly. The pyrolysis temperature increases with increasing heating rate, but the final temperature was not affected. The detail of thermal decomposition is described in table 2.

Table 2. Thermal decomposition of SPR

Thermal decomposition	Heating rate (°C/min)		
	10	30	50
Stage I (water dehydration)	30°C - 220°C	30°C - 240°C	30°C - 260°C
Stage II (active pyrolysis)	221°C - 615°C	241°C - 585°C	261°C - 600°C
Stage III (passive pyrolysis)	616°C - 1000°C	586°C - 1000°C	601°C - 1000°C

The water dehydration process releases water content, adsorbed water on the SPR sample, and evaporates the light volatile components. Weight loss in stage I is around 11-15%. Weight loss in the active pyrolysis process is about 55-60%. In the active pyrolysis process, most cellulose and hemicellulose are decomposed to produce chemical compounds such as benzene, toluene, phenol alkenes, and alkanes, among other compounds. The passive pyrolysis process, commonly called gasification, occurs when lignin is decomposed. The nature of lignin is relatively stable to heat so that the decomposed mass is quite small and the weight loss is insignificant. The weight loss curve (TG) in figure 1. shows the mass loss with the temperature at different heating rates on the SPR. Thermal decomposition in this study was relevant with some literature survey that summary is listed in table 3, which includes the TGA technique in the previous research and pyrolysis behavior into three stages.

Table 3. Investigations on pyrolysis behavior using thermogravimetric Analysis from the previous study


Heating rate (°C/min)	Temp operation (°C)	Mass loss temperature range (°C)						Ref
		Stage 1	Mass loss of stage 1	Stage 2	Mass loss of stage 2	Stage 3	Mass loss of stage 3	
10, 40, 70, and 100	0-1000	25-200	10%	200-600	41.5%	>600	Lower mass loss	[36]
5, 10, and 20	0-1000	25-200	Moisture loss	200-600	-	>600	-	[37]
10, 20, and 30	100-1000	<150	0.87%	150-584	35.49%	584-800	5.07%	[38]
5, 10, 20, and 30	25-900	25-200	Moisture loss	200-500	55%	500-600	20%	[39]
10	25-900	150-300	22.5%	200-450	41.7%	450-600	5.7%	[40]

The effect of derivat¹³ thermogravimetric (DTG) on heating rate can be seen in figure 2. DTG curve indicates that when the heating rate increases, the DTG value¹³ increases, and the DTG curve changes based on the higher temperature range. In this process, the¹⁰ active and passive pyrolysis region is also increasing. Different h²³ heating rates in this experiment was 10°C/min, 30°C/min, and 37⁰°C/min which mass decomposition in heating rate 10°C/min begins³⁹ a reasonably low curve and at a temperature of 300°C. In contrast, the heating rate of 30°C/min and 50°C/min occurs in the temperature ranging from 350°C to 600°C. Then, above a temperature of about 700°C, the process of mass decomposition proceeds slowly. The TG and DTG curves with variations in heating rate tend to shift towards higher temperatures. The starting point and endpoint of the active pyrolysis region are located at higher temper³⁶es for higher heating rates. The range of active pyrolysis decomposition rates is extensive for higher heating rates. The higher the heating rate, the maximum decomposition rate is located at a higher temperature and has a higher value. This phenomenon indicates that there is a limit to heat transfer. An immediate amount of energy is required for the system. It takes a longer reaction time to reach a temperature equivalent to the furnace temperature when low heating rate. The reaction time is shorter at a higher heating rate, so the sample requires a higher temperature to decompose. These results were consistent with the prevision research in the field of microalgae. The detail of the comparison from previous research is described in table 4.

Table 4. Comparison of the thermal decomposition of microalgae

Microalgae Species	Experiment result			Heating Rate	Ref
	Stage I	Stage II	Stage III		
Chlorella Vulgaris	Temperature ranging from 25°C to 150°C. in this stage, water and light volatile compound are lost	Temperature ranging from 150-450°C. most of the organic species are decomposed in this stage	From 460-600°C. in this stage, there are very slight weight losses, and carbonaceous reduction are decomposed	heating rate of 10, 20, and 40°C/min.	[41]
Spirulina Sp	Starting at 50-200°C. the first stage is dehydration which moisture remove from the sample	Starting at 200-600°C. in the second stage, the weight loss is approximately 60%	Starting at 600-900°C, the weight loss is lost slowly.	the heating rate of 10 °C/min and temperature ranging from 50-600°C	[42]
Chlorella Vulgaris	Starting at 0-150 °C	Starting at 150-450°C, in this stage, the thermal degradation of carbohydrate, protein, and lipid was lost	Starting at higher than 540°C. the thermal degradation was decayed slightly	heating rate 10 °C/min and 20 °C/min	[43]
This study	Process dehydration occurs in this stage, with temperature ranging from 30 to 220 °C	Starting at 221-615°C active pyrolysis occurs in this stage	Starting at 616-1000°C Passive pyrolysis occurs in this stage	the heating rate of 10 °C/min, 30 °C/min, and 50 °C/min	

Differential thermal analysis (DTA) of SPR can be seen in figure 3. During the TGA experiment, constant heating rate measures the temperature difference between the heating temperature of SPR and the references material. The peak of the DTA curve represents the thermal condition which a positive peak value describes an endothermic process while a negative value indicates the exothermic process.

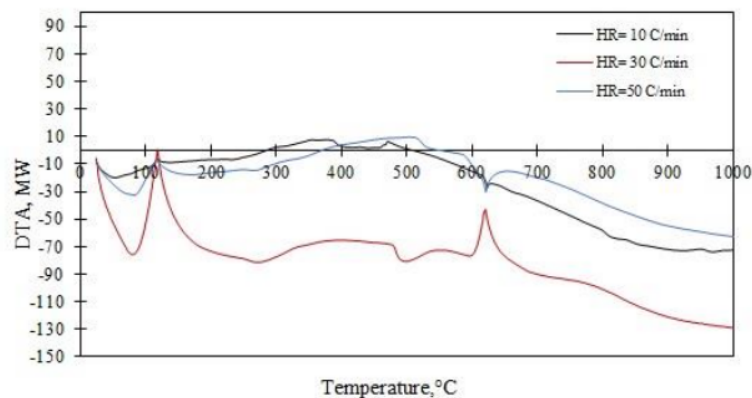**Figure 3.** Differential thermal analysis (DTA) of SPR

²⁵ Kinetic analysis based on the KAS and FWO ⁵ Kinetic analysis based on the KAS ¹⁰ FWO was used to calculate the kinetic parameters from ⁷ a thermogravimetric study using the model-free method. The activation energy (E_a) and the pre-exponential factor (A) were obtained using the Kissinger-Ak³⁴ra-Sunose (KAS) and Flynn-Wall-Ozawa (FWO) methods. The KAS method uses equation (11) to determine ³⁸ activation energy and pre-exponential factor. At the same time, the FWO method uses equation (12) to determine the activation energy and pre-exponential factor. The plot of regression shown from $\ln(\beta/T^2m)$ versus $1000/T$, ² that illustrated in figure 4. The regression and quadratic equations of the correlation coefficient (R^2) are also presented. The activation energy (E_a) and the pre-exponential factor (A) are derived from the slope and cross of ⁴³ plotting regression line, respectively. The results obtain ⁵ from the KAS method are provided in table 3; the average activation energy (E_a) value and the pre-exponential factor of KAS methods are 52.423 kJ/mol and 1.363×10^4 . The experiment was used the same value of α from range 0.20 to 0.50. The heating rate in this calculation was followed by figure 1, in which β indicated from 10, 30, and 50°C/min.

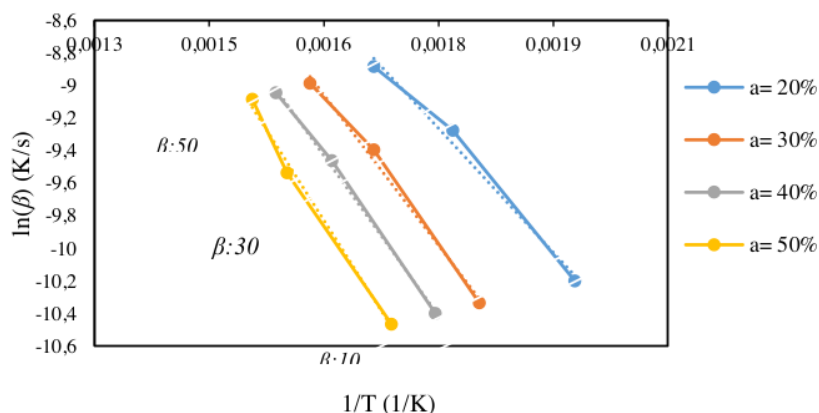


Figure 4. KAS Method of kinetic analysis of SPR

Figure 4 shows the change in conversion with the sample temperature at different heating rates in determining the kinetic parameters. The ¹² results of the activation energy value calculation, pre-exponential, can be seen in table 3, which all curves at different heating rates, and we find the appropriate temperature. ²ot FWO was described in $\ln(\beta_i)$ versus $1000/TaK^{-1}$ other conversion value shown in figure 5. The activation energies are obtained from the slope and pre-exponential factor of the regression line intercepts and are given in table 5—the calculated square of the correlation coefficient, R^2 . The average activation energy (E_a) value and pre-exponential (A) of FWO methods are 59.257 kJ/mol and 8.206×10^4 .

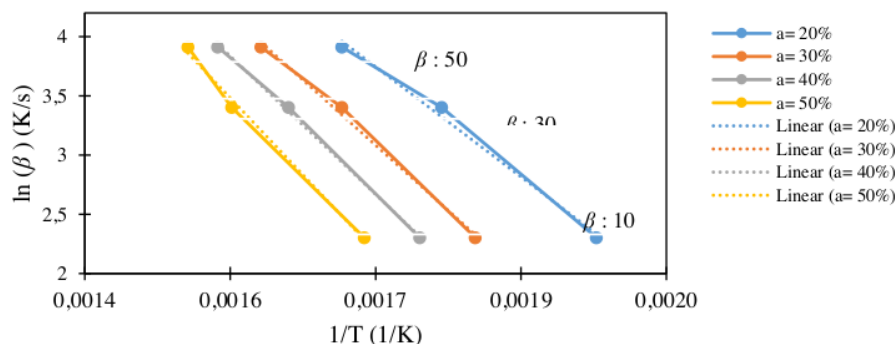


Figure 5. FWO method of kinetic analysis of SPR


Thermogravimetric analysis is a common technique used to evaluate the thermal decomposition of biomass. In addition, iso-conversion methods such as KAS, FWO, and Kissinger are widely used to determine the kinetic parameters. In this study, KAS and FWO were used to determine the SPR reaction kinetics.

21

Table 5. The activation energy of SPR obtained by KAS and FWO method

α (x/%)	KAS Method			FWO Methods		
	Activation Energy, E_a (kJ/mol)	A (min^{-1})	Coefficient of Determination, R^2	Activation Energy, E_a (kJ/mol)	A (min^{-1})	Coefficient of Determination, R^2
0.20	42.241	0.781×10^3	0.9886	48.963	7.134×10^3	0.9929
0.30	51.290	4.963×10^3	0.9931	58.107	3.536×10^4	0.9955
0.40	54.556	9.755×10^3	0.9978	61.498	6.564×10^4	0.9986
0.50	61.604	3.902×10^4	0.9927	68.457	2.201×10^5	0.9944
Average	52.423	1.363×10^4		59.257	8.206×10^4	

The appearance of activation energy by using KAS and FWO methods can be seen in figure 6. From the calculation, the energy activation from KAS and FWO is not the same for all conversions that can observe. It suggests the existence of a complex multi-step mechanism that occurs in the solid state. This mechanism shows that the reaction mechanism is not the same in the overall decomposition process, and the activation energy depends on the conversion. The estimation of activation energy from KAS method is around 42.241 kJ/mol, 51.290 kJ/mol, 54.556 kJ/mol, and 61.604 kJ/mol with conversion of 0.2%, 0.3%, 0.4%, and 0.5% respectively. While the estimation of activation energy from FWO 48.963 kJ/mol, 58.107 kJ/mol, 61.498 kJ/mol, and 68.457 kJ/mol with conversion of 0.2%, 0.3%, 0.4%, and 0.5% respectively. These results are indicated that activation energy from FWO is more than the activation energy of the KAS method. The clear correlation between conversion and activation energy can be seen in figure 6.

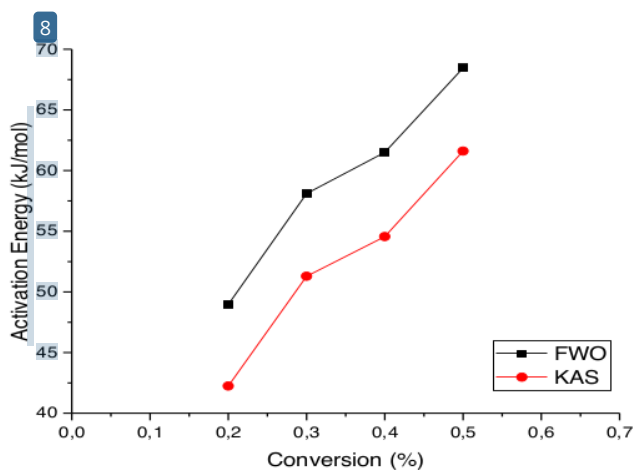

19

Figure 6. The activation energy is a function of conversion.

24

The use of KAS and FWO methods were justified the ICTAC committee's recommendation for a model-free method and affected by the use of catalyst. The term of its dependability validated the kind of biomass the experiment in this study was without these methods. Based on table 6 obtained, the average activation energy in this study is relevant to several kinds of literature. KAS and FWO methods

were proven and able to interpretation the kinetic reaction of biomass. The difference of activation in this study with the previous research was a catalyst.

Table 6. the comparison of kinetic methods and activation energy from the previous study

Biomass types	Methods	Activation energy (kJ/mol)	references
Banana leaves	KAS, FWO, Starink, and Friedman	79.36, 84.02, 92.12, and 73.89	[44]
Sugar leaves	FWO, KAS, and Starink	226.97, 226.75, and 226.94	[45]
Coconut shell	FWO and KAS	99.2 and 94.7	[46]
Chlorella	KAS and FWO	148.75 and 150.99	[47]
Vulgaris with catalyst			
C. Vulgaris	KAS and FWO	131.228 and 142.678	[41]

4. Conclusion

Kinetic studies on *Spirulina Platensis* Residue (SPR) in this study are presented in DTA, TG, and DTG curves to determine the mass decomposition of the reaction. In addition, the calculation of kinetic analysis to determine the response kinetics parameters from the results of the thermogravimetric study uses the model-free method. The activation energy (E_a) and pre-exponential factor (A) were obtained by the Kissinger-Akahira-Sunose (KAS) and Flynn-Wall-Ozawa (FWO) methods. The process of mass decomposition in SPR occurs in 3 areas: dehydration, active pyrolysis, and passive pyrolysis. The effect of temperature on pyrolysis is proportional to the process of mass decomposition at SPR. The higher the pyrolysis temperature, the higher the weight loss. The water dehydration process occurs at a temperature of 30°C-240°C. Active pyrolysis process from 240-610°C, and passive pyrolysis process from 610 - 1000°C called gasification where lignin is decomposed. The plot of KAS shown from $\ln(\beta/T_m^2)$ versus $1000/T_m K^{-1}$. At the same time, Plot FWO is shown as $\ln(\beta)$ versus $1000/T_m K^{-1}$ for different conversion values. The average activation energy (E_a) value dan pre-exponential (A) of KAS methods are 52.423 kJ/mol and 1.363×10^4 .

In comparison, the average activation energy (E_a) value dan pre-exponential (A) of FWO methods are 59.257 kJ/mol and 8.206×10^4 . The appearance of activation energy by using KAS and FWO methods is not similar. The FWO and KAS methods of activation energy and pre-exponential factors show the mechanism of complex reactions during the pyrolysis process.

5. Reference

- [1] Jacobson K, Maheria K C, and Dalai A K 2013 *Renew. Sustain. Energy Rev.* **23** 91–106
- [2] Priyadarshani I and Rath B 2012 *J. Algal Biomass Utiln.* **3**(4) 89–100
- [3] Jamilatun S, Mufandi I, Evitasari R T, and Budiman A 2020 *Int. J. Renew. Energy Res.* **10**(2) 678–686
- [4] Bridgewater A 2013 Fast pyrolysis of biomass for the production of liquids in *Woodhead Publishing Series in Energy, Biomass Combustion Science, Technology and Engineering* Woodhead Publishing
- [5] Treedet W, Suntivarakorn R, Mufandi I, and Singbua P 2020 *Int. Energy J.* **20**(2) 155–168
- [6] Xu Y, Hu Y, Peng Y, Yao L, Dong Y, Yang B, Song R 2020 *Bioresour. Technol.* **300**(October 2019) 122665
- [7] Mufandi I, Treedet W, Singbua P, and Suntivarakorn R 2020 *KKU Res. J.* **20**(December) 94–107
- [8] Chen R, Zhang D, Xu X, and Yuan Y, 2021 *Fuel* **295**
- [9] Saeed S, Ashour I, Sherif H, and Ali M R O 2020 *Egypt. J. Chem.* **63**(2) 683–702
- [10] Mishra G, Kumar J, and Bhaskar T 2015 *Bioresour. Technol.* **182** 282–288
- [11] Singh S, Patil T, Tekade S P, Gawande M B, and Sawarkar A N 2021 *Sci. Total Environ.* **783** 147004
- [12] Wen Y, Wang S, Mu W, Yang W, and Jönsson P G 2020 *Fuel* **277**(December 2019) 118173

- [13] Wang X, Hu M, Hu W, Chen Z, Liu S, Hu Z, and Xiao B 2016 *Bioresour. Technol.* **219** 510–520
- [14] Soria-Verdugo A, Morgano M T, Mätzing H, Goos E, Leibold H, Merz D, Riedel U, and Stapf D 2020 *Energy Convers. Manag.* **212**(April) 112818
- [15] Mandapati R N and Ghodke P K 2021 *Fuel* **303**(June) 121285
- [16] Pan L, Dai F, Li G, and Liu S 2015 *Energy*. **86** 749–757
- [17] Criado J M, Dollimore D, and Heal G R 1982 *Thermochim. Acta* **54**(1–2) 159–165
- [18] Mian I, Li X, Jian Y, Dacres O D, Zhong M, Liu J, Ma F, and Rahman N 2019 *Bioresour. Technol.* **294**(August) 122099
- [19] Liu H, Chen B, and Wang C 2020 *Fuel Process. Technol.* **208**(June) 106509
- [20] Yang H, Ji G, Clough P T, Xu X, and Zhao M 2019 *Fuel Process. Technol.* **195**(May) 106145
- [21] Lim A C R, Chin B L F, Jawad Z A, and Hii K L 2016 *Procedia Eng.* **148** 1247–1251
- [22] Lopes F C R and Tannous K 2020 *Thermochim. Acta*, **691**(April) 178714
- [23] Liu H, Xu G, and Li G 2021 *Process Saf. Environ. Prot.* **149** 48–55
- [24] Ding Y, Ezekoye O A, Lu S, Wang C, and Zhou R 2017 *Energy Convers. Manag.* **132** 102–109
- [25] Mishra R K and Mohanty K 2018 *Bioresour. Technol.* **251**(October 2017) 63–74
- [26] Slopiecka K, Bartocci P, and Fantozzi F 2012 *Appl. Energy* **97** 491–497
- [27] Ding Y, Ezekoye O A, Zhang J, Wang C, and Lu S 2018 *Fuel* **232**(May) 147–153
- [28] Ding Y, Wang C, Chaos M, Chen R, and Lu S 2016 *Bioresour. Technol.* **200** 658–665
- [29] Islam M A, Auta M, Kabir G, and Hameed B H 2016 *Bioresour. Technol.*, **200**(October 2017) 335–341
- [30] Rahib Y, Sarh B, Bostyn S, Bonnamy S, Boushaki T, and Chaoufi J 2020 *Mater. Today Proc.* **24** 11–16
- [31] Mothé C G and De Miranda I C 2013 *J. Therm. Anal. Calorim.* **113**(2) 497–505
- [32] Rego F, Dias A P S, Casquilho M, Rosa F C, and Rodrigues A 2020 *Energy* **207** 118191
- [33] Kissinger H E 1956 *Cardiovasc. Probl. Emerg. Med. A Discuss. Rev.* **57**(4) 123–137
- [34] Smith I T 1964 *Naturae Publ. Gr.* **201** 69
- [35] Ozawa T 1965 *Bull. Chem. Soc. Jpn.* **38**(11) 1881–1886
- [36] Kan T, Strezov V, and Evans T 2016 *Energy and Fuels* **30**(3) 1564–1570
- [37] Naqvi S R, Tariq R, Shahbaz M, Naqvi M, Aslam M, Khan Z, Mackey H, Mckay G, and Al-Ansari T 2021 *Comput. Chem. Eng.* **150** 107325
- [38] Lin Y, Liao Y, Yu Z, Fang S, Lin Y, Fan Y, Peng X, and Ma X 2016 *Energy Convers. Manag.*, **118** 345–352
- [39] Im H and Kim C G 2017 *J. Mater. Cycles Waste Manag.* **19**(3) 1044–1051
- [40] Cao J P, Shi P, Zhao X Y, Wei X Y, and Takarada T 2014 *Fuel Process. Technol.* **123** 34–40
- [41] Azizi K, Moraveji M K, and Najafabadi H A 2017 *Bioresour. Technol.* **243** 481–491
- [42] Chaiwong K, Kiatsiriroat T, Vorayos N, and Thararax C 2013 *Biomass and Bioenergy* **56** 600–606
- [43] Bach Q V and Chen W H 2017 *Energy Convers. Manag.* **131** 109–116
- [44] Singh R K, Pandey D, Patil T, and Sawarkar A N 2020 *Bioresour. Technol.* **310**(April) 123464
- [45] Kumar M, Sabharwal S, Mishra P K, and Upadhyay S N 2019 *Bioresour. Technol.* **279**(January) 262–270
- [46] Ali I, Bahaitham H, and Naibulharam R 2017 *Bioresour. Technol.* **235** 1–11
- [47] Bong J T, Loy A C M, Chin B L F, Lam M K, Tang D K H, Lim H Y, Chai Y H, and Yusup S 2020 *Energy* **207** 118289

Acknowledgments

The author would like to thank the research funding assistance through the Internal Research Fund Scheme through the Lembaga Penelitian dan Pengabdian Masyarakat Universitas Ahmad Dahlan Yogyakarta.

Thermogravimetric Analysis kinetic study of Spirulina Platensis Residue Pyrolysis.pdf

ORIGINALITY REPORT

19%

SIMILARITY INDEX

PRIMARY SOURCES

- | | | |
|---|---|---------------|
| 1 | ejournal.undip.ac.id
Internet | 76 words — 2% |
| 2 | Du, Xujie, Xiaodong Li, Meishuai Zou, Rongjie Yang, and Siping Pang. "Thermal kinetic study of 1-amino-1,2,3-triazolium nitrate", Journal of Thermal Analysis and Calorimetry, 2014.
Crossref | 75 words — 1% |
| 3 | Nawshad Muhammad, Yanan Gao, Muhammad Irfan Khan, Zakir Khan, Abdur Rahim, Farasat Iqbal, Amir Sada khan, Jibran Iqbal. "Effect of ionic liquid on thermo-physical properties of bamboo biomass", Wood Science and Technology, 2015
Crossref | 67 words — 1% |
| 4 | Selim Ceylan. "Kinetic analysis on the non-isothermal degradation of plum stone waste by thermogravimetric analysis and integral Master-Plots method", Waste Management & Research, 2015
Crossref | 36 words — 1% |
| 5 | worldwidescience.org
Internet | 36 words — 1% |
| 6 | journal.ugm.ac.id
Internet | 34 words — 1% |

- 7 Chaiwang, Pilaiwan, Benjapon Chalermssinsuwan, and Pornpote Piumsomboon. "Thermogravimetric Analysis and Chemical Kinetic for Regeneration of Sodium Carbonate Solid Sorbent", Advanced Materials Research, 2015. 33 words — 1%
Crossref
-
- 8 pureadmin.qub.ac.uk 30 words — 1%
Internet
-
- 9 sciendo.com 29 words — 1%
Internet
-
- 10 Abhisek Sahoo, Rupali Gautam, Sachin Kumar, Kaustubha Mohanty. "Energy optimization from a binary mixture of non-edible oilseeds pyrolysis: Kinetic triplets analysis using Thermogravimetric Analyser and prediction modeling by Artificial Neural Network", Journal of Environmental Management, 2021 27 words — 1%
Crossref
-
- 11 math.haifa.ac.il 27 words — 1%
Internet
-
- 12 Zhenxin Jiang, Qingyan Chu, Haiyu Yang, RongRong Zhao, Yueman Yu, Ming Wang, Ransheng Liu. "Kinetic model for removing phosphorus and zinc from waste lubricating oil by pyrolysis", Process Safety and Environmental Protection, 2021 26 words — 1%
Crossref
-
- 13 Garima Mishra, Jitendra Kumar, Thallada Bhaskar. "Kinetic studies on the pyrolysis of pinewood", Bioresource Technology, 2015 25 words — < 1%
Crossref
-
- 14 I.V. Babich, M. van der Hulst, L. Lefferts, J.A. Moulijn, P. O'Connor, K. Seshan. "Catalytic 25 words — < 1%

pyrolysis of microalgae to high-quality liquid bio-fuels", Biomass and Bioenergy, 2011

Crossref

-
- 15 core.ac.uk 24 words — < 1%
Internet
-
- 16 M. Radhakumari, D. Jaya Prakash, B. Satyavathi. "Pyrolysis characteristics and kinetics of algal biomass using tga analysis based on ICTAC recommendations", Biomass Conversion and Biorefinery, 2015 22 words — < 1%
Crossref
-
- 17 dspace.sctimst.ac.in 21 words — < 1%
Internet
-
- 18 Mothé, Cheila G., and Iara C. de Miranda. "Study of kinetic parameters of thermal decomposition of bagasse and sugarcane straw using Friedman and Ozawa-Flynn-Wall isoconversional methods", Journal of Thermal Analysis and Calorimetry, 2013. 20 words — < 1%
Crossref
-
- 19 ortus.rtu.lv 20 words — < 1%
Internet
-
- 20 Sharara, Mahmoud A., Sammy S. Sadaka, Thomas A. Costello, Karl VanDevender, Julie Carrier, Michael Popp, Greg Thoma, and Angele Djioleu. "Combustion kinetics of swine manure and algal solids", Journal of Thermal Analysis and Calorimetry, 2015. 19 words — < 1%
Crossref
-
- 21 Zhu, Guangyong, Xian Zhu, Zuobing Xiao, Rujun Zhou, and Fengping Yi. "Pyrolysis characteristics of bean dregs and in situ visualization of pyrolysis transformation", Waste Management, 2012. 19 words — < 1%
Crossref

- 23 Saad A. El-Sayed, Amro A. El-baz, Emad H. Noseir. "Sesame and broad bean plant residue: thermogravimetric investigation and devolatilization kinetics analysis during the decomposition in an inert atmosphere", Journal of the Brazilian Society of Mechanical Sciences and Engineering, 2018 16 words — < 1%
Crossref

- 24 Feng, Yuezhan, Bo Wang, Fangfang Wang, Yuanxu Zhao, Chuntai Liu, Jingbo Chen, and Changyu Shen. "Thermal degradation mechanism and kinetics of polycarbonate/silica nanocomposites", Polymer Degradation and Stability, 2014. 15 words — < 1%
Crossref

- 25 Qiang Song, Hongyu Zhao, Qingxiang Ma, Li Yang, Li Ma, Yan Wu, Peng Zhang. "Catalytic upgrading of coal volatiles with Fe₂O₃ and hematite by TG-FTIR and Py-GC/MS", Fuel, 2022 15 words — < 1%
Crossref

- 26 R. R. Dirgarini Julia Nurlianti Subagyono, Wardina Masdalifa, Siti Aminah, Rudy Agung Nugroho et al. " Kinetic Study of Copyrolysis of the Green Microalgae and Victorian Brown Coal by Thermogravimetric Analysis ", ACS Omega, 2021 14 words — < 1%
Crossref

- 27 Tao Kan, Vladimir Strezov, Tim Evans. "Effect of the Heating Rate on the Thermochemical Behavior and Biofuel Properties of Sewage Sludge Pyrolysis", Energy & Fuels, 2016 13 words — < 1%
Crossref

- 28 www.tandfonline.com 13 words — < 1%
Internet
-
- 29 Goutam Kishore Gupta, Monoj Kumar Mondal. "Kinetics and thermodynamic analysis of maize cob pyrolysis for its bioenergy potential using thermogravimetric analyzer", Journal of Thermal Analysis and Calorimetry, 2019 12 words — < 1%
Crossref
-
- 30 S. Korichi, F. Mernache, F. Benaouicha, N. Aoudia, A. Amrane, S. Hadji. "Thermal behavior and kinetic modeling of (NH₄)₄UO₂(CO₃)₃ decomposition under non-isothermal conditions", Journal of Radioanalytical and Nuclear Chemistry, 2017 12 words — < 1%
Crossref
-
- 31 dspace.uok.edu.in 12 words — < 1%
Internet
-
- 32 "Physio-Chemical and Thermo-Gravimetric Analysis of Prosopis Juliflora and Fibre-Reinforced Plastic for Gasification Process", International Journal of Recent Technology and Engineering, 2019 11 words — < 1%
Crossref
-
- 33 Chen, Jianbiao, Lin Mu, Hongchao Yin, Xigeng Song, and Aimin Li. "Thermogravimetric analysis and kinetics of the combustion of refining and chemicals wastewater in different oxygen concentrations", Journal of Thermal Analysis and Calorimetry, 2015. 11 words — < 1%
Crossref
-
- 34 Daniel Bemmuyal Passos Santos, Marcos Fábio de Jesus, José Mário Ferreira Júnior, Carlos Augusto de Moraes Pires. "Determination of kinetic parameters 11 words — < 1%

35 Dergipark.Org.Tr 11 words — < 1 %
Internet

36 Mahrima Majid, Bridgid Lai Fui Chin, Zeinab Abbas Jawad, Yee Ho Chai, Man Kee Lam, Suzana Yusup, Kin Wai Cheah. "Particle swarm optimization and global sensitivity analysis for catalytic co-pyrolysis of *Chlorella vulgaris* and plastic waste mixtures", Bioresource Technology, 2021
Crossref

37 bioresources.cnr.ncsu.edu 11 words — < 1 %
Internet

38 docplayer.net 11 words — < 1 %
Internet

39 idr.nitk.ac.in 11 words — < 1 %
Internet

40 Eduardo Cano-Pleite, Mariano Rubio-Rubio, Néstor García-Hernando, Antonio Soria-Verdugo. "Microalgae pyrolysis under isothermal and non-isothermal conditions", Algal Research, 2020
Crossref

41 Md. Azharul Islam, M. Asif, B.H. Hameed. "Pyrolysis kinetics of raw and hydrothermally carbonized Karanj (*Pongamia pinnata*) fruit hulls via thermogravimetric analysis", Bioresource Technology, 2015
Crossref

42 David Onoja Patrick, Suzana Yusup, Noridah B. Osman, Haslinda Zabiri, Yoshimitsu Uemura, 8 words — < 1 %

Muhammad Shahbaz. "Thermogravimetric Kinetics of Catalytic and Non-Catalytic Pyrolytic Conversion of Palm Kernel Shell with Acid-Treated Coal Bottom Ash", BioEnergy Research, 2020

[Crossref](#)

- 43
- Hammad Siddiqi, Subrata Biswas, Usha Kumari, V.N.V. Hima Bindu, Subhrajit Mukherjee, B.C. Meikap. "A comprehensive insight into devolatilization thermo-kinetics for an agricultural residue: Towards a cleaner and sustainable energy", Journal of Cleaner Production, 2021
- 6 words — < 1%

[Crossref](#)

EXCLUDE QUOTES OFF
EXCLUDE BIBLIOGRAPHY ON

EXCLUDE MATCHES OFF