


[HOME](#) [ABOUT](#) [LOGIN](#) [REGISTER](#) [SEARCH](#) [CURRENT](#) [ARCHIVES](#) [ANNOUNCEMENTS](#) [EDITORIAL TEAM](#) [EDITORIAL POLICIES](#)
REGISTER**PUBLICATION ETHICS****OPEN ACCESS POLICY****PEER-REVIEW****REVIEWERS****FORM OF STATEMENT****JOURNAL STATISTICS****MANUSCRIPT STATISTICS****AUTHOR FEE****KEYWORDS**

Aceh Adsorbent BET BSLT c.
cavignacii Chitoolytic actinobacteria HAPS
long Bales Fort M. brunneum
Mikronukleotid TiO₂-anatas XRF
anthocyanin characteristics chitoolytic index
compressive strength isolation katalis
lactic acid bacteria restoration tofu liquid
waste

**INFORMATION**

- For Readers
- For Authors
- For Librarians

JOURNAL CONTENT

| | |
|---------------------------------------|------------------------------------|
| Search | <input type="text"/> |
| Search Scope | <input type="button" value="All"/> |
| <input type="button" value="Search"/> | |

- Browse
- By Issue
- By Author
- By Title
- Other Journals

[Home](#) > [Vol 7, No 2 \(2021\)](#) > [Jamilatun](#)

A Pyrolysis of 80 Mesh Spirulina platensis Residue (SPR) With Fe₃O₄ Catalyst

Siti Jamilatun, Lukhi Mulia Shitophyta, Heidy Oktavia Nisa, Mutia Endar Nurhidayah

Abstract

Abstract: *Spirulina platensis* Residue (SPR) is obtained from the solid residue of *Spirulina platensis* extraction, which has high carbohydrate and protein content. Pyrolysis technology will convert SPR into a bio-oil, water phase, char, and gas (CO, CO₂, H₂, CH₄) product with the potential as an environmentally friendly and sustainable fuel. This study aims to obtain data on the optimum conditions and product yield composition of SPR catalytic pyrolysis using the in-situ method. Pyrolysis occurs in a fixed-bed reactor with SPR 50 g feed and Fe₃O₄ catalyst (2.5 g and 5 g) at temperature variations of 300-600 °C with an average heating rate of 14.07 °C/min. The higher the pyrolysis temperature, the more bio-oil yield, the optimum at a temperature of 500 °C. The use of 2.5 and 5-gram catalysts obtained bio-oil yields of 25.01 and 17.67 %. The yield of biochar will be lower with increasing pyrolysis temperature. The optimum condition for the gas production was achieved at 300 °C, using a catalyst of 2.5 and 5 grams, the yield of gas was 23.59, and 19.74 %. Moreover, the smaller the specific gravity and the higher the bio-oils pH, the better it is as a vehicle fuel.

Abstrak: *Spirulina platensis* Residu (SPR) diperoleh dari residu pada ekstraksi *Spirulina platensis* yang memiliki kandungan karbohidrat dan protein tinggi. Teknologi pirolisis akan mengubah SPR menjadi produk *bio-oil* yang berpotensi sebagai bahan bakar ramah lingkungan dan berkelanjutan. Penelitian ini bertujuan untuk mendapatkan data kondisi optimum dan komposisi *yield* produk dari pirolisis katalitik SPR dengan metode *in-situ*. Pirolisis SPR akan menghasilkan produk berupa *bio-oil*, *water phase*, *char* dan gas (CO, CO₂, H₂, CH₄). Pirolisis berlangsung dalam reaktor *fixed-bed* dengan umpan SPR 50 g serta katalis Fe₃O₄ (2.5 g dan 5 g) pada variasi suhu 300-600°C dengan *heating rate* rata-rata 14,07 °C/min. Semakin tinggi suhu pirolisis semakin banyak *yield bio-oil*, optimum pada suhu 500 °C. Pemakaian katalis 2,5 dan 5 gram diperoleh *yield bio-oil* sebanyak 25,01 dan 17,67 %. *Yield biochar* akan semakin rendah dengan kenaikan suhu pirolisis. Kondisi optimum produk gas dicapai pada 300 °C dengan katalis 2,5 dan 5 gram diperoleh *yield* gas sebesar 23,59, dan 19,74 %. Hal tersebut mengakibatkan, semakin kecil berat jenis dan semakin tinggi pH *bio-oil* maka semakin baik sebagai bahan bakar kendaraan.

Keywords

Spirulina platensis residue; pyrolysis; fixed-bed reactor; bio-oil; Fe₃O₄

Full Text:

[PDF](#)

References

- Budiardi T, Utomo NBP, Santosa A. (2010). Pertumbuhan dan kandungan nutrisi *Spirulina* sp. pada photoperiod yang berbeda. *Jurnal Akuakultur Indonesia*. 9(2): 146-156.
- Chutia RS, Kataki R, Bhaskar T. (2014). Characterization of liquid and solid product from pyrolysis of *Pongamia glabra* deoiled cake. *Bioresour Technol* 165:336–342
- Chen, W.H., Lin, B.-J., Huang, M.-Y. & Chang, J.-S. (2015). Thermochemical conversion of microalgal biomass into biofuels: A review. *Bioresour. Technol.*, 184, 314–327.
- Chaiwong K, Kiatsiriroat T. (2015). Characterizations of bio-oil and bio-char products from algae with slow and fast pyrolysis. *Int J Environ Bioenergy*. 10:65–76.
- Debowski, M., Zielinski, M., Grala, A., Dudek, M. (2014). Algae biomass as an alternative substrate in biogas production technologies-Review. *Renew. Sustain. Energy Rev.* 27, 596e604
- Gultom, S. O., Zamalloa, C., & Hu, B. (2014). Microalgae Harvest through Fungal Pelletization—Co-Culture of *Chlorella Vulgaris* and *Aspergillus niger*. *Energies*, 7(7), 4417–4429. Basu, P., 2010. Biomass Characteristics. *Biomass Gasification Design Handbook*, 27–63.
- Jamilatun, S., Budhijanto, Rochmadi, Yuliestyan, A. and Budiman, A., (2019a), Valuable Chemicals Derived from Pyrolysis Liquid Products of *Spirulina platensis* residue, *Indones. J. Chem.*, 19 (3), 703 – 711.
- Jamilatun, Budhijanto, Rochmadi, A. Yuliestyan, H. Hadiyanto, and A. Budiman, (2019b), Comparative analysis between pyrolysis products of *Spirulina platensis* biomass and its residues, *Int. J. Renew. Energy Dev.*, vol. 8, no. 2, pp. 133–140.
- Jamilatun, S., Budhijanto, Rochmadi, Yuliestyan, A., A., (2019c), Effect of grain size, temperature, and catalyst on characteristics of pyrolysis products from *Spirulina platensis* residue (SPR), *International Journal of Technology* 10 (3), 541-550.
- Jamilatun, S., Budiman, A., Anggorowati, H. Yuliestyan, A. Surya Pradana, Y. Budhijanto, and Rochmadi, (2019d), Ex-Situ Catalytic Upgrading of *Spirulina platensis* residue oil using silica-alumina catalyst, *Int. J. Renew. Energy Res.* Vol. 9, No. 4, pp. 1733–1740.
- Jamilatun, S., Mufandi, I., Evitasari R.T. and Budiman, A. (2020), Effects of temperature and catalysts on the yield of bio-oil during the pyrolysis of *Spirulina platensis* residue, *International Journal of Renewable Energy Research*, 2020, 10(2), pp. 678-686.
- Payormhorm, J., Kangvansaijoch, K., Reubroycharoen, P., Kuchonthara, P., Hinchtan, N. 2013. Pt/Al2O3-catalytic deoxygenation for the upgrading of *Leucaena leucocephala*-pyrolysis oil. *Bioresource Technology*.139.128-135.
- Scott, S.A., Davey, M.P., Dennis, J.S., Horst, I., Howe, C.J., Lea-Smith, D.J., and Smith, A.G. 2010. Biodiesel from algae: challenges and prospects. *Current Opinion in Biotechnology*, 21, 227–286.
- Shen, Y., and Yoshikawa, K. (2013). Recent progress in catalytic tar elimination during biomass gasification or pyrolysis—A review. *Renewable and Sustainable Energy Reviews* 21 (2013) 371–392.
- Verma, N.H., Mehrotra, S., Amitesh Shukla, A., and Mishra, B.N. (2010). Prospective of biodiesel production utilizing microalgae as the cell factories: A comprehensive discussion. *African Journal of Biotechnology*. 9 (10): 1402–1411.
- Yu, Z., Dai, M., Huang, M., Fang, S., Xu, J., Lin, Y., and Ma, X. (2018). Catalytic characteristics of the fast pyrolysis of microalgae over oil shale: analytical Py-GC/MS study. *Renew. Energy*, 125, 465–471.
- Yang, C., Li, R., Zhang, B., Qiu, Q., Wang, B., Yang, H., Ding, Y., and Wang, C. (2019). Pyrolysis of microalgae: A critical review. *Fuel Processing Technology*, 186, 53–72.
- Zang, L., Bao, Z., Xia, Z., Lu, Q., and Walters, K.B. (2018). Catalytic Pyrolysis of Biomass Polymer Wastes, *Catalysts*, 8, 659, 1-24.

DOI: <http://dx.doi.org/10.22373/ekw.v7i2.8950>


P.ISSN : 2460-8912
E.ISSN : 2460-8920
Accredited by Kemenristek - DIKTI
No. 28/E/KPT/2019
Vol. 5 No.1, 2019 - Vol 9 No.1,2023

EDITORIAL TEAM

USER

 Username

 Password
 Remember me

ABOUT THE AUTHORS

Siti Jamilatun
Department of Chemical Engineering,
Universitas Ahmad Dahlan, Yogyakarta
Indonesia

Department of Chemical Engineering

Lukhi Mulia Shitophyta
Department of Chemical Engineering,
Universitas Ahmad Dahlan, Yogyakarta
Indonesia

Department of Chemical Engineering

Heidy Oktavia Nisa
Department of Chemical Engineering,
Universitas Ahmad Dahlan, Yogyakarta
Indonesia

Department Of Chemical Engineering

Mutia Endar Nurhidayah
Department of Chemical Engineering,
Universitas Ahmad Dahlan, Yogyakarta
Indonesia

Department of Chemical engineering



Reference Manager by:

Plagiarism Checker by:

Indexed by :



| | |
|------------|--------|
| Online | 3 |
| Vis. today | 46 |
| Visits | 87 408 |
| Pag. today | 132 |

NOTIFICATIONS

- View
- Subscribe

Refbacks

- There are currently no refbacks.

Copyright (c) 2021 Siti Jamilatun, Lukhi Mulia Shitophyta, Heidy Oktavia Nisa, Mutia Endar Nurhidayah



This work is licensed under a [Creative Commons Attribution-ShareAlike 4.0 International License](#).

P-ISSN : [2460-8912](#)

E-ISSN : [2460-8920](#)

ELKAWNIE



This work is licensed under a [Creative Commons Attribution-ShareAlike 4.0 International License](#).

Elkawnie: Journal of Islamic Science and Technology in 2020. Published by Faculty of Science and Technology in cooperation with Center for Research and Community Service (LP2M), UIN Ar-Raniry Banda Aceh, Aceh, Indonesia.

[00274142](#)

[View full page view stats report click here](#)

Visitors

| | | | |
|--|---------|--|-----|
| | 101,120 | | 296 |
| | 4,506 | | 193 |
| | 1,620 | | 137 |
| | 617 | | 130 |
| | 334 | | 122 |

FLAGcounter



P.ISSN : 2460-8912
E.ISSN : 2460-8920

Accredited by Kemenristek - DIKTI
No. 28/E/KPT/2019
Vol. 5 No.1, 2019 - Vol 9 No.1,2023

[REGISTER](#)[PUBLICATION ETHICS](#)[OPEN ACCESS POLICY](#)[PEER-REVIEW](#)[REVIEWERS](#)[FORM OF STATEMENT](#)[JOURNAL STATISTICS](#)[MANUSCRIPT STATISTICS](#)[AUTHOR FEE](#)**KEYWORDS**

Aceh Adsorbent BET BSLT c.
curvignathus Chitinolytic adinobacteria HAPS
long Baleo Fort M. brunneum
Mikrokontroler TiO2-anatase XRF
anthocyanin characteristics chitinolytic index
compressive strength isolation katalis
lactic acid bacteria restoration tofu liquid waste

**INFORMATION**

- For Readers
- For Authors
- For Librarians

JOURNAL CONTENT

| | |
|---------------------------------------|------------------------------------|
| Search | <input type="text"/> |
| Search Scope | <input type="button" value="All"/> |
| <input type="button" value="Search"/> | |

- Browse
- By Issue
- By Author
- By Title
- Other Journals

[Home > About the Journal > Editorial Team](#)

Editorial Team

ADVISOR

Hendri Ahmadian, (SINTA ID: 6003098) Department of Information Technology, Universitas Islam Negeri Ar-Raniry Banda Aceh, Indonesia

EDITOR IN CHIEF

Muhammad Ridwan Harahap, (Scopus ID: 57443545800) Department of Chemistry, Faculty of Science and Technology, Universitas Islam Negeri Ar-Raniry, Banda Aceh, Indonesia

MANAGING EDITOR

Abd Mujahid Hamdan, (Scopus ID: 57205452806) Department of Environmental Engineering, Universitas Islam Negeri Ar Raniry Banda Aceh, Aceh, Indonesia

SECTION EDITORS

Ghufran Ibnu Yasa, Department of Information Technology, Universitas Islam Negeri Ar-Raniry, Banda Aceh, Aceh, Indonesia
 Cut Nuzlia, (Scopus ID: 55711333200) Organic Chemistry, Department of Chemistry, State Islamic University of Ar-Raniry
 Arif Sardi, Department of Biology, State Islamic University of Ar-Raniry, Banda Aceh, Indonesia, Indonesia
 Fatihul Mahdariza, (Scopus ID: 56545835300) Department of Aquatic Environmental Engineering, Karlsruhe Institute of Technology, Germany
 Bustami Yusuf, Department of Information Technology, Faculty Science and Technology, Universitas Islam Negeri Ar-Raniry, Banda Aceh, Aceh, Indonesia
 Zya Dyena Meutia, (Scopus ID : 57194827662), Department of Architecture, Faculty of Sciences and Technology, State Islamic University of Ar Raniry, Indonesia
 Ima Dwitawati, Department of Information technology, Universitas Islam Negeri Ar-Raniry, Banda Aceh, Aceh, Indonesia
 Husnawati Yahya, Department of Environmental Engineering, Universitas Islam Negeri Ar-Raniry, Banda Aceh, Aceh, Indonesia
 Hadi Kurniawan, Department of Physics Engineering, State Islamic University of Ar-Raniry, Banda Aceh Indonesia, Indonesia

INTERNATIONAL EDITORIAL BOARDS

Kuwat Triyana, (Scopus ID: 8597558700, H-Index: 11) Department of Physics, Faculty of Mathematics and Natural Sciences, Universitas Gadjah Mada (UGM), Indonesia
 Mustanir Yahya, (Scopus ID: 57210705476, H-Index: 8) Department of Chemistry, Syiah Kuala University, Indonesia
 Renjith Thomas, (Scopus ID: 55481779800, H-Index: 12) Department of Chemistry, St Berchmans College, Mahatma Gandhi University, Changanassery, Kerala, India
 Saluma Samanman, Scopus ID: 41662125300, H-Index: 7) Faculty of Science and Technology, Princess of Naradhiwas University, Narathiwat, Thailand
 Saharman Gea, (Scopus ID: 23004491900, H-Index: 9) Department of Chemistry, Universitas Sumatera Utara, Indonesia
 Anurita Selvarajoo, (Scopus ID: 56941851700, H-Index: 4) Department of Chemical and Environmental Engineering, Faculty of Science and Engineering, University of Nottingham, Malaysia
 Adri Huda, (Scopus ID: 57195939115, H-Index: 6) Environmental Engineering, UNESP-Universidade Estadual Paulista, Sao Paulo, Brazil, Brazil
 Nayeem Asif, (Scopus ID: 56800474400, H-Index: 2) Department of Architecture, Kulliyyah of Architecture and Environmental Design, International Islamic University Malaysia, Malaysia
 Reisya Ichwani, (Scopus ID: 57205114974, H-Index: 2) Worcester Polytechnic Institute, Worcester, Massachusetts, United States, United States
 Zahidah binti Zulkiflii, (Scopus ID: 571933372860) Kulliyyah of Information and Communication Technology, International Islamic University Malaysia, Malaysia
 Brij Mohan Uperti, (Scopus ID: 55962671000, H-Index: 2) Jayoti Vidyapeeth Women's University Jaipur, Rajasthan, India
 Mohamed Alaa Mandour, (Scopus ID: 36932863000) Department of Architecture, Helwan University, Cairo, Egypt
 Mohammad Arif Kamal, (Scopus ID: 56921383300) Architecture Section, Aligarh Muslim University, India
 Lidervan de Paula Melo, (Scopus ID: 12141546800, H-index: 6) Analytical Chemistry, Universidade do Estado de Minas Gerais (UEMG), Ubá, MG., Brazil

LAYOUT EDITOR

Nasrullah Nasrullah, State Islamic University of Ar-Raniry, Banda Aceh, Indonesia

WEB AND OJS MANAGER

Saiful Hadi, State Islamic University of Ar-Raniry

PROOFREADERS

Nanda Syahputra, Faculty of Science and Technology, State Islamic University of Ar Raniry, Indonesia

ADMINISTRATION OFFICER

Teuku Ade Vidyan Maqfirah, Official library Faculty of Science dan Technology State Islamic University of Ar-Raniry, Indonesia

P-ISSN : 2460-8912

E-ISSN : 2460-8920

ELKAWNIE



This work is licensed under a Creative Commons Attribution-ShareAlike 4.0 International License.

Elkawnie: Journal of Islamic Science and Technology in 2020. Published by Faculty of Science and Technology in cooperation with Center for Research and Community Service (LP2M), UIN Ar-Raniry Banda Aceh, Aceh, Indonesia.

00274144

View full page view stats report [click here](#)

Visitors

| | |
|---|---|
|  101,120 |  296 |
|  4,506 |  193 |
|  1,620 |  137 |
|  617 |  130 |
|  334 |  122 |

**USER**

Username

Password

Remember me



Reference Manager by:
MENDELEY

Plagiarism Checker by:
turnitin

Indexed by:
grammarly

sinta S2

EBSCO INFORMATION SERVICES

Google scholar

publons

Crossref

indonesia OneSearch

ROAD DIRECTORY OF OPEN ACCESS RESOURCES

MORAREF

GARUDA GARDA RISERUJAN DIGITAL

INDEX COPERNICUS INTERNATIONAL

BASE

| | |
|------------|--------|
| Online | 2 |
| Vis. today | 46 |
| Visits | 87,408 |
| Pag. today | 133 |

NOTIFICATIONS

[View](#)

[Subscribe](#)

**REGISTER****PUBLICATION ETHICS****OPEN ACCESS POLICY****PEER-REVIEW****REVIEWERS****FORM OF STATEMENT****JOURNAL STATISTICS****MANUSCRIPT STATISTICS****AUTHOR FEE****KEYWORDS**

Aceh Adsorbent BET BSLT c.
curvигrathus Chitinolytic actinobacteria HAPS
 long Balee Fort M. brunneum
 Mikrokontroler TiO₂-anatase XRF
 anthocyanin characteristics chitinolytic index
 compressive strength isolation katalis
 lactic acid bacteria restoration tofu liquid
 waste

**INFORMATION**

- For Readers
- For Authors
- For Librarians

JOURNAL CONTENT

Search
 Search Scope

- Browse
- By Issue
- By Author
- By Title
- Other Journals

[Home](#) > [Archives](#) > [Vol 7, No 2 \(2021\)](#)
Vol 7, No 2 (2021)**Full Issue**
[View or download the full issue](#)
[FRONT MATTER](#) [BACK MATTER](#)
Table of Contents**Articles**

Preparation and Characterization of Giant Tiger Shrimp (*Penaeus monodon*) Shell-Based Chitin as Biocoagulant For Water Purification [PDF](#) 215-224

[10.22373/ekw.v7i2.8229](#)

Khairun Nisah, Rizna Rahmi

Tracking The Source of Antimicrobial Production From House Fly (*Musca domestica*): Right-Wing of Fly Or Gut System? - A Mini-Review [PDF](#) 225-238

[10.22373/ekw.v7i2.9495](#)

Muhammad Asril, Ika Agus Rini, Indah Oktaviani, Mushaliyah Mushaliyah

Perception Analysis of Green Construction Implementation on Construction Projects For Contractors in Banda Aceh City [PDF](#) 239-251

[10.22373/ekw.v7i2.7477](#)

Anita Rauzana, Nurul Hidayati Binti Saidan, Wira Dharma

A Pyrolysis of 80 Mesh *Spirulina platensis* Residue (SPR) With Fe₃O₄ Catalyst [PDF](#) 252-262

[10.22373/ekw.v7i2.8950](#)

Siti Jamilatun, Lukhi Mulia Shitophyta, Heidy Oktavia Nisa, Mutia Endar Nurhidayah

Similarity Analysis of User Trajectories Based on Haversine Distance and Needleman Wunsch Algorithm [PDF](#) 263-276

[10.22373/ekw.v7i2.9232](#)

Mohammad Jamhuri, Mohammad Isa Irawan, Imam Mukhlash

Effectiveness Bleaching of Waste Cooking Oil Cleaning Using Nano-Montmorillonite Adsorbent [PDF](#) 277-287

[10.22373/ekw.v7i2.9252](#)

Silvia Ningsih, Puji Wahyuningsih, Tisna Harmawan

Climate-Responsiveness Embodied in Modern Mosque Design [PDF](#) 288-299

[10.22373/ekw.v7i2.9138](#)

Era Nopera Rauzi, Izziah Hasan, Laina Hilma Sari

The Effect of Lemon (*Citrus limon*) Extracts On The Quantity and Quality of Mice (*Mus musculus*) Sperm [PDF](#) 300-316

[10.22373/ekw.v7i2.9389](#)

Vitaloka Guci Rahayu, Evi Hanizar

Immunodetection of Adhesin Pili Protein 38.6 kDa *K. pneumoniae* Using Western Blot [PDF](#) 317-327

[10.22373/ekw.v7i2.10127](#)

Dini Agustina, Diana Chusna Mufida, Nurul Indah Saffanah

The Application of Goat Bone Waste Activated Charcoal As Manganese Heavy Metal Absorbent in Borehole Water [PDF](#) 328-340

[10.22373/ekw.v7i2.9586](#)

Sari Wardani, Savitri Savitri, Firda Mawardah, Muhammad Adham, Lindawati Lindawati

The Type Fragmentation Patterns Confirmed Acetaminophen By Using Liquid Chromatography-Mass Spectrometry (LCMS) From Herbal Medicine (Jamu) [PDF](#) 341-353

[10.22373/ekw.v7i2.7492](#)

Muhammad Taupik, Endah Nurrohwita Djuwarno, Moh Adam Mustapa, Wiwin R Kunusa, Jafar La Kilo, Muhamad Handoyo Sahumena

Geothermal Distribution Analysis of Geureudong Volcano Based On Satellite Data and Fault Fracture Density (FFD) [PDF](#) 354-367

[10.22373/ekw.v7i2.9728](#)

Muhammad Isa, Zulfadhliz Zulfadhliz, Cut Fat Thahul, Dwiky Pobri Cesarian

The Alternative of Drainage Construction Technology Selection by Using Analytical Hierarchy Process Method [PDF](#) 368-381

[10.22373/ekw.v7i2.9880](#)

Hafnidar A Rani, Tamalkhani Syammaun, Aulina Adamy, Ari Fadillah

Digital Trail Awareness in Islamic Perspective [PDF](#) 382-394

[10.22373/ekw.v7i2.11706](#)

Gunawan Adnan, Mulkan Fadhli, Farid Fathony Ashal

Effects of Dietary Caulerpa lentillifera Supplementation On Growth Performance and Survival Rate of Milk Fish, *Chanos chanos* (Forsskål, 1775) [PDF](#) 395-407

[10.22373/ekw.v7i2.10484](#)

Dedi Fazriansyah Putra, Muhammadar Abdullah Abbas, Nadri Solin, Norhayati Othman

USER

Username

Password

Remember me



Reference Manager by:
MENDELEY

Plagiarism Checker by:
turnitin

Indexed by:
sinta

EBSCO
INFORMATION SERVICES

Google scholar

publons

Crossref

indonesia OneSearch

ROAD DIRECTORY OF OPEN ACCESS
RESOURCES

MORAREF

GARUDA GARDA RISERUKAN DIGITAL

INDEX COPERNICUS INTERNATIONA

BASE

Vis. today 46
Visits 87 408
Pag. today 137
Pages 274 115

NOTIFICATIONS

- [►View](#)
- [►Subscribe](#)

P-ISSN : 2460-8912
E-ISSN : 2460-8920

ELKAWNIE



This work is licensed under a [Creative Commons Attribution-ShareAlike 4.0 International License](#).

Elkawnie: Journal of Islamic Science and Technology in 2020. Published by Faculty of Science and Technology in cooperation with Center for Research and Community Service (LP2M), UIN Ar-Raniry Banda Aceh, Aceh, Indonesia.

00274148

View full page view stats report [click here](#)

Visitors

| | | | |
|--|---------|--|-----|
| | 101,120 | | 296 |
| | 4,506 | | 193 |
| | 1,620 | | 137 |
| | 617 | | 130 |
| | 334 | | 122 |

FLAGcounter

A PYROLYSIS OF 80 MESH *Spirulina platensis* RESIDUE (SPR) WITH Fe_3O_4 CATALYST

Siti Jamilatun*, Lukhi Mulia Shitophyta*, Heidy Oktavia Nisa*, Mutia Endar Nurhidayah*

*Department of Chemical Engineering, Universitas Ahmad Dahlan, Yogyakarta, Indonesia,
sitijamilatun@che.uad.ac.id, lukhi.mulia@che.uad.ac.id, heidy1700020050@webmail.uad.ac.id,
mutia1700020054@webmail.uad.ac.id

Email Correspondence : sitijamilatun@che.uad.ac.id

Received : February 12, 2021

Accepted : May 5, 2021

Published : December 31, 2021

Abstract: *Spirulina platensis* Residue (SPR) is obtained from the solid residue of *Spirulina platensis* extraction, which has high carbohydrate and protein content. Pyrolysis technology will convert SPR into a bio-oil, water phase, char, and gas (CO, CO₂, H₂, CH₄) product with the potential as an environmentally friendly and sustainable fuel. This study aims to obtain data on the optimum conditions and product yield composition of SPR catalytic pyrolysis using the in-situ method. Pyrolysis occurs in a fixed-bed reactor with SPR 50 g feed and Fe₃O₄ catalyst (2.5 g and 5 g) at temperature variations of 300-600 °C with an average heating rate of 14.07 °C/min. The higher the pyrolysis temperature, the more bio-oil yield, the optimum at a temperature of 500 °C. The use of 2.5 and 5 gram catalysts obtained bio-oil yields of 25.01 and 17.67 %. The yield of biochar will be lower with increasing pyrolysis temperature. The optimum condition for the gas production was achieved at 300 °C, using a catalyst of 2.5 and 5 grams, the yield of gas was 23.59, and 19.74 %. Moreover, the smaller the specific gravity and the higher the bio-oils pH, the better it is as a vehicle fuel.

Keywords: *Spirulina platensis* residue; Pyrolysis; Fixed-bed reactor; Bio-oil; Fe₃O₄

Abstrak: Residu *Spirulina platensis* (SPR) diperoleh dari residu padat ekstraksi *Spirulina platensis* yang memiliki kandungan karbohidrat dan protein tinggi. Teknologi pirolisis akan mengubah SPR menjadi produk bio-oil yang berpotensi sebagai bahan bakar ramah lingkungan dan berkelanjutan. Penelitian ini bertujuan untuk mendapatkan data kondisi optimum dan komposisi *yield* produk dari pirolisis katalitik SPR dengan metode in-situ. Pirolisis SPR akan menghasilkan produk berupa bio-oil, *water phase*, char dan gas (CO, CO₂, H₂, CH₄). Pirolisis berlangsung dalam reaktor *fixed-bed* dengan umpan SPR 50 g serta katalis Fe₃O₄ (2.5 g dan 5 g) pada variasi suhu 300-600°C dengan *heating rate* rata-rata 14,07 °C/min. Semakin tinggi suhu pirolisis semakin banyak *yield* bio-oil, optimum pada suhu 500 °C. Pemakaian katalis 2,5 dan 5 gram diperoleh *yield* bio-oil sebanyak 25,01 dan 17,67 %. *Yield* biochar akan semakin rendah dengan kenaikan suhu pirolisis. Kondisi optimum produk gas dicapai pada 300 °C dengan katalis 2,5 dan 5 gram diperoleh *yield* gas sebesar 23,59 dan 19,74 %. Tambahan lagi, semakin kecil berat jenis dan semakin tinggi pH bio-oil maka semakin baik sebagai bahan bakar kendaraan.

Kata kunci: *Spirulina platensis* residue; Pirolisis; Reaktor *fixed-bed*; Bio-oil; Fe₃O₄

Recommended APA Citation :

Jamilatun, S., Shitophyta, L. M., Nisa, H. O., & Nurhidayah, M. E. (2021). A Pyrolysis of 80 Mesh *Spirulina platensis* Residue (SPR) With Fe₃O₄ Catalyst. *Elkawnie*, 7(2), 252-262. <https://doi.org/10.22373/ekw.v7i2.8950>

Introduction

Biomass is a renewable energy source that is abundant throughout the world. One of the potential biomass alternatives to substitute for fossil fuels is microalgae (Budiardi et al., 2010; Gultom et al., 2014; Jamilatun et al., 2020). Some of the benefits of microalgae development have been summarized by Verma et al. (2010) are (i) having a simple cell structure, (ii) the ability to control cells without reducing their productivity, (iii) converting about 3-8 % of sunlight into energy (other plants are only about 0.5 %), (iv) a short microalgae life cycle of 1-10 days, (v) very high-fat synthesis (\pm 40-86 % dry weight of biomass), (vi) the ability to survive microalgae in extreme environmental conditions (high salinity or polluted environment) is perfect, (vii) requires low nutrients and fertilizers, (viii) does not compete with foodstuffs, and (ix) reduces CO₂ in the air due to photosynthesis of microalgae.

Many studies have converted biomass from microalgae into biodiesel energy (Scott et al., 2010), biofuels, and biogas (Debowski et al., 2014). However, the solid residue from microalgae extraction has not been utilized properly. Based on various reliable biomass characterization studies, the study results state that this residue can be used as raw material for pyrolysis, which will produce products in the form of bio-oil, water phase, charcoal, and gas. The addition of product value to bio-oil and gas is estimated to support the world's energy supply by \pm 14 % (Shen et al., 2013).

Spirulina platensis residue (SPR) is a solid residue from the *Spirulina platensis* algae extraction (Jamilatun et al., 2019a). The fat content at low SPR is around 0.01 wt.% with high carbohydrate (38.51 wt.%) and protein (49.60 wt.%) content. The composition is feasible as a raw material for pyrolysis; the high carbohydrate content is very beneficial because it can optimize bio-oil products' yield (Chen et al., 2015; Jamilatun et al., 2019b). SPR processing by pyrolysis is considered more economical because it can carry out the process at atmospheric pressure and does not require other additives. Biofuel produced from the pyrolysis process consists of bio-oil, water phase, char, and gas. According to Jamilatun et al., 2019d, SPR has a low nitrogen compound content, making it easier for bio-oil to achieve stability in its use (Jamilatun et al., 2019c).

Bio-oil produced from SPR pyrolysis still contains high oxygenate compounds; one solution to this is the use of catalysts in pyrolysis. The use of a silica-alumina catalyst can reduce oxygenated compounds by as much as 65.8 % (Jamilatun et al., 2019c). The use of Fe catalyst in ZSM-5 improves the quality of pyrolysis products compared to non-catalytic pyrolysis. The catalyst can increase oxygen reduction, further promoting the desired products such as phenolics and

aromatic compounds. The catalyst composition, which Fe dominates around 56 %, can improve bio-oil products' conversion and quality. Metal-modified catalysts can increase monocyclic aromatic hydrocarbon (MAH) products. In comparison, they reduce the formation of polycyclic aromatic hydrocarbons (PAH) (Zang et al., 2018).

This study carried out pyrolysis with Fe_3O_4 catalyst to determine the product yield with a 2.5 and 5 grams catalyst, SPR 50 grams. The explanation above is necessary to use SPR using pyrolysis technology to increase its economic value. This research will conduct characterization of product yield and obtain the optimum conditions for bio-oil production from SPR.

Materials and Methods

Materials

Spirulina platensis residue solid with the enrichment of 80 mesh in this study obtained from waste extraction *Spirulina platensis* (SP) and catalyst Fe_3O_4 with the number of variations is 2.5 and 5 grams.

Tools

Dry *Spirulina platensis* residue (SPR) was pyrolyzed in a fixed-bed reactor made from stainless steel equipped with a heater outside the reactor; the pyrolysis unit can see in figure 1 (Jamilatun et al., 2019a).

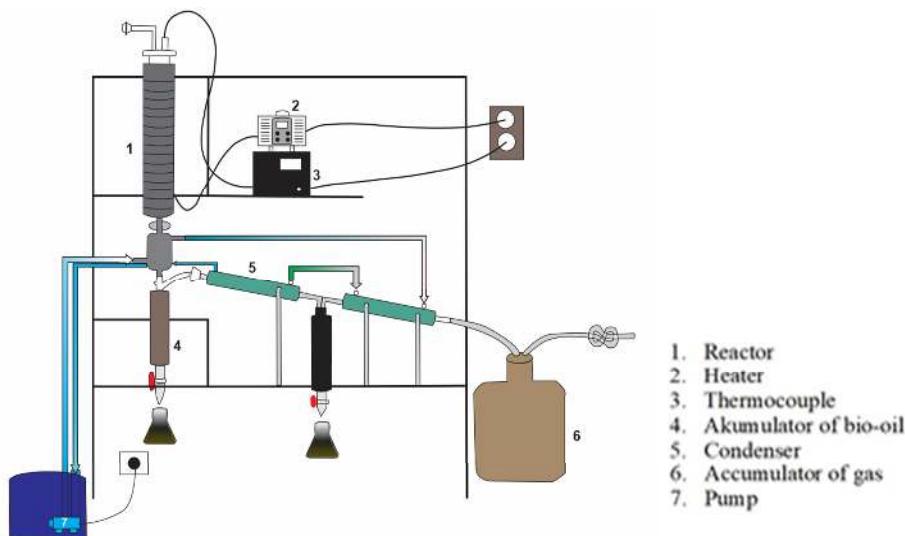


Figure 1. The catalytic pyrolysis equipment (Jamilatun et al., 2019d).

Methods

The material used is dry *Spirulina platensis* residue (SPR) with a size of 80 mesh. The first step to obtaining SPR 80 mesh size is dry SPR cleaned of dirt and mashed, then sieved using a sieving machine and taking SPR with 80 mesh size. Each experiment used a sample of 50 grams with variations of the catalyst Fe_3O_4 .

Results and Discussions

Spirulina platensis residue (SPR) Characteristic

The pyrolysis process is carried out with a fixed bed with the addition of power at each constant temperature shown in figure 2.

Figure 2 shows that the longer the time used to perform the pyrolysis process, the higher its temperature. So, the relationship between time is directly proportional to temperature. The method of retrieving temperature data is every interval of 5 minutes until it reaches the desired temperature.

The effect of time and temperature on the heating rate is shown in figure 3. The heating rate decreased over time, with an average heating rate of 14.07 $^{\circ}\text{C}/\text{min}$.

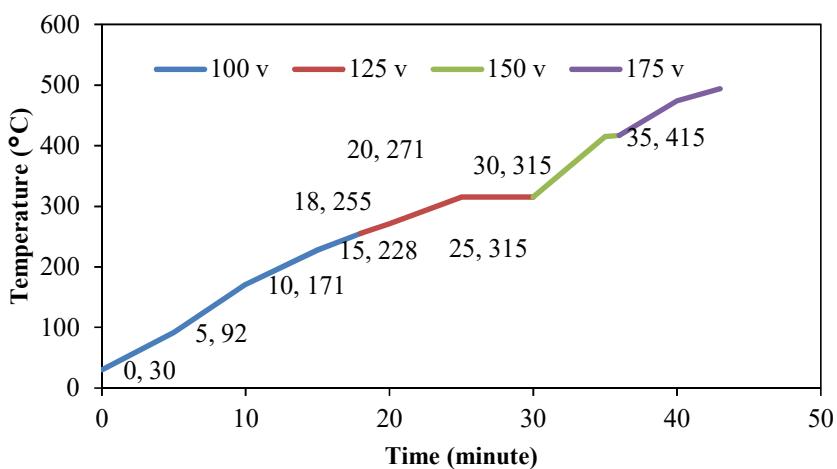


Figure 2. Effect of time on the pyrolysis temperature

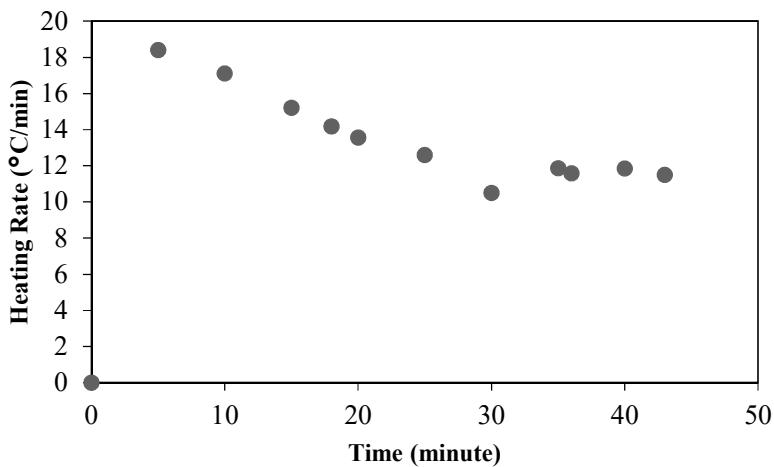


Figure 3. Effect of time on pyrolysis heating rate

Based on figure 3, the longer the time used in the pyrolysis process, the heating rate will decrease because the heating rate is obtained from comparing

temperature and time. However, from the data got there is an increase in the heating rate at the time to 35 minutes; this is due to the administration of voltmeter power that is too high so that from 30 minutes to 35 minutes, there is a high-temperature surge that can lead to unstable heating rate.

Pyrolysis Product

The experiment results with various catalysts (2.5 grams and 5 grams) and temperature variations (300, 400, 500, 550, and 600 °C) are presented in figure 4.

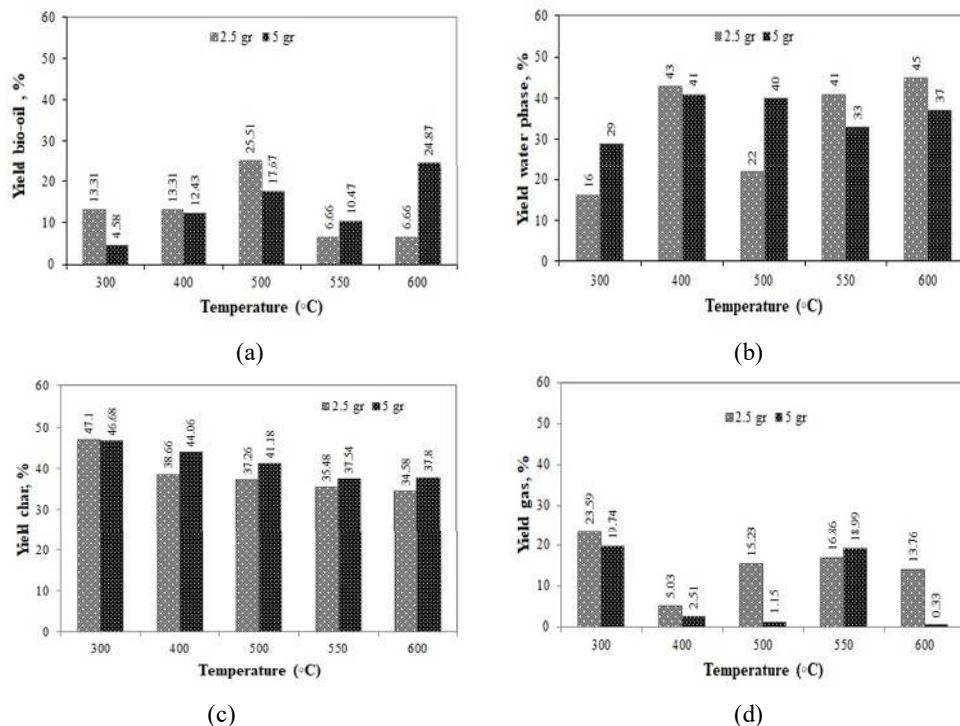


Figure 4. Effect of temperature and number of catalysts on (a) Bio-oil yield (b) Yield bio-char (c) Yield water phase (d) Yield gas.

Based on figure 4 (a), Bio-oil yield with an average heating rate of 14.07 °C/min at catalyst usage of 2.5 gram and temperature set (300, 400, 500, 550, and 600°C) is 13.31, 13.31, 25.51, 6.66, and 6.66 %, and for the use of catalysts 5 gram and the same set of temperatures in a row are 4.58, 12.43, 17.67, 10.47 and 24.87 %. The peak yield of bio-oil produced at 500 °C is 25.01 % with a catalyst of 2.5 grams and at 600°C is 24.87 % for catalysts of 5 grams. The study with a temperature of 600°C got a bio-oil yield of 24.87 % because the biomass used is different from the previous biomass. This biomass may contain more protein, so the bio-oil produced is pretty much equivalent to a bio-oil yield at 500 °C with a catalyst of 2.5 grams. If drawn conclusions based on the same bait, then the maximum bio-oil acquisition at the temperature set of 500 °C for the use of 5 grams of Fe_3O_4 catalyst with the addition of bio-oil yield is 17.67 %. This bio-oil

yield data is similar to Chaiwong's, 2015, pyrolysis *Spirulina sp.* and *Spirogyra sp.* at 500 °C with fixed-bed reactor obtained bio-oil yield 29 and 13 wt.%.

Based on experimental data, there is a tendency to increase bio-oil yield and increase the temperature from 300-500 °C, but at a temperature of 500 to 600 °C, there is a decrease in bio-oil yield. The reduction of bio-oil due to secondary cracking starts at 500 °C, where the tar (a mixture of bio-oil and water phase) formed in the primary cracking will decompose into gas and char so that the weight of the bio-oil will decrease. This study follows Yu et al., 2018, the more the amount of catalyst used, the lower the vegetable oil yield. The secondary cracking phenomenon at high temperatures causes the thermal decomposition speed to be faster so that the bio-oil tends to turn into a gas product.

Figure 4 (b) The water-phase yield on the use of catalysts 2.5 gram and temperature sets (300, 400, 500, 550, and 600°C) are 16, 43, 22, 41, and 45 % in a row. The use of catalysts 5 gram and the same temperature set in a row are 29, 41, 40, 33, and 37 %. Based on figure 4(b), the water phase obtained varies greatly. The yield water phase relies heavily on the material's water content and water formation during the pyrolysis process.

In figure 4 (c), the amount of char yield on the use of catalyst 2.5 gram with temperature set (300, 400, 500, 550, and 600 °C) were 47.1, 38.66, 37.26, 35.48, and 34.58 % while in the use of catalysts 5 gram was 46.68, 44.06, 41.18, 37.54 and 37.8 %. Most of the char is changed at a temperature setting of 300 °C to reach ± 40% of the total product. At a temperature of 300 °C, this is the final dehydration phase in the pyrolysis process, producing a more durable material. It has large amounts of charcoal products (Yang et al., 2019). Based on the results obtained, the optimum conditions for char production are at a temperature of 300 °C with 2.5 grams of catalyst. As the temperature increases, the char yields decrease; according to Chutia et al., 2014 caused by the loss of volatile material or significant secondary decomposition at high temperatures. This secondary decomposition produces a gas that is not condensed, contributing to an increase in gas production. Therefore, at 600 °C, there is very little charcoal product.

Based on figure 4 (d), the amount of syngas yield on the use of catalysts 2.5 gram with temperature sets (300, 400, 500, 550 and 600 °C) were 23.59, 5.03, 15.23, 16.86 and 13.76 and 13.76 % while in the use of catalysts 5 gram was 19.74, 2.51, 1.15, 18.99 and 0.33 %. According to the literature, syngas yields increase with increasing temperatures; this is not the case in this study because the results tend to be volatile. The influence of bio-char weight and bio-oil also plays a role in these varied results. Based on pyrolysis, the obtained yield of syngas at 300 °C with a catalyst of 2.5 gram was 23.59 %, and at the catalyst, it was 5 gram of 19.74 %. From observations on the gas yield curve with catalyst variations of 2.5 gram and 5 gram at temperatures of 300, 400, 500, 550, and 600 °C irregular gas yield because that affects the yield value of gas is liquid and char weight. Increasing the number of catalysts from 2.5 to 5 grams increases the amount of

CO_2 and H_2 formed by the decomposition reaction of oxygenate compounds. The addition of catalysts to the reaction also affects the formation of methane gas (CH_4). Methane gas is formed through a CO_2 or CO reaction with H_2 (Payormhorm, 2013). However, in this study, the results of gas yield obtained from catalysts are 2.5 gram and 5-gram irregular, so it does not correspond to the literature.

Density and pH testing of bio-oil and water phase

Spirulina platensis residue pyrolysis research aims to determine the effect of the amount of catalyst and temperature variations on product yield distribution. 50 gram of *Spirulina platensis* and Fe_3O_4 catalyst residue were mixed until homogeneous and then put into the reactor tube in-situ. Temperature variations were 300, 400, 500, 550, and 600 °C, while variations of the catalyst used 2.5 and 5 grams.

The bio-oil was tested for density and pH. The density test is carried out by weighing the empty bottle, weighing the bottle containing the bio-oil, and the water phase you want to test. The weight of bio-oil divided by the volume of bio-oil is the specific gravity, then the calculation is carried out according to the formula. The pH test is carried out by diluting the pyrolysis product using (2) two kinds of diluents, namely acetone and water. pH checking using pH paper is then compared with the pH indicator and pH value of bio-oil and the water phase.

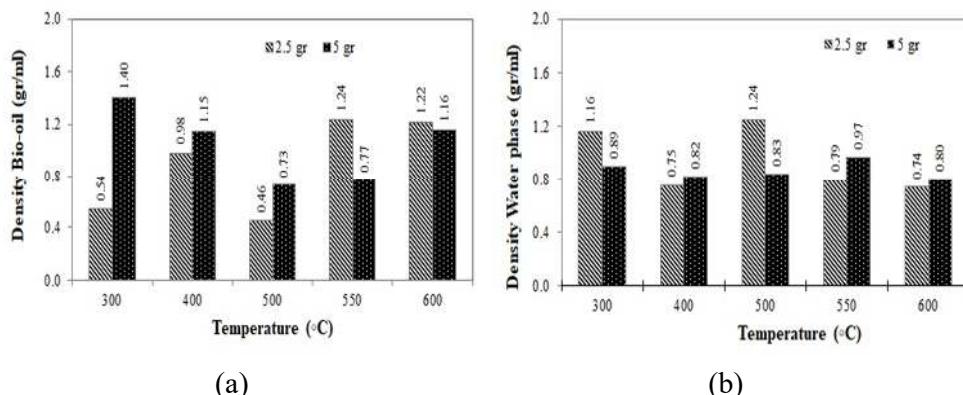


Figure 5. Effect of temperature and number of catalysts on (a) Bio-oil density (b) Water phase density.

Based on figure 5(a), it is seen the density of bio-oil in the use of the number of catalysts is 2.5 gram with temperatures of 300, 400, 500, 550, and 600 °C are 0.54, 0.98, 0.46, 1.24, and 1.22 gram/ml while for catalyst use 5 gram is 1.40, 1.15, 0.73, 0.77 and 1.16 gram/ml. The density value of bio-oil obtained is higher than in other fuel oil densities with the same volume. It will cause bio-oil to have a thicker texture and inhibit combustion in the engine, so the pressure drop will be more significant and end in engine damage. Based on research can conclude that the best bio-oil is bio-oil with low density.

Based on figure 5(b), density data obtained on the use of catalysts of 2.5 gram with sets of temperatures of 300, 400, 500, 550, and 600 °C in a row are 1.16, 0.75, 1.24, 0.79, and 0.74 gram/ml. The use of catalysts 5 grams with the same temperature set obtained was 0.89, 0.82, and 0.83, and at a rate of 0.97 and 0.80 gram/ml. The water-phase density varies because the water phase is affected by the water content in the bait material used and is also affected by water improvement during the pyrolysis process.

Conclusion

Pyrolysis of *spirulina platensis residue* (SPR) produces bio-oil products that can be environmentally friendly and sustainable fuels. The bio-oil yield from SPR pyrolysis is influenced by grain size, temperature, and the amount of Fe₃O₄ catalyst used. The experiment was carried out with a fixed-bed reactor with an average heating rate of 14.07 °C/minute. Based on the research results at the same temperature, the more catalysts used, the lower the yield of bio-oil and bio-char obtained. The higher the pyrolysis temperature, the higher the bio-oil yield and the optimum at 500 °C, the bio-oil products using 2.5 and 5 grams of catalyst are 25.01 and 17.67 %, respectively. The optimum temperature for the decomposition of SPR into bio-char is 300 °C, with a catalyst of 2.5 and 5 grams, respectively; the yield of biochar is 47.1 and 46.68 %. The optimum conditions for producing gas are obtained at a temperature of 300 °C, with a catalyst of 2.5 and 5 grams; the resulting gas yields are 23.59 and 19.74 %. The smaller the bio-oil density, the better it is used as a vehicle fuel. The pH of the bio-oil and the water phase diluted with water shows a value of 8. As for dilution using acetone, the pH of the water and bio-oil phases is 8 and 7, respectively. The higher the pH of the bio-oil, the lower the acidity, the better bio-oil quality.

Acknowledgements

The author would like to thank for research funding assistance through the Internal Research Fund Scheme through the Universitas Ahmad Dahlan Yogyakarta Lembaga Penelitian dan Pengabdian Kepada Masyarakat (LPPM) with contract number: PD-237/SP3/LPPM-UAD/2020.

References

- Budiardi, T., Utomo, N. B. P., & Santosa, A. (2010). Pertumbuhan dan kandungan nutrisi Spirulina sp. pada photoperiod yang berbeda. *Jurnal Akuakultur Indonesia*. 9(2), 146-156.
- Basu, P. (2010). Biomass Characteristics. Biomass Gasification Design Handbook, 27–63.
- Chutia, R. S., Kataki, R., & Bhaskar, T. (2014). Characterization of liquid and solid product from pyrolysis of Pongamia glabra deoiled cake. *Bioresour Technol* 165, 336–342

- Chen, W. H., Lin, B-J., Huang, M-Y. & Chang, J-S. (2015). Thermochemical conversion of microalgal biomass into biofuels: A review. *Bioresour. Technol.*, 184, 314–327.
- Chaiwong, K., & Kiatsiriroat, T. (2015). Characterizations of bio-oil and bio-char products from algae with slow and fast pyrolysis. *Int J Environ Bioenergy*. 10, 65–76.
- Debowski, M., Zielinski, M., Grala, A., & Dudek, M. (2014). Algae biomass as an alternative substrate in biogas production technologies-Review. *Renew. Sustain. Energy Rev.* 27, 596-604.
- Gultom, S. O., Zamalloa, C., & Hu, B. (2014). Microalgae Harvest through Fungal Pelletization—Co-Culture of Chlorella Vulgaris and Aspergillus niger. *Energies*, 7(7), 4417-4429.
- Jamilatun, S., Budhijanto, Rochmadi, Yuliestyan, A., & Budiman, A. (2019a), Valuable Chemicals Derived from Pyrolysis Liquid Products of *Spirulina platensis* residue, *Indones. J. Chem.*, 19 (3), 703 – 711.
- Jamilatun, Budhijanto, Rochmadi, A. Yuliestyan, H. Hadiyanto, & A. Budiman, (2019b), Comparative analysis between pyrolysis products of *Spirulina platensis* biomass and its residues, *Int. J. Renew. Energy Dev.*, 8(2), 133– 140.
- Jamilatun, S., Budhijanto, Rochmadi, & Yuliestyan, A., A. (2019c). Effect of grain size, temperature, and catalyst on characteristics of pyrolysis products from *Spirulina platensis* residue (SPR). *International Journal of Technology* 10 (3), 541-550.
- Jamilatun, S., Budiman, A., Anggorowati, H. Yuliestyan, A. Surya Pradana, Y. Budhijanto, & Rochmadi, (2019d). Ex-Situ Catalytic Upgrading of *Spirulina platensis* residue oil using silica-alumina catalyst, *Int. J. Renew. Energy Res.* 9(4), 1733–1740.
- Jamilatun, S., Mufandi, I., Evitasari R. T., & Budiman, A. (2020), Effects of temperature and catalysts on the yield of bio-oil during the pyrolysis of *Spirulina platensis* residue, *International Journal of Renewable Energy Research*, 10(2), 678-686.
- Payormhorm, J., Kangvansaichol, K., Reubroycharoen, P., Kuchonthara, P., & Hinchartanan, N. (2013). Pt/Al₂O₃-catalytic deoxygenation for the upgrading of Leucaena leucocephala-pyrolysis oil. *Bioresource Technology*, 139,128-135.
- Scott, S. A., Davey, M. P., Dennis, J. S., Horst, I., Howe, C. J., Lea-Smith, D. J., & Smith, A. G. (2010). Biodiesel from algae: challenges and prospects. *Current Opinion in Biotechnology*, 21, 227–286.
- Shen, Y., & Yoshikawa, K. (2013). Recent progress in catalytic tar elimination during biomass gasification or pyrolysis—A review. *Renewable and Sustainable Energy Reviews*, 21, 371–392.

- Verma, N. H., Mehrotra, S., Amitesh, S. A., & Mishra, B.N. (2010). Prospective of biodiesel production utilizing microalgae as the cell factories: A comprehensive discussion. *African Journal of Biotechnology*. 9 (10): 1402–1411.
- Yu, Z., Dai, M., Huang, M., Fang, S., Xu, J., Lin, Y., & Ma, X. (2018), Catalytic characteristics of the fast pyrolysis of microalgae over oil shale: analytical Py-GC/MS study, *Renew. Energy*, 125, 465–471.
- Yang, C., Li, R., Zhang, B., Qiu, Q., Wang, B., Yang, H., Ding, Y., & Wang, C. (2019), Pyrolysis of microalgae: A critical review, *Fuel Processing Technology*, 186, 53–72.
- Zang, L., Bao, Z., Xia, Z., Lu, Q., & Walters, K.B. (2018), Catalytic Pyrolysis of Biomass Polymer Wastes, *Catalysts*, 8, 659, 1-24.