

| The Multi Soil Layering Method for Wastewater Treatment: A Review | | | |
|--|------------|----------|------------|
| Tanggal | Author | Editor | Bukti |
| 28/07/2022 | Submission | Received | Lampiran 1 |
| 09/09/2022 | | Review 1 | Lampiran 2 |
| 30/09/2022 | | Accepted | Lampiran 3 |
| 27/10/2022 | | Publish | Lampiran 4 |

Lampiran 1



I Wayan Sutapa
[Indo. J. Chem. Res.] Submission Acknowledgement
To: Aster Rahayu

Inbox - Google 28 July 2022 10:04

Aster Rahayu:

Thank you for submitting the manuscript, "The Multi-Gol layering Method for Wastewater Treatment: Review" to Indonesian Journal of Chemical Research. With the online journal management system that we are using, you will be able to track its progress through the editorial process by logging in to the journal web site.

Submission URL: <https://ojs3.ungpali.ac.id/index.php/ijcr/authorDashboard/submission/6534>

Username: asterahayu

If you have any questions, please contact me. Thank you for considering this journal as a venue for your work.

I Wayan Sutapa

Editor In Chief
Indonesian Journal of Chemical Research

Multi Soil layering Method for Wastewater Treatment: Review

Commented [A1]: A Review

Aster Rahayu^{1*}, Irwan Mulyadi¹, Joni Aldilla Fajri², Siti Jamilatun¹, Nurul Wulandari¹, Yuni Marlana¹, Devi Yogi Noviana Ningsih¹, Lee Wah Lim³

¹Department of Chemical Engineering Department, Faculty of Industrial Technology, Universitas Ahmad Dahlan, Jl. Ringroad Selatan, Tamanan, Banguntapan, Bantul, D. I. Yogyakarta, Indonesia

²Department of Environmental Engineering, Faculty of Civil and Planning Engineering Universitas Islam Indonesia, Jl. Kaliurang KM 14,5, Sleman, Yogyakarta, Indonesia

³Department of Biomolecular Science, Faculty of Engineering, Gifu University, Yanagido 1-1, Gifu, Japan

*Corresponding author: aster.rahayu@che.uad.ac.id

Received:

Received in revised:

Accepted:

Available online:

Abstract

Liquid waste is the main source of contamination of water bodies, especially in river water. This pollution causes decreased water quality in water bodies. One of the treatments in wastewater treatment is to use the Multi Soil Layering (MSL) method. Because using the Multi Soil Layering (MSL) method is known to be inexpensive in terms of cost, easy to implement, does not require complicated maintenance so that it can be used continuously and is also environmentally friendly. One of the constituent materials of the MSL reactor is andesol soil, gravel, and perlite. MSL has two zones for wastewater treatment, namely the aerobic zone and the anaerobic zone. This journal review aims to compare the efficiency of reducing the levels of pollutant parameters from aerobic and anaerobic processes in the Multi Soil Layering (MSL) method in wastewater.

Commented [A2]: , because using the MSL method

Commented [A3]: The article review

Keywords: Aerobic, Anaerobic, Multi soil layering, Wastewater treatment.

INTRODUCTION

The MSL method is a wastewater treatment method that utilizes the ability of the soil as the main medium to reduce pollutant parameters and how to maximize the function of the soil, which is formed into a structure made in a construction consisting of a mixture of soil (organic) and rock composition. shaped like the arrangement of bricks. The composition of the soil mixture is usually made of selected soil, carbon, and others as well as for rock layers composed of additional materials such as rice husks, sawdust, zeolite, perlite, gravel, and

depending on the type of rock available (Latrach et al., 2016; Putra & Fitri, 2018, 2019).

Commented [A5]: Putra & Putri, 2018; and 201)

Commented [A4]: Multi Soil Layering (MSL)

In principle, the MSL method has the main treatment zones, namely the aerobic and anaerobic zones. The aerobic zone usually consists of rock (zeolite, gravel, perlite) while the anaerobic zone usually consists of a mixed layer of soil and activated carbon (charcoal) (Adinda and Elystia, 2015; Akhyar et al., 2016; Latrach et al., 2014; Mutia, Elystia, and Yenie, 2015).

Multi soil layering (MSL) is a method of treating wastewater that is effective and

efficient, easy and inexpensive without having to incur expensive costs (An et al., 2016; Latrach et al., 2014; Megah and Haribowo, 2016).

Currently, the Multi Soil Layering (MSL) method has been widely used as an alternative in wastewater treatment which has been proven to be effective in treating domestic wastewater and small industries (Hadrah et al., 2019; Sy et al., 2017). (Kasman, Herawati, and Hadrah 2021).

One example of domestic wastewater that contain of several pollutant such as NO_3^- , treated with the MSL method is wastewater from the rest of household activities. The rest of household activities pollute the community environment through substances contained in wastewater which is very dangerous if not handled properly, in addition to household wastewater there is also wastewater from small home industries such as the laundry industry, industrial home batik, coconut industry, screen printing industry. Similarly, industrial wastewater such as leather and weaving industry, containing some harmful pollutants that necessary to be treated. especially with adsorption method. Leather industry that hold some amount of coppers must be removed before spreading the undesirable effect to the environment (Maryudi et al., 2021).

From previous studies, the Multi Soil Layering (MSL) method has succeeded in reducing levels of biological pollutant parameters such as BOD, COD, TSS, DO, Ph, odor, and turbidity as well as heavy metal pollutant parameters such as Fe, Mn, and phosphate (Putri & Dyna, 2019). In numerous of studies, domestic wastewater can reduce BOD levels by about 68.67-87.63%, COD around 71.42-87.73%, and TSS around 69.11-77.12%. The cooking oil industry, it can reduce BOD levels

around 86-99%, COD around 71-96%, TSS around 77-88%, and pH from 6.37-6.95 to 6.99-7.24 (Sbahi et al., 2020).

This journal review aims to compare the efficiency of reducing levels of pollutant parameters from aerobic and anaerobic processes in the Multi Soil Layering (MSL) method in wastewater.

MULTI SOIL LAYERING

Multi Soil Layering (MSL) is a method used in the wastewater treatment process. The wastewater treatment process using this method is known to be inexpensive in terms of cost, easy to implement, does not require complicated maintenance so that it can be used continuously and is also environmentally friendly. In addition, the materials used in the MSL reactor are widely available and easy to find in Indonesia because the materials used can be obtained in nature and the environment around coconut charcoal, zeolite, rice husks, sawdust, activated charcoal from various organic materials and coatings. Anaerobic soil consists of andesol originating from the mountains, while perlite and gravel are the aerobic layers (Aldilla Fajri et al., 2018)

In wastewater treatment using the MSL method, soil is used as the main medium to reduce pollutant parameters and enhance soil function through its structure (Haribowo et al., 2019; Lamzouri et al., 2016; Mutia, Elystia, and Yenie, 2015; Song et al., 2018).

MSL method formed to become a reactor consisting of a mixed layer of soil and rock layers arranged like bricks. The composite layer of soil consists of organic matter, carbon elements found in charcoal, and other additives such as iron filings. Commonly used mixed layers such as

Commented [A8]: around

Commented [A9]: The article

Commented [A6]: pH

Commented [A10]: Mutia et al.,

Commented [A7]: around

perlite, gravel, and zeolite also depend on the type of rock contained in the composition of the bricks. Zeolite or perlite which containing silica group could support the better performance during adsorption process (Hanum, Farrah Fadhillah; Rahayu, 2022; Rahayu et al., 2015, 2021). The effective use period for the MSL system for waste treatment is 12.8 years (Ihsan et al., 2013). (Nadhirah, Riyanto, and Tri., 2021).

Based on the principle of the MSL method, there are two zones used in processing, namely the aerobic zone contained in the rock layer (perlite, gravel, and zeolite also depending on the type of rock present) and between the zeolite layer and soil mixture blocks. The function of the aerobic zone is to decompose organic matter, bind phosphate, oxidize/oxidise ferrous ions to ferric ions, and nitrify. The mixed

soil layer is in the anaerobic area. Using MSL, the wastewater treatment process consists of decomposition, filtration, fixation, nitrification, denitrification, absorption, and adsorption (Adinda & Elystia, 2015; Herman et al., 2017).

Numerous researches related on wastewater treatment using the Multi Soil Layering (MSL) which uses many compositions from the reactor making material and lots of samples have been tested. Some parameters are investigated from all research parameters that are often sought are as COD, BOD, TSS, ph, turbidity, odour, colour, Ammonia, nitrate, nitrite, potassium phosphate and metals such as Mn, Pb, Hg and Fe. Tabel 1 shown the composition of Multi Soil Layering (MSL):

Table 1. Multi Soil Layering (MSL) composition

| No | Composition | Waste Type | Aerobic/anaerobic MSL conditions | Success | Ref |
|----|--|--------------------------------|----------------------------------|---|-----------------------|
| 1 | Coconutshell activated charcoal,perlite,gravel, rice husk, and Andasol soil. (With variations of HLR5,10,20,40ml/min) | Coconut industrial waste water | Aerobes and Anaerobes | BOD (35.68 - 20.13 and 13.53-33.01) COD (20.13 - 84.62 and 69.23-88.62) Turbidity (84.76 - 97.99 and 88.35-98.66) E.coli (99.25 - 99.92 and 25-99.92) | (Putra & Fitri, 2018) |

Commented [A11]: Hanum et al., 2022

Commented [A12]: Nadhirah et al., 2021

| | | | | | |
|---|--|--|-----------------------|--|--|
| 2 | Coconut shell activated charcoal, perlite, gravel, rice husk, and Andasol soil.(With variations of HLR 5, 10, 20, 40 ml/min) | Coconut milk liquid waste | Aerobes and Anaerobes | Phosphate (99.28- 99.80 and 99.82 99.87) Nitrite (68.06 - 76.39 and 67.36- 74.31) Sulfate (96.97- 97.48 and 86.56- 97.30) Chloride (75.44– 85.51 and 82.99- 88.66) Manganese (Mn) (79.44 – 94.39 and 49.77- 80.61) Iron(Fe) (92.11– 97.50 and 94.41- 98.82) | (Putra & Fitri, 2019) |
| 3 | Crushed stone, perlite, Andasol soil, gravel, banana peel charcoal and coconut shell charcoal (Variation HLR 500,700,900 l/m ² day) | District peat water Tapung Kampar Regency | Anaerobic | Mn metal (36.65-55.83) Turbidity (63.86- 61.45) Ph (6.51-6.82) | (Adinda & Elystia, 2015) |
| 4 | MSL A reactor (Andasol soil, zeolite and quartz sand) MSL B reactor (Andasol soil, isthmus and pumice stone) | Sasirangan industrial liquid waste | | BOD (63.89%) COD (65.6%) | (Akhyar Okviyoandra, Antoni Pardede, 2016) |
| 5 | Gravel, perlite, ground activated charcoal of Kalapa shell and activated | Palm oil effluent in anaerobic pond II (outlet) WWTP PT. | Anaerobic | TSS (coconut) = (79.77-88.76) Ammonia (coconut) = (39.85-56.52) | (Mutia et al., 2015) |

Commented [A13]: Okviyoandra & Pardede, 2016

| | | | | | |
|---|--|--|--|---|--------------------------|
| | <p>charcoal of banana peel.</p> <p>Reactor 1 MSL : Anaerobic layer of coconut shell activated charcoal and soil</p> <p>Reactor 2 MSL : Anaerobic layer of activated charcoal banana peel and soil</p> <p>(Variation of HLR 500,750, and 1000 L/m².day)</p> | Nusantara V Sei Pagar Plantation, Riau. | | TSS (banana) = (73.03-79.77) | |
| 6 | <p>MSL1 reactor :Zeolite layer and gravel and gravel mixed with zeolite</p> <p>MSL2 reactor :(soil mixture layer (coconut shell activated charcoal and Andasol soil) + (Paddy straw activated charcoal and Andasol soil) + (sawdust and Andasol soil)</p> <p>(Coconut shell and Andasol soil layers are more efficient)</p> | Waste in the WWTP in RT.04 RW.07 Tlogomas Village. | | <p>pH (4.25-5.77)</p> <p>TSS (58.42-71.05)</p> <p>TDS (18.05-31.84)</p> <p>DO (75.06-81.88)</p> <p>Turbidity (72.91-76.69)</p> <p>Electrical Conductivity (16.49-31.77)</p> | (Megah & Haribowo, 2016) |
| 7 | <p>Crushed stone, gravel/zeolite, soil mixture, and plastic nets (with variations of hrl 500,750, and 1000 l/m².day)</p> <p>(more efficient eg with the addition of zeolite</p> | Laundry Liquid Waste | | <p>COD (74-87)</p> <p>BOD (75-88)</p> <p>TSS (73-88)</p> <p>Total phosphate (20-78)</p> <p>pH (6.73)</p> | (Hadrah et al., 2019) |

| | | | | | |
|----|---|--|-----------|---|-----------------------|
| | is better than without zeolite) | | | MBA (85-95) | |
| 8 | Reactor 1 MSL : gravel and charcoal, mixed layer of andisol soil, and crushed stone. Reactor 2 MSL : Sawdust and gravel, mixed layer of andisol and crushed stone. | Domestic wastewater from cafeteria and kitchen at Kasetsart University, Bangkok | Anaerobic | Oils and Fats (27,778-89,474) | (Sy et al., 2017) |
| 9 | A mixture of andosol soil, zeolite rock, gravel, rice husk, coconut shell charcoal, and sawdust. (most effective with sawdust in lowering heavy metal indicators) | Dug well water and river or ditch water in Teluk Nilap Village, Kubu Babussalam, Rokan Hilir | | Ph (50) COD (31.16) BOD (73.16) Metal Hg (70.75) Metal Pb (26.74) Metal Fe (46.94) | (Putri & Dyna, 2019) |
| 10 | Reactor MSL 1: a layer of gravel mixed with activated charcoal with soil MSL 2 reactor: layer of gravel and sawdust with soil, | Rice Field Liquid Waste | Anaerobic | Potassium (19,443 – 100) | (Ihsan et al., 2013) |
| 11 | Andesole soil and charcoal | Hotel Liquid Waste | Anaerobic | COD (55-90) | (Dan et al., 2001) |
| 12 | Andisol soil, bagasse activated charcoal powder and fine bagasse powder | Tofu industrial liquid waste | Aerobic | TSS (86.86) BOD (78.87) COD (89.75) | (Dessy Novela, 2019) |
| 13 | ljud, iron, sawdust, activated charcoal that has been sifted with a size of 50 mesh and volcanic soil | Polluted water in Mount Nago Irrigation | Anaerobic | Ph(8) COD (97.21)-99.59) | (Herman et al., 2017) |

| | | | | | |
|----|--|--|--|---|---|
| | (variation of HLR 250,500,1000 l/m ² /day) | area of Pasar Baru, Cupak Tengah Village, Pauh IX District, Padang. | | BOD (98.84- 99.73) PO ₄ - (>0.03 ppm) NH ₄ + (<0.2 ppm) | |
| 14 | Zeolite, gravel sand, porous plate and outlet pipe, soil, charcoal and iron powder. | Synthetic waste in rural China | | COD (98.29) TP (100) NH ₄ (76.60) | (Hong et al., 2019) |
| 15 | Mixture of soil, crushed stone and zeolite | Leachate Liquid Waste | | COD (96.771%) Ammonia (99.966%) Fe (99.279%) Color (96.53%) pH 7.00 | (Lamzouri et al., 2016) |
| 16 | Gravel, zeolite, a mixture of soil and coconut shell charcoal | Ethanol Industrial Liquid Waste | | COD (80.85) BOD (94.68) TSS (83.99) | (Irmanto, Suyata and Zusfahair, 2013) |
| 17 | Crushed stone, river pebbles, mixed soil and gravel | Leachate Liquid Waste | | COD (53.457) Ammonia (98,325) Fe (88.5) Ph 7.00 | (Kasman, M., Herawati, Peppy and Hadrah, H, 2021) |
| 18 | Sand, gravel, humus soil, coconut charcoal. (innovation with sand with HLR 0.3 ; 0.6 ; 0.9 and 1.2 L/hour) | Liquid waste (WWTP) the last pool of the CPO industry | | COD (89.06- 97.47) BOD (88.61- 98.37) Ph (6.72-7.36) | (Sidebang and Syafnil, 2017) |

| | | | | Oil and Fat Content (88.27 - 95.48) | |
|----|--|--|-----------------------|---|-----------------------|
| 19 | Volcanic soil, rice husk, coconut shell activated charcoal, zeolite, iron powder. (variation of water rate (HLR) 10, 20, 40, 80 mL/min) | The sample came from the well water of a resident in Jati, Padang. | Aerobes and Anaerobes | Turbidity (54.65 and 44.04) Mn (66.44 and 47.26) Nitrite (58.74 and 49.74) Nitrates (58.34 and 45.57) Ph (77 and 73) Odor (no smell) | (Song et al., 2020) |
| 20 | Sawdust, andisol soil, coarse gravel and fine gravel, and fine charcoal from coconut shells. | Cooking Oil Industry Liquid Waste | | BOD (98) COD (96) TSS (88) | (Swesty et al., 2019) |
| 21 | Silica sand, coconut husk, activated carbon, ginger coral, water hyacinth, fine zeolite, soil, coarse zeolite, gravel, and dacron | Batik liquid waste in Binangun Village, Banyumas District, Banyumas Regency. | | Ph (7.94) Chromium (29.41) Turbidity (low) Odor (low) | (Wibowo et al., 2019) |

Table 1 show that it can be seen that the percentage value for almost all parameters is close to perfect. In example, the COD results of 99.59% in the Mount Nago irrigation water sample in the Pasar Baru area, Cupak Tengah Village, Pauh IX District, Padang. The composition of the Multi Soil Layering (MSL) reactor is palm fibre, iron, sawdust, activated charcoal that has been sifted with a size of 50 mesh and volcanic soil with variations in HLR or

flow rate of 250,500,1000 L/m².day with anaerobic process conditions (Hadrah et al., 2019). The BOD result was 98.8% in the Mount Nago irrigation water sample in the Pasar Baru area, Cupak Tengah Village, Pauh IX District, Padang. The composition of the Multi Soil Layering (MSL) reactor is palm fibre, iron, sawdust, activated charcoal that has been sifted with a size of 50 mesh and volcanic soil and with variations in HLR or flow rate of 250,500,1000

Commented [A14]: ?

L/m².day with anaerobic process conditions (Hadrah et al., 2019). The TSS results were 79.77% with banana peel activated carbon and 88.76% with coconut shell activated carbon in the sample of palm oil liquid waste in the anaerobic pond II (outlet) of IPAL PT. Nusantara V Sei Pagar Plantation, Riau. With the composition of gravel, pearlite, soil activated charcoal of Kalapa shell and activated charcoal of banana peel, in this research there are two innovations, namely by making two reactors with activated carbon of banana peel and activated carbon of coconut shell where the reactor with the composition of activated charcoal of coconut shell is more effective, with HLR 500, 750, and 1000 L/m².day under anaerobic conditions (Megah and Haribowo, 2016). The yield of Fe metal is 99% and 99, 27% in samples of coconut milk liquid waste and Leachate liquid waste with reactor compositions Coconut shell activated charcoal, pearlite, gravel, rice husks, and Andasol soil and a mixture of soil, crushed stone and zeolite with an anaerobic process (Komala et al., 2012; Mutia, Elystia, and Yenie, 2015).

Manganese yield was 94.39% in coconut milk liquid waste samples with reactor compositions Coconut shell activated charcoal, pearlite, gravel, rice husks, and Andasol soil and with variations in HLR or flow rates of 5, 10, 20, 40, ml/minute with aerobic processes (Mutia, Elystia, and Yenie, 2015). It can be seen that the Multi Soil Layering (MSL) method can be used to treat industrial, household and other wastewater. With many reactor composition innovations that are easy to find around us.

From the parameters that have been tested, each shows the level of success. Some samples that have been tested show MSL

conditions, some are aerobic, and some are anaerobic, some have two states at once. However, in MSL conditions, this dramatically affects the success rate. In addition to aerobic and anaerobic process conditions, variations in the Hydraulic Loading Rate (HLR) are also very influential on the success of the Multi Soil Layering method. There is still very little explanation of this condition in aerobic conditions because the aerobic process is less efficient for use in wastewater at high pollutant levels above 3000 mg/L.

AEROBIC

Aerobic or aerobic is a biological waste treatment that uses oxygen as a processing process. In the anaerobic process, the wastewater treatment process is carried out biologically; in the process, micro-organisms or bacteria are used to decompose certain pollutant compounds in a biological reactor (Aldilla Fajri et al., 2018; Harimu et al., 2020). Conditions are created to adjust the growth of micro-organisms or bacteria to be used. Based on the oxygen present in the heterotrophic bacteria environment, heterotrophic bacteria are therefore divided into two types, namely: Firstly, Absolute aerobic bacteria: i.e. bacteria that, if there is no oxygen in the environment, can not live. Secondly, Aerobic, facultative bacteria: bacteria that can grow even without oxygen, but if there is oxygen in their environment, they will show faster growth. Factors that can affect the wastewater treatment process using aerobic such as hydrocarbon, oxygen, the composition of microorganism, pH, temperature, and nutrients (Fajri et al., 2021).


Commented [A15]: ?

Commented [A16]: Fari et al., 2018

Aerobic bacteria used in wastewater treatment processes contain organic pollutants and other chemical compounds such as sulfides and ammonia. In this process, these compounds will be decomposed first to produce neutral and more environmentally friendly compounds. The aerobic decomposition process can be seen as follows:

Organic Decomposition Reaction:



Organic Pollutant
Compound





Oxygen (O₂)

Heterotrophic

Nitrification Reaction:



Sulfur Oxidation Reaction:



Based on these chemical reactions, it can be seen that oxygen is very influential because oxygen is needed to decompose pollutants, and the amount of oxygen required is proportional to the amount of organic, sulfide and ammonia present in wastewater (Hartaja, 2015). There are advantages in the aerobic process: the reaction is faster than the anaerobic process, and organic pollutants can be degraded to deficient concentrations. Not only has its advantages, the wastewater treatment process carried out aerobically also has several disadvantages (Kasman et al., 2021). It takes much energy to supply oxygen to a wastewater treatment reactor, and the operating costs are high. During the process, the mud will appear so that it requires further handling and requires a relatively expensive cost. On the other hand, less efficient when used in wastewater with high levels of pollutants or waste above 3000 mg/l.

In treating wastewater using an aerobic method, it can reduce the level of danger from the water with the success rate of each and the type of each waste with variations in the Hydraulic Loading Rate (HLR) in each process.

The following is a table of the success rate of the aerobic process:

Commented [A17]: mg/L

Table 2. The success rate of aerobic methods in wastewater treatment

| No | Waste Type | Waste Content | Level of success (%) | Ref |
|----|------------------------------------|---------------|----------------------|-------------------------|
| 1 | Coconut milk industry liquid waste | BOD | 35.68 - 20.13 | (Putra and Fitri, 2018) |
| | | COD | 20.13 - 84.62 | |
| | | Turbidity | 84.76 - 97.99 | |
| | | E. coli | 99.25 - 99.92 | |

| | | | | |
|---|--|----------------|---------------|-------------------------|
| 2 | Coconut industry liquid waste | Phosphate | 99.28 - 99.80 | (Putra and Fitri, 2019) |
| | | Nitrite | 68.06 - 76.39 | |
| | | Sulfate | 96.97 - 97.48 | |
| | | Chloride | 75.44 - 85.51 | |
| | | Manganese (Mn) | 79.44 - 94.39 | |
| | | Iron (Fe) | 92.11 - 97.50 | |
| 3 | Tofu industrial liquid waste | TSS | 86.86 | (Dessy Novela, 2019) |
| | | BOD | 78.87 | |
| | | COD | 89.75 | |
| 4 | The sample came from the well water of a resident in Jati, Padang. | Turbidity | 54.63 | (Wibowo et al., 2019) |
| | | M N | 66.44 | |
| | | Nitrite | 58.74 | |
| | | Nitrate | 58.34 | |
| | | Ph | 77 | |
| | | Smell | No smell | |

Table 2 shows that the highest BOD value is 78.7 in the aerobic process, which this process tests samples of tofu industrial waste. . Factors that influence this process are variations Hydraulic Loading Rate (HLR) or water rate and reactor composition. At the highest COD value of 89.75 which this parameter is also shown in the tofu industrial waste test. Factors that influence this process are variations Hydraulic Loading Rate (HLR) or water rate and reactor composition.

ANAEROBIC





Anaerobic or anaerobic is a process that does not involve free oxygen as an oxidant. Anaerobic processing is carried out using microorganisms. In wastewater treatment the

use of microorganisms has a fairly high content of organic matter, so it is very potential if developed. Microorganisms can directly use the wastewater as nutrients for growth. Anaerobic microorganisms are sensitive to oxygen, because they can inhibit growth (Hartaja, 2015; Koottatep et al., 2021).

Methane gas is obtained from an anaerobic process that has gone through various stages. The anaerobic process produces single carbon compounds because almost all organic polymers can be decomposed into single carbon compounds. The decomposition stage includes 2 stages, namely the stage of formation of methane (gasification) and the stage of formation of asa (adification). The formation of methane gas comes from acetic acid, H₂ and

Commented [A18]: ? mg/L

CO₂. In addition, it can result from the conversion of formic acid and methanol (Hartaja, 2015).



The anaerobic process has several advantages include:

- Energy saving, because the decomposition process of organic pollutants by microbes is carried out without using air, so energy is not needed to supply air as occurs in aerobic processes (Hartaja, 2015).
- Produce biogas (methane gas). The final breakdown of pollutant products, namely methane gas which can be used as gas fuel, can be used for power generators and also in steam generator boilers (Hartaja, 2015).
- Can treat waste with high concentrations

such as BOD up to 80,000 mg/l (Hartaja, 2015).

In addition to advantages, the anaerobic wastewater treatment process has several disadvantages include:

- Slow pollutant decomposition reaction (Komala et al., 2012).
- Sensitive if exposed to air, temperature and load fluctuations (Komala et al., 2012).
- If treating low concentration waste is less effective, such as BOD below 3,000 mg/l (Komala et al., 2012).
- In the development of biomass to be used it takes a long time in start-up (Komala et al., 2012).

In the anaerobic process, it is known that the pollutant reaction rate is fundamentally influenced by the number of bacteria. In addition, the degradation process will take place quickly if given the addition of nutrients such as nitrogen and phosphate compounds. The anaerobic process will be disrupted if there are chemicals such as cyanide compounds, sulfur, and heavy metals. The following is a table of the success rate of the anaerobic process:

Table 3. The success rate of anaerobic methods in wastewater treatment

| No | Waste Type | Waste Content | Level of success | Ref |
|----|-------------------------------|------------------------------|--|--------------------------|
| 1 | Peat Water Treatment | pH Mn. metal Turbidity | 6.51-6.82 36,6555,83 63.86-61.45 | (Adinda & Elystia, 2015) |
| 2 | Coconut industry liquid waste | Phosphate Nitrite | 99.82-99.87 67.36-74.31 | |

Commented [A19]: mg/L

Commented [A20]: delete

| | | | | |
|---|---|-------------------|---------------|-----------------------|
| | | Sulfate | 86.56-97.30 | (Putra & Fitri, 2019) |
| | | Chloride | 82.99-88.66 | |
| | | Manganese (Mn) | 49.77-80.61 | |
| | | Iron (Fe) | 94.41-98.82 | |
| 3 | Coconut milk industry liquid waste | BOD | 13.53-33.01 | (Mutia et al., 2015) |
| | | COD | 69.23-88.62 | |
| | | Turbidity | 88.35-98.66 | |
| | | E. coli | 25-99.92 | |
| 4 | Palm Oil Liquid Waste | TSS (coconut) | 79.77 – 88.76 | (Mutia et al., 2015) |
| | | TSS (banana) | 73.03-79.77 | |
| | | Ammonia (coconut) | 39.85 – 56.52 | |
| 5 | Domestic wastewater from cafeteria and kitchen at Kasetsart University, Bangkok | Oils and Fats | 27,778-89,474 | (Sy et al., 2017) |
| 6 | Rice Field Liquid Waste | Potassium | 19,433 -100 | (Ihsan et al., 2013) |
| 7 | Hotel Liquid Waste | COD | 55-90 | (Dan et al., 2001) |
| 8 | Polluted water in Mount Nago Irrigation area of Pasar Baru, Cupak Tengah Village, Pauh IX District, Padang. | Ph | 8 | (Herman et al., 2017) |
| | | COD | 97.21)-99.59 | |
| | | BOD | 98.84-99.73 | |
| | | PO4- | (>0.03 ppm | |
| | | NH4+ | <0.2ppm | |
| 9 | The sample came from the well water of a resident in Jati, Padang. | Turbidity | 44.04 | (Song et al., 2020) |
| | | M N | 47.26 | |
| | | Nitrite | 49.74 | |
| | | Nitrate | 45.57 | |
| | | Ph | 73 | |
| | | Smell | No smell | |

Based on table 3, anaerobic msl conditions have been tested with several different samples and waste content which includes potassium, TSS (coconut), TSS (banana), ammonia, BOD, COD, turbidity, E. coli, phosphate, nitrite, Sulfate, Chloride, Manganese (Mn), Iron (Fe), Turbidity, Mn, Nitrate, Ph, Odor, Odorless, Oil and Fat, PO_4 , NH_4^+ and metal Mn (Latupeirissa & Fransina, 2014; Silalahi, 2017). Adinda, T., & Elystia, S. (2015). *Metoda Multi Soil Layering Dalam Pengolahan Air Gambut Dengan Variasi Hydraulic Loading Rate Dan Material Organik Pada Lapisan Anaerob*. 2(1), 1–7.

- Akhyar Okviyoandra, Antoni Pardede, and R. R. A. A. K. W. (2016). Penurunan Bod Dan Cod Pada Limbah Cair Sasirangan Menggunakan Metoda Multi Soil Layering (Msl). *Media Sains*, 9(2), 162–166.
- Aldilla Fajri, J., Fujisawa, T., Trianda, Y., Ishiguro, Y., Cui, G., Li, F., & Yamada, T. (2018). Effect of Aeration Rates on Removals of Organic Carbon and Nitrogen in Small Onsite Wastewater Treatment System (Johkasou). *MATEC Web of Conferences*, 147. <https://doi.org/10.1051/mateconf/201814704008>
- An, C. J., McBean, E., Huang, G. H., Yao, Y., Zhang, P., Chen, X. J., & Li, Y. P. (2016). Multi-soil-layering systems for wastewater treatment in small and remote communities. *Journal of Environmental Informatics*, 27(2), 131–144. <https://doi.org/10.3808/jei.201500328>
- Dan, E., Penyerapan, K., Ash, F. L. Y., Edwin, T., Elystia, S., Amelia, D., Indah, S., & Helard, D. (2001). *PENYISIHAN MINYAK DAN LEMAK DARI LIMBAH CAIR HOTEL DENGAN METODE MULTI SOIL LAYERING (MSL) satu sumber limbah cair domestik . Gubernur Sumatera Barat Nomor 26 Tahun 2001 tentang Baku Mutu Limbah Cair Bagi Kegiatan Hotel di yang telah mengujicobakan meto*.
- Dessy Novela, I. D. (2019). Penurunan COD, BOD DAN TSS Pada Limbah Cair Industri Tahu Melalui Sistem Multy Soil Layering (MSL) Menggunakan Arang Karbon Ampas Tebu. *Journal of Residu*, 3(21), 8–14.
- Fajri, J. A., Wulandari, D., Nurmiyanto, A., & Rahayu, A. (2021). Penurunan Kandungan Hidrokarbon Menggunakan Constructed Wetland Reactor Dalam Mengolah Limbah Minyak Removal of Hydrocarbon Compounds Using Constructed Wetland Reactor to Treat Oily Wastewater. *Open Science and Technology*, 01(02), 246–256.
- Hadrah, H., Kasman, M., & Septiani, K. T. (2019). Analisis Penurunan Parameter Pencemar Limbah Cair Laundry dengan Multi Soil Layering (MSL). *Jurnal Daur Lingkungan*, 2(1), 36. <https://doi.org/10.33087/daurling.v2i1.22>
- Hanum, Farrah Fadhillah; Rahayu, A. (2022). Studi Pemanfaatan dan Metode Pemisahan Silika dari Coal Fly Ash A Study for Silika Utilization and Its Separation Method from. *Open Science and Technology*, 02(01), 26–32.
- Haribowo, R., Megah, S., & Rosita, W. (2019). Efisiensi Sistem Multi Soil Layering Pada Pengolahan Air Limbah Domestik Pada Daerah Perkotaan Padat Penduduk. *Jurnal Teknik Pengairan*, 10(1), 11–27. <https://doi.org/10.21776/ub.pengairan.2019.010.01.2>
- Harimu, L., Haetami, A., Sari, C. P., Haeruddin, H., & Nurlansi, N. (2020). Perbandingan Kemampuan Aerasi Sembur (Spray) dengan Metode Adsorpsi Menggunakan Adsorben Serbuk Kulit Buah Kakao

Commented [A21]:

- untuk Menurunkan Kadar Besi dan Mangan Pada Air Sumur Gali. *Indo. J. Chem. Res.*, 8(2), 137–143. <https://doi.org/10.30598/ijcr.2020.8-hrm>
- Hartaja, N. I. S. dan D. R. K. (2015). Pengolahan Air Lindi Dengan Proses Biofilter Anaerob-Aerob Dan Denitrifikasi. *Pusat Teknologi Lingkungan, BPPT*, 8(1).
- Herman, W., Darmawan, D., & Gusnidar, G. (2017). Pemanfaatan Tanah Vulkanik Dalam Sistem Multiple Soil Layering (MSL) Terhadap Pemurnian Air Irigasi Terpolusi. *Jurnal Bibiet*, 2(2), 49–59. <https://doi.org/10.22216/jbtt.v2i1.3085>
- Hong, Y., Huang, G., An, C., Song, P., Xin, X., Chen, X., Zhang, P., Zhao, Y., & Zheng, R. (2019). Enhanced nitrogen removal in the treatment of rural domestic sewage using vertical-flow multi-soil-layering systems: Experimental and modeling insights. *Journal of Environmental Management*, 240(November 2018), 273–284. <https://doi.org/10.1016/j.jenvman.2019.03.097>
- Ihsan, T., Indah, S., & Denny, H. (2013). Penyisihan Kalium dari Limbah Cair Persawahan dengan Metode Multi Soil Layering (MSL). *Jurnal Teknik Lingkungan*, 10(2), 133–141.
- Kasman, M., Herawati, P., & Hadrah, H. (2021). Pengaruh Hydraulic Loading Rate (Hlr) Terhadap Pengolahan Leachate Dengan Menggunakan Metoda Multi Soil Layering (Msl). *Sustainable Environmental and Optimizing Industry Journal*, 1(2), 1–8. <https://doi.org/10.36441/seoi.v1i2.178>
- Komala, P. S., Helard, D., & Delimas, D. (2012). Identification of Anaerobic Dominant Microbes in Rubber Industrial Waste Water Treatment With Multi Soil Layering (MSL) System. *Jurnal Teknik Lingkungan UNAND*, 9(1), 74–88.
- Koottatep, T., Pussayanavin, T., Khamyai, S., & Polprasert, C. (2021). Performance of novel constructed wetlands for treating solar septic tank effluent. *Science of the Total Environment*, 754(6). <https://doi.org/10.1016/j.scitotenv.2020.142447>
- Lamzouri, K., Mahi, M., Ouatar, S., Bartali, E., Masunaga, T., Latrach, L., & Mandi, L. (2016). Application of Multi-Soil-Layering Technique for Wastewater Treatment in Moroccan Rural Areas: Study of Tehe Operation Process for an Engineering Design. *Journal of Materials and Environmental Science*, 7(2), 579–585.
- Latrach, L., Masunaga, T., Ouazzani, N., Hejjaj, A., Mahi, M., & Mandi, L. (2014). Removal of bacterial indicators and pathogens from domestic wastewater by the multi-soil-layering (MSL) system. *Soil Science and Plant Nutrition*, 61(2), 337–346. <https://doi.org/10.1080/00380768.2014.974480>
- Latrach, L., Ouazzani, N., Masunaga, T., Hejjaj, A., Bouhoum, K., Mahi, M., & Mandi, L. (2016). Domestic wastewater disinfection by combined treatment using multi-soil-layering system and sand filters (MSL-SF): A laboratory pilot study. *Ecological Engineering*, 91, 294–301. <https://doi.org/10.1016/j.ecoleng.2016.02.036>
- Latupeirissa, J., & Fransina, E. G. (2014). *THE CHARACTERIZATION OF CLAYS FROM LATUHALAT VILLAGE ACTIVATED USING AMMONIUM NITRATE* Karakterisasi Lempung Asal Desa Latuhalat Yang Teraktivasi Amonium Nitrat. 78–82.

- Maryudi, M., Rahayu, A., Syauqi, R., & Islami, M. K. (2021). Teknologi Pengolahan Kandungan Kromium dalam Limbah Penyamakan Kulit Menggunakan Proses Adsorpsi: Review. *Jurnal Teknik Kimia Dan Lingkungan*, 5(1), 90. <https://doi.org/10.33795/jtkl.v5i1.207>
- Megah, S., & Haribowo, R. (2016). *Efisiensi Pengolahan Limbah Domestik Menggunakan Metode Multi Soil Layering*.
- Mutia, R., Elystia, S., & Yenie, E. (2015). Metode Multi Soil Layering dalam Penyisihan Parameter TSS Limbah Cair Kelapa Sawit dengan Variasi Hydraulic Loading Rate (HLR) dan Material Organik pada Lapisan Anaerob. *Jurnal Online Mahasiswa Fakultas Teknik Universitas Riau*, 2(1), 1–6.
- Putra, A., & Fitri, W. E. (2018). Efektivitas Penurunan TSS, BOD, COD, Dan E.Coli Limbah Cair Industri Santan Kelapa Dengan Metode MSL (Multi Soil Layering) Yang Dimodifikasi. *Seminar Nasional Pelestarian Lingkungan (SENPLING) 2018*, 209–217.
- Putra, A., & Fitri, W. E. (2019). Efektivitas Multi Soil Layering Dalam Mereduksi Limbah Cair Industri Kelapa. *Dalton : Jurnal Pendidikan Kimia Dan Ilmu Kimia*, 2(2), 1–15. <https://doi.org/10.31602/dl.v2i2.2394>
- Putri, V. D., & Dyna, F. (2019). Jurnal Katalisator. *Standarisasi Ganyong (Canna Edulis Kerr) Sebagai Pangan Alternatif Pasien Diabetes Mellitus*, 4(2), 111–118.
- Rahayu, A., Fadhilah Hanum, F., Aldilla Fajri, J., Dwi Anggraini, W., & Khasanah, U. (2021). Review: Pengolahan Limbah cair Industri dengan Menggunakan Silika A Review: Industrial Liquid Waste Treatment Using Silica. *Open Science and Technology*, 02(01), 2776–169. <https://opscitech.com/journal>
- Rahayu, A., Lim, L. W., & Takeuchi, T. (2015). Preparation of a hybrid monolithic stationary phase with allylsulfonate for the rapid and simultaneous separation of cations in capillary ion chromatography. *Journal of Separation Science*, 38(7), 1109–1116. <https://doi.org/10.1002/jssc.201401264>
- Sbahi, S., Ouazzani, N., Latrach, L., Hejjaj, A., & Mandi, L. (2020). Predicting the concentration of total coliforms in treated rural domestic wastewater by multi-soil-layering (MSL) technology using artificial neural networks. *Ecotoxicology and Environmental Safety*, 204. <https://doi.org/10.1016/j.ecoenv.2020.111118>
- Sidebang, C. P., & Syafnil. (2017). Use of Sand as a Component of Multi Soil Layering (MSL) System to Minimize Liquid Waste Contaminant of Crude Palm Oil (CPO). *Jurnal Agro Industri*, 7(2), 115–124.
- Silalahi, I. H. (2017). *ADSORPSI Hg (II) MENGGUNAKAN Sargassum crassifolium DENGAN ADANYA Pb (II), Cu (II) DAN Fe (II) Adsorption of Hg (II) by Using Sargassum crassifolium With Presence of Pb (II), Cu (II) And Fe (II)*. 5(1), 7–11.
- Song, P., Huang, G., An, C., Shen, J., Zhang, P., Chen, X., Shen, J., Yao, Y., Zheng, R., & Sun, C. (2018). Treatment of rural domestic wastewater using multi-soil-layering systems: Performance evaluation, factorial analysis and numerical modeling. *Science of the Total Environment*, 644, 536–546. <https://doi.org/10.1016/j.scitotenv.2018.06.331>

- Song, P., Huang, G., Hong, Y., An, C., Xin, X., & Zhang, P. (2020). A biophysiological perspective on enhanced nitrate removal from decentralized domestic sewage using gravitational-flow multi-soil-layering systems. *Chemosphere*, 240. <https://doi.org/10.1016/j.chemosphere.2019.124868>
- Swesty, N., Zein, R., & Zilfa, Z. (2019). Penjernihan Air Sumur Menuju Air Layak Minum Dengan Metoda Lapisan Multi Media (LMM). *Jurnal Riset Kimia*, 10(1), 9–19. <https://doi.org/10.25077/jrk.v12i2.297>
- Sy, S., Muchtar, H., Sofyan, & Kasman, M. (2017). The Effect of MSL Reactor Influent Flow Rate on Reduction of BOD, COD, TSS and Oils/Fats of Edible Oil Industry Wastewater. *Jurnal Litbang Industri*, 7(1), 41–51.
- Wibowo, D. N., Wicaksono, R., & Naufalin, R. (2019). Application of Multi Soil Layer Type of Batik Liquid Waste Treatment Units and Phytoremediation on Batik SME of Binangun, Banyumas. *Prosiding Seminar Nasional Dan Call for Papers*, 8, 19–20.

Of all the samples that have been tested, the highest success rate is obtained in the polluted water sample obtained at the Gunung Nago Irrigation area of Pasar Baru, Cupak Tengah Village, Pauh IX District, Padang with COD waste content, the success rate is 97.21-99,59% proving that anaerobes are capable of treating high concentrations of waste.

CONCLUSION

Comparing aerobes and anaerobes in handling domestic waste using the MSL process, it turns out that using anaerobes is superior to aerobics. Aerobic processes are less efficient for use in wastewater at high pollutant levels above 3000 mg/L. At the same time, using this can reduce organic waste with high levels of up to 80,000 mg/L. In using anaerobes, there are several advantages, namely saving energy and producing biogas. Besides being profitable, the anaerobic process also has a weakness. The reaction in reducing pollutants tends to be slower, sensitive to air, temperature fluctuations in the load, and less effective in treating waste with low levels below 3000mg/L.

ACKNOWLEDGMENT

All Acknowledgments must be conveyed (if any) to the contributing parties, aid providers (complete with contract numbers), and other parties who participated in the preparation of this article.

Commented [A22]: re-adjusted

REFERENCES

- Adinda, T., & Elystia, S. (2015). *Metoda Multi Soil Layering Dalam Pengolahan Air Gambut Dengan Variasi Hydraulic Loading Rate Dan Material Organik Pada Lapisan Anaerob*. 2(1), 1–7.
- Akhyar Okviyoandra, Antoni Pardede, and R. R. A. A. K. W. (2016). Penurunan Bod Dan Cod Pada Limbah Cair Sasirangan Menggunakan Metoda Multi Soil Layering (Msl). *Media Sains*, 9(2), 162–166.
- Aldilla Fajri, J., Fujisawa, T., Trianda, Y., Ishiguro, Y., Cui, G., Li, F., & Yamada, T. (2018). Effect of Aeration

- Rates on Removals of Organic Carbon and Nitrogen in Small Onsite Wastewater Treatment System (Johkasou). *MATEC Web of Conferences*, 147. <https://doi.org/10.1051/mateconf/201814704008>
- An, C. J., McBean, E., Huang, G. H., Yao, Y., Zhang, P., Chen, X. J., & Li, Y. P. (2016). Multi-soil-layering systems for wastewater treatment in small and remote communities. *Journal of Environmental Informatics*, 27(2), 131–144. <https://doi.org/10.3808/jei.201500328>
- Dan, E., Penyerapan, K., Ash, F. L. Y., Edwin, T., Elystia, S., Amelia, D., Indah, S., & Helard, D. (2001). *PENYISIHAN MINYAK DAN LEMAK DARI LIMBAH CAIR HOTEL DENGAN METODE MULTI SOIL LAYERING (MSL) satu sumber limbah cair domestik . Gubernur Sumatera Barat Nomor 26 Tahun 2001 tentang Baku Mutu Limbah Cair Bagi Kegiatan Hotel di yang telah mengujicobakan meto.*
- Dessy Novela, I. D. (2019). Penurunan COD, BOD DAN TSS Pada Limbah Cair Industri Tahu Melalui Sistem Multy Soil Layering (MSL) Menggunakan Arang Karbon Ampas Tebu. *Journal of Residu*, 3(21), 8–14.
- Fajri, J. A., Wulandari, D., Nurmiyanto, A., & Rahayu, A. (2021). Penurunan Kandungan Hidrokarbon Menggunakan Constructed Wetland Reactor Dalam Mengolah Limbah Minyak Removal of Hydrocarbon Compounds Using Constructed Wetland Reactor to Treat Oily Wastewater. *Open Science and Technology*, 01(02), 246–256.
- Hadrah, H., Kasman, M., & Septiani, K. T. (2019). Analisis Penurunan Parameter Pencemar Limbah Cair Laundry dengan Multi Soil Layering (MSL). *Jurnal Daur Lingkungan*, 2(1), 36. <https://doi.org/10.33087/daurling.v2i1.22>
- Hanum, Farrah Fadhillah; Rahayu, A. (2022). Studi Pemanfaatan dan Metode Pemisahan Silika dari Coal Fly Ash A Study for Silika Utilization and Its Separation Method from. *Open Science and Technology*, 02(01), 26–32.
- Haribowo, R., Megah, S., & Rosita, W. (2019). Efisiensi Sistem Multi Soil Layering Pada Pengolahan Air Limbah Domestik Pada Daerah Perkotaan Padat Penduduk. *Jurnal Teknik Pengairan*, 10(1), 11–27. <https://doi.org/10.21776/ub.pengairan.2019.010.01.2>
- Harimu, L., Haetami, A., Sari, C. P., Haeruddin, H., & Nurlansi, N. (2020). Perbandingan Kemampuan Aerasi Sembur (Spray) dengan Metode Adsorpsi Menggunakan Adsorben Serbuk Kulit Buah Kakao untuk Menurunkan Kadar Besi dan Mangan Pada Air Sumur Gali. *Indo. J. Chem. Res.*, 8(2), 137–143. <https://doi.org/10.30598/ijcr.2020.8-hrm>
- Hartaja, N. I. S. dan D. R. K. (2015). Pengolahan Air Lindi Dengan Proses Biofilter Anaerob-Aerob Dan Denitrifikasi. *Pusat Teknologi Lingkungan, BPPT*, 8(1).
- Herman, W., Darmawan, D., & Gusnidar, G. (2017). Pemanfaatan Tanah Vulkanik Dalam Sistem Multiple Soil Layering (MSL) Terhadap Pemurnian Air Irigasi Terpolusi. *Jurnal Bibiet*, 2(2), 49–59. <https://doi.org/10.22216/jbbt.v2i1.3085>
- Hong, Y., Huang, G., An, C., Song, P., Xin, X., Chen, X., Zhang, P., Zhao, Y., & Zheng, R. (2019). Enhanced nitrogen removal in the treatment of rural domestic sewage using vertical-flow multi-soil-layering

- systems: Experimental and modeling insights. *Journal of Environmental Management*, 240(November 2018), 273–284. <https://doi.org/10.1016/j.jenvman.2019.03.097>
- Ihsan, T., Indah, S., & Denny, H. (2013). Penyisihan Kalium dari Limbah Cair Persawahan dengan Metode Multi Soil Layering (MSL). *Jurnal Teknik Lingkungan*, 10(2), 133–141.
- Kasman, M., Herawati, P., & Hadrah, H. (2021). Pengaruh Hydraulic Loading Rate (HLr) Terhadap Pengolahan Leachate Dengan Menggunakan Metoda Multi Soil Layering (Msl). *Sustainable Environmental and Optimizing Industry Journal*, 1(2), 1–8. <https://doi.org/10.36441/seoi.v1i2.178>
- Komala, P. S., Helard, D., & Delimas, D. (2012). Identification of Anaerobic Dominant Microbes in Rubber Industrial Waste Water Treatment With Multi Soil Layering (MSL) System. *Jurnal Teknik Lingkungan UNAND*, 9(1), 74–88.
- Koottatep, T., Pussayanavin, T., Khamyai, S., & Polprasert, C. (2021). Performance of novel constructed wetlands for treating solar septic tank effluent. *Science of the Total Environment*, 754(6). <https://doi.org/10.1016/j.scitotenv.2020.142447>
- Lamzouri, K., Mahi, M., Ouatar, S., Bartali, E., Masunaga, T., Latrach, L., & Mandi, L. (2016). Application of Multi-Soil-Layering Technique for Wastewater Treatment in Moroccan Rural Areas: Study of Tehe Operation Process for an Engineering Design. *Journal of Materials and Environmental Science*, 7(2), 579–585.
- Latrach, L., Masunaga, T., Ouazzani, N., Hejjaj, A., Mahi, M., & Mandi, L. (2014). Removal of bacterial indicators and pathogens from domestic wastewater by the multi-soil-layering (MSL) system. *Soil Science and Plant Nutrition*, 61(2), 337–346. <https://doi.org/10.1080/00380768.2014.974480>
- Latrach, L., Ouazzani, N., Masunaga, T., Hejjaj, A., Bouhoum, K., Mahi, M., & Mandi, L. (2016). Domestic wastewater disinfection by combined treatment using multi-soil-layering system and sand filters (MSL-SF): A laboratory pilot study. *Ecological Engineering*, 91, 294–301. <https://doi.org/10.1016/j.ecoleng.2016.02.036>
- Latupeirissa, J., & Fransina, E. G. (2014). *THE CHARACTERIZATION OF CLAYS FROM LATUHALAT VILLAGE ACTIVATED USING AMMONIUM NITRATE Karakterisasi Lempung Asal Desa Latuhalat Yang Teraktivasi Amonium Nitrat*. 78–82.
- Maryudi, M., Rahayu, A., Syauqi, R., & Islami, M. K. (2021). Teknologi Pengolahan Kandungan Kromium dalam Limbah Penyamakan Kulit Menggunakan Proses Adsorpsi: Review. *Jurnal Teknik Kimia Dan Lingkungan*, 5(1), 90. <https://doi.org/10.33795/jtkl.v5i1.207>
- Megah, S., & Haribowo, R. (2016). *Efisiensi Pengolahan Limbah Domestik Menggunakan Metode Multi Soil Layering*.
- Mutia, R., Elystia, S., & Yenie, E. (2015). Metode Multi Soil Layering dalam Penyisihan Parameter TSS Limbah Cair Kelapa Sawit dengan Variasi Hydraulic Loading Rate (HLR) dan Material Organik pada Lapisan Anaerob. *Jurnal Online Mahasiswa Fakultas Teknik Universitas Riau*, 2(1), 1–6.
- Putra, A., & Fitri, W. E. (2018). Efektivitas Penurunan TSS, BOD, COD, Dan E.Coli Limbah Cair Industri

- Santan Kelapa Dengan Metode MSL (Multi Soil Layering) Yang Dimodifikasi. *Seminar Nasional Pelestarian Lingkungan (SENPLING) 2018*, 209–217.
- Putra, A., & Fitri, W. E. (2019). Efektivitas Multi Soil Layering Dalam Mereduksi Limbah Cair Industri Kelapa. *Dalton : Jurnal Pendidikan Kimia Dan Ilmu Kimia*, 2(2), 1–15.
<https://doi.org/10.31602/dl.v2i2.2394>
- Putri, V. D., & Dyna, F. (2019). Jurnal Katalisator. *Standarisasi Ganyong (Canna Edulis Kerr) Sebagai Pangan Alternatif Pasien Diabetes Mellitus*, 4(2), 111–118.
- Rahayu, A., Fadhilah Hanum, F., Aldilla Fajri, J., Dwi Anggraini, W., & Khasanah, U. (2021). Review: Pengolahan Limbah cair Industri dengan Menggunakan Silika A Review: Industrial Liquid Waste Treatment Using Silica. *Open Science and Technology*, 02(01), 2776–169.
<https://opscitech.com/journal>
- Rahayu, A., Lim, L. W., & Takeuchi, T. (2015). Preparation of a hybrid monolithic stationary phase with allylsulfonate for the rapid and simultaneous separation of cations in capillary ion chromatography. *Journal of Separation Science*, 38(7), 1109–1116. <https://doi.org/10.1002/jssc.201401264>
- Sbahi, S., Ouazzani, N., Latrach, L., Hejjaj, A., & Mandi, L. (2020). Predicting the concentration of total coliforms in treated rural domestic wastewater by multi-soil-layering (MSL) technology using artificial neural networks. *Ecotoxicology and Environmental Safety*, 204.
<https://doi.org/10.1016/j.ecoenv.2020.111118>
- Sidebang, C. P., & Syafnil. (2017). Use of Sand as a Component of Multi Soil Layering (MSL) System to Minimize Liquid Waste Contaminant of Crude Palm Oil (CPO). *Jurnal Agro Industri*, 7(2), 115–124.
- Silalahi, I. H. (2017). *ADSORPSI Hg (II) MENGGUNAKAN Sargassum crassifolium DENGAN ADANYA Pb (II), Cu (II) DAN Fe (II) Adsorption of Hg (II) by Using Sargassum crassifolium With Presence of Pb (II), Cu (II) And Fe (II)*. 5(1), 7–11.
- Song, P., Huang, G., An, C., Shen, J., Zhang, P., Chen, X., Shen, J., Yao, Y., Zheng, R., & Sun, C. (2018). Treatment of rural domestic wastewater using multi-soil-layering systems: Performance evaluation, factorial analysis and numerical modeling. *Science of the Total Environment*, 644, 536–546. <https://doi.org/10.1016/j.scitotenv.2018.06.331>
- Song, P., Huang, G., Hong, Y., An, C., Xin, X., & Zhang, P. (2020). A biophysiological perspective on enhanced nitrate removal from decentralized domestic sewage using gravitational-flow multi-soil-layering systems. *Chemosphere*, 240. <https://doi.org/10.1016/j.chemosphere.2019.124868>
- Swesty, N., Zein, R., & Zilfa, Z. (2019). Penjernihan Air Sumur Menuju Air Layak Minum Dengan Metoda Lapisan Multi Media (LMM). *Jurnal Riset Kimia*, 10(1), 9–19.
<https://doi.org/10.25077/jrk.v12i2.297>
- Sy, S., Muchtar, H., Sofyan, & Kasman, M. (2017). The Effect of MSL Reactor Influent Flow Rate on Reduction of BOD, COD, TSS and Oils/Fats of Edible Oil Industry Wastewater. *Jurnal Litbang Industri*, 7(1), 41–51.

Indonesian Journal of Chemical Research

<http://ojs3.unpatti.ac.id/index.php/ijcr>

Indo. J. Chem. Res., vol(issue), page, year

Wibowo, D. N., Wicaksono, R., & Naufalin, R. (2019). Application of Multi Soil Layer Type of Batik Liquid Waste Treatment Units and Phytoremediation on Batik SME of Binangun, Banyumas. *Prosiding Seminar Nasional Dan Call for Papers*, 8, 19–20.

Lampiran 2



 Indonesian Journal of Chemical Research
Review Result
To: aster.rahayu@che.uad.ac.id

Printing 9 September 2022 18:20

Dear Authors

We have received the review result. Please check your account on this journal.

1. Please revise your manuscript according to the reviewer comments
2. You should be citing at least three (3) articles from the Indonesian Journal of Chemical research

Note: Your revision has to send 12 September 2022

Thank you

Dr. I Wayan Sutapa

Editor in chief

WA: 08134300197

Multi Soil layering Method for Wastewater Treatment: Review

Commented [U23]: Check preposition

Aster Rahayu^{1*}, Irwan Mulyadi¹, Joni Aldilla Fajri², Siti Jamilatun¹, Nurul Wulandari¹, Yuni Marlana¹, Devi Yogi Noviana Ningsih¹, Lee Wah Lim³

¹Department of Chemical Engineering Department, Faculty of Industrial Technology, Universitas Ahmad Dahlan, Jl. Ringroad Selatan, Tamanan, Banguntapan, Bantul, D. I. Yogyakarta, Indonesia

²Department of Environmental Engineering, Faculty of Civil and Planning Engineering Universitas Islam Indonesia, Jl. Kaliurang KM 14,5, Sleman, Yogyakarta, Indonesia

³Department of Biomolecular Science, Faculty of Engineering, Gifu University, Yanagido 1-1, Gifu, Japan

*Corresponding author: aster.rahayu@che.uad.ac.id

Received:
Received in revised:
Accepted:
Available online:

Abstract

Liquid waste is the main source of contamination of water bodies, especially in river water. This pollution causes decreased water quality in water bodies. One of the treatments in wastewater treatment is to use the Multi Soil Layering (MSL) method. Because using the Multi Soil Layering (MSL) method is known to be inexpensive in terms of cost, easy to implement, does not require complicated maintenance so that it can be used continuously and is also environmentally friendly. One of the constituent materials of the MSL reactor is andesol soil, gravel, and perlite. MSL has two zones for wastewater treatment, namely the aerobic zone and the anaerobic zone. This journal review aims to compare the efficiency of reducing the levels of pollutant parameters from aerobic and anaerobic processes in the Multi Soil Layering (MSL) method in wastewater.

Commented [U24]: This review

Keywords: Aerobic, Anaerobic, Multi soil layering, Wastewater treatment.

INTRODUCTION

The MSL method is a wastewater treatment method that utilizes the ability of the soil as the main medium to reduce pollutant parameters and how to maximize the function of the soil, which is formed into a structure made in a construction consisting of a mixture of soil (organic) and rock composition. shaped like the arrangement of bricks. The composition of the soil mixture is usually made of selected soil, carbon, and others as well as for rock layers composed of additional materials such as rice

husks, sawdust, zeolite, perlite, gravel, and depending on the type of rock available (Latrach et al., 2016; Putra & Fitri, 2018, 2019).

In principle, the MSL method has the main treatment zones, namely the aerobic and anaerobic zones. The aerobic zone usually consists of rock (zeolite, gravel, perlite) while the anaerobic zone usually consists of a mixed layer of soil and activated carbon (charcoal) (Adinda and Elystia, 2015; Akhyar et al., 2016; Latrach et al., 2014; Mutia, Elystia, and Yenie, 2015).

Commented [U25]: Check grammarly

Commented [U26R25]: Check grammarly and capital letter management

Multi soil layering (MSL) is a method of treating wastewater that is effective and efficient, easy and inexpensive without having to incur expensive costs (An et al., 2016; Latrach et al., 2014; Megah and Haribowo, 2016). Currently, the Multi Soil Layering (MSL) method has been widely used as an alternative in wastewater treatment which has been proven to be effective in treating domestic wastewater and small industries (Hadrah et al., 2019; Sy et al., 2017). (Kasman, Herawati, and Hadrah 2021).

One example of domestic wastewater that contain of several pollutant such as NO_3^- ; treated with the MSL method is wastewater from the rest of household activities. The rest of household activities pollute the community environment through substances contained in wastewater which is very dangerous if not handled properly, in addition to household wastewater there is also wastewater from small home industries such as the laundry industry, industrial home batik, coconut industry, screen printing industry. Similarly, industrial wastewater such as leather and weaving industry, containing some harmful pollutants that necessary to be treated. especially with adsorption method. Leather industry that hold some amount of coppers must be removed before spreading the undesirable effect to the environment (Maryudi et al., 2021).

From previous studies, the Multi Soil Layering (MSL) method has succeeded in reducing levels of biological pollutant parameters such as BOD, COD, TSS, DO, Ph, odor, and turbidity as well as heavy metal pollutant parameters such as Fe, Mn, and phosphate (Putri & Dyna, 2019). In numerous of studies, domestic wastewater can reduce BOD by about 68.67-87.63%, COD around 71.42-87.73%, and TSS around 69.11-77.12% The

cooking oil industry, it can reduce BOD levels around 86-99%, COD around 71-96%, TSS around 77-88%, and pH from 6.37-6.95 to 6.99-7.24 (Sbahi et al., 2020).

This journal review aims to compare the efficiency of reducing levels of pollutant parameters from aerobic and anaerobic processes in the Multi Soil Layering (MSL) method in wastewater.

MULTI SOIL LAYERING

Multi Soil Layering (MSL) is a method used in the wastewater treatment process. The wastewater treatment process using this method is known to be inexpensive in terms of cost, easy to implement, does not require complicated maintenance so that it can be used continuously and is also environmentally friendly. In addition, the materials used in the MSL reactor are widely available and easy to find in Indonesia because the materials used can be obtained in nature and the environment around coconut charcoal, zeolite, rice husks, sawdust, activated charcoal from various organic materials and coatings. Anaerobic soil consists of andesol originating from the mountains, while perlite and gravel are the aerobic layers (Aldilla Fajri et al., 2018)

In wastewater treatment using the MSL method, soil is used as the main medium to reduce pollutant parameters and enhance soil function through its structure (Haribowo et al., 2019; Lamzouri et al., 2016; Mutia, Elystia, and Yenie, 2015; Song et al., 2018).

MSL method formed to become a reactor consisting of a mixed layer of soil and rock layers arranged like bricks. The composite layer of soil consists of organic matter, carbon elements found in charcoal, and other additives such as iron filings. Commonly used mixed layers such as

Commented [U27]: See the journal template. Separate 2 references by using ;

Commented [U28]: pH?

perlite, gravel, and zeolite also depend on the type of rock contained in the composition of the bricks. Zeolite or perlite which containing silica group could support the better performance during adsorption process (Hanum, Farrah Fadhillah; Rahayu, 2022; Rahayu et al., 2015, 2021). The effective use period for the MSL system for waste treatment is 12.8 years (Ihsan et al., 2013). (Nadhirah, Riyanto, and Tri., 2021).

Based on the principle of the MSL method, there are two zones used in processing, namely the aerobic zone contained in the rock layer (perlite, gravel, and zeolite also depending on the type of rock present) and between the zeolite layer and soil mixture blocks. The function of the aerobic zone is to decompose organic matter, bind phosphate, oxidize/oxidise ferrous ions to ferric ions, and nitrify. The mixed

soil layer is in the anaerobic area. Using MSL, the wastewater treatment process consists of decomposition, filtration, fixation, nitrification, denitrification, absorption, and adsorption (Adinda & Elystia, 2015; Herman et al., 2017).

Numerous researches related on wastewater treatment using the Multi Soil Layering (MSL) which uses many compositions from the reactor making material and lots of samples have been tested. Some parameters are investigated from all research parameters that are often sought are as COD, BOD, TSS, ph, turbidity, odour, colour, Ammonia, nitrate, nitrite, potassium phosphate and metals such as Mn, Pb, Hg and Fe. Tabel 1 shown the composition of Multi Soil Layering (MSL):

Table 1. Multi Soil Layering (MSL) composition

| No | Composition | Waste Type | Aerobic/anaerobic MSL conditions | Success | Ref |
|----|--|--------------------------------|----------------------------------|---|-----------------------|
| 1 | Coconutshell activated charcoal,perlite,gravel, rice husk, and Andasol soil. (With variations of HLR5,10,20,40ml/min) | Coconut industrial waste water | Aerobes and Anaerobes | BOD (35.68 - 20.13 and 13.53-33.01) COD (20.13 - 84.62 and 69.23-88.62) Turbidity (84.76 - 97.99 and 88.35-98.66) E.coli (99.25 - 99.92 and 25-99.92) | (Putra & Fitri, 2018) |

Commented [U29]: Check journal reference system 😊.
Please apply that for all text reference.

| | | | | | |
|---|--|--|-----------------------|--|--|
| 2 | Coconut shell activated charcoal, perlite, gravel, rice husk, and Andasol soil.(With variations of HLR 5, 10, 20, 40 ml/min) | Coconut milk liquid waste | Aerobes and Anaerobes | Phosphate (99.28- 99.80 and 99.82 99.87) Nitrite (68.06 - 76.39 and 67.36- 74.31) Sulfate (96.97- 97.48 and 86.56- 97.30) Chloride (75.44– 85.51 and 82.99- 88.66) Manganese (Mn) (79.44 – 94.39 and 49.77- 80.61) Iron(Fe) (92.11– 97.50 and 94.41- 98.82) | (Putra & Fitri, 2019) |
| 3 | Crushed stone, perlite, Andasol soil, gravel, banana peel charcoal and coconut shell charcoal (Variation HLR 500,700,900 l/m ² day) | District peat water Tapung Kampar Regency | Anaerobic | Mn metal (36.65-55.83) Turbidity (63.86- 61.45) Ph (6.51-6.82) | (Adinda & Elystia, 2015) |
| 4 | MSL A reactor (Andasol soil, zeolite and quartz sand) MSL B reactor (Andasol soil, isthmus and pumice stone) | Sasirangan industrial liquid waste | | BOD (63.89%) COD (65.6%) | (Akhyar Okviyoandra, Antoni Pardede, 2016) |
| 5 | Gravel, perlite, ground activated charcoal of Kalapa shell and activated charcoal of banana peel. | Palm oil effluent in anaerobic pond II (outlet) WWTP PT. Nusantara V | Anaerobic | TSS (coconut) = (79.77-88.76) Ammonia (coconut) = (39.85-56.52) | (Mutia et al., 2015) |

| | | | | | |
|---|--|--|--|---|--------------------------|
| | <p>Reactor 1 MSL : Anaerobic layer of coconut shell activated charcoal and soil</p> <p>Reactor 2 MSL : Anaerobic layer of activated charcoal banana peel and soil</p> <p>(Variation of HLR 500,750, and 1000 L/m².day)</p> | Sei Pagar Plantation, Riau. | | TSS (banana) = (73.03-79.77) | |
| 6 | <p>MSL1 reactor :Zeolite layer and gravel and gravel mixed with zeolite</p> <p>MSL2 reactor :(soil mixture layer (coconut shell activated charcoal and Andasol soil) + (Paddy straw activated charcoal and Andasol soil) + (sawdust and Andasol soil)</p> <p>(Coconut shell and Andasol soil layers are more efficient)</p> | Waste in the WWTP in RT.04 RW.07 Tlogomas Village. | | <p>pH (4.25-5.77)</p> <p>TSS (58.42-71.05)</p> <p>TDS (18.05-31.84)</p> <p>DO (75.06-81.88)</p> <p>Turbidity (72.91-76.69)</p> <p>Electrical Conductivity (16.49-31.77)</p> | (Megah & Haribowo, 2016) |
| 7 | <p>Crushed stone, gravel/zeolite, soil mixture, and plastic nets (with variations of hrl 500,750, and 1000 l/m².day)</p> <p>(more efficient eg with the addition of zeolite is better than without zeolite)</p> | Laundry Liquid Waste | | <p>COD (74-87)</p> <p>BOD (75-88)</p> <p>TSS (73-88)</p> <p>Total phosphate (20-78)</p> <p>pH (6.73)</p> <p>MBA (85-95)</p> | (Hadrah et al., 2019) |

| | | | | | |
|----|---|--|-----------|---|-----------------------|
| 8 | Reactor 1 MSL : gravel and charcoal, mixed layer of andisol soil, and crushed stone. Reactor 2 MSL : Sawdust and gravel, mixed layer of andisol and crushed stone. | Domestic wastewater from cafeteria and kitchen at Kasetsart University, Bangkok | Anaerobic | Oils and Fats (27,778-89,474) | (Sy et al., 2017) |
| 9 | A mixture of andosol soil, zeolite rock, gravel, rice husk, coconut shell charcoal, and sawdust. (most effective with sawdust in lowering heavy metal indicators) | Dug well water and river or ditch water in Teluk Nilap Village, Kubu Babussalam, Rokan Hilir | | Ph (50) COD (31.16) BOD (73.16) Metal Hg (70.75) Metal Pb (26.74) Metal Fe (46.94) | (Putri & Dyna, 2019) |
| 10 | Reactor MSL 1: a layer of gravel mixed with activated charcoal with soil MSL 2 reactor: layer of gravel and sawdust with soil, | Rice Field Liquid Waste | Anaerobic | Potassium (19,443 – 100) | (Ihsan et al., 2013) |
| 11 | Andesole soil and charcoal | Hotel Liquid Waste | Anaerobic | COD (55-90) | (Dan et al., 2001) |
| 12 | Andisol soil, bagasse activated charcoal powder and fine bagasse powder | Tofu industrial liquid waste | Aerobic | TSS (86.86) BOD (78.87) COD (89.75) | (Dessy Novela, 2019) |
| 13 | lujuk, iron, sawdust, activated charcoal that has been sifted with a size of 50 mesh and volcanic soil (variation of HLR 250,500,1000 l/m ² /day) | Polluted water in Mount Nago Irrigation area of Pasar Baru, Cupak Tengah | Anaerobic | Ph(8) COD (97.21)-99.59) BOD (98.84-99.73) PO ₄ - (>0.03 ppm) | (Herman et al., 2017) |

Commented [U30]: Is there any term in English for ijuk?

| | | | | | |
|----|---|---|-----------------------|---|---|
| | | Village, Pauh IX District, Padang. | | NH4+ (<0.2 ppm) | |
| 14 | Zeolite, gravel sand, porous plate and outlet pipe, soil, charcoal and iron powder. | Synthetic waste in rural China | | COD (98.29) TP (100) NH4 (76.60) | (Hong et al., 2019) |
| 15 | Mixture of soil, crushed stone and zeolite | Leachate Liquid Waste | | COD (96.771%) Ammonia (99.966%) Fe (99.279%) Color (96.53%) pH 7.00 | (Lamzouri et al., 2016) |
| 16 | Gravel, zeolite, a mixture of soil and coconut shell charcoal | Ethanol Industrial Liquid Waste | | COD (80.85) BOD (94.68) TSS (83.99) | (Irmanto, Suyata and Zufahair, 2013) |
| 17 | Crushed stone, river pebbles, mixed soil and gravel | Leachate Liquid Waste | | COD (53.457) Ammonia (98,325) Fe (88.5) Ph 7.00 | (Kasman, M., Herawati, Peppy and Hadrah, H, 2021) |
| 18 | Sand, gravel, humus soil, coconut charcoal. (innovation with sand with HLR 0.3 ; 0.6 ; 0.9 and 1.2 L/hour) | Liquid waste (WWTP) the last pool of the CPO industry | | COD (89.06-97.47) BOD (88.61-98.37) Ph (6.72-7.36) Oil and Fat Content (88.27 - 95.48) | (Sidebang and Syafnil, 2017) |
| 19 | Volcanic soil, rice husk, coconut shell activated | The sample came from the well | Aerobes and Anaerobes | Turbidity (54.65 and 44.04) | (Song et al., 2020) |

| | | | | | |
|----|---|--|--|--|-----------------------|
| | charcoal, zeolite, iron powder. (variation of water rate (HLR) 10, 20, 40, 80 mL/min) | water of a resident in Jati, Padang. | | Mn (66.44 and 47.26) Nitrite (58.74 and 49.74) Nitrates (58.34 and 45.57) Ph (77 and 73) Odor (no smell) | |
| 20 | Sawdust, andisol soil, coarse gravel and fine gravel, and fine charcoal from coconut shells. | Cooking Oil Industry Liquid Waste | | BOD (98) COD (96) TSS (88) | (Swesty et al., 2019) |
| 21 | Silica sand, coconut husk, activated carbon, ginger coral, water hyacinth, fine zeolite, soil, coarse zeolite, gravel, and dacron | Batik liquid waste in Binangun Village, Banyumas District, Banyumas Regency. | | Ph (7.94) Chromium (29.41) Turbidity (low) Odor (low) | (Wibowo et al., 2019) |

Table 1 show that it can be seen that the percentage value for almost all parameters is close to perfect. In example, the COD results of 99.59% in the Mount Nago irrigation water sample in the Pasar Baru area, Cupak Tengah Village, Pauh IX District, Padang. The composition of the Multi Soil Layering (MSL) reactor is palm fibre, iron, sawdust, activated charcoal that has been sifted with a size of 50 mesh and volcanic soil with variations in HLR or flow rate of 250,500,1000 L/m².day with anaerobic process conditions (Hadrah et al., 2019). The BOD result was 98.8% in the Mount Nago irrigation water sample in the Pasar Baru area, Cupak Tengah Village, Pauh IX District, Padang. The composition of the Multi Soil

Layering (MSL) reactor is palm fibre, iron, sawdust, activated charcoal that has been sifted with a size of 50 mesh and volcanic soil and with variations in HLR or flow rate of 250,500,1000 L/m².day with anaerobic process conditions (Hadrah et al., 2019). The TSS results were 79.77% with banana peel activated carbon and 88.76% with coconut shell activated carbon in the sample of palm oil liquid waste in the anaerobic pond II (outlet) of IPAL PT. Nusantara V Sei Pagar Plantation, Riau. With the composition of gravel, pearlite, soil activated charcoal of Kalapa shell and activated charcoal of banana peel, in this research there are two innovations, namely by making two reactors with activated carbon of banana peel and

activated carbon of coconut shell where the reactor with the composition of activated charcoal of coconut shell is more effective, with HLR 500, 750, and 1000 L/m².day under anaerobic conditions (Megah and Haribowo, 2016). The yield of Fe metal is 99% and 99, 27% in samples of coconut milk liquid waste and Leachate liquid waste with reactor compositions Coconut shell activated charcoal, pearlite, gravel, rice husks, and Andasol soil and a mixture of soil, crushed stone and zeolite with an anaerobic process (Komala et al., 2012; Mutia, Elystia, and Yenie, 2015).

Manganese yield was 94.39% in coconut milk liquid waste samples with reactor compositions Coconut shell activated charcoal, pearlite, gravel, rice husks, and Andasol soil and with variations in HLR or flow rates of 5, 10, 20, 40, ml/minute with aerobic processes (Mutia, Elystia, and Yenie, 2015). It can be seen that the Multi Soil Layering (MSL) method can be used to treat industrial, household and other wastewater. With many reactor composition innovations that are easy to find around us.

From the parameters that have been tested, each shows the level of success. Some samples that have been tested show MSL conditions, some are aerobic, and some are anaerobic, some have two states at once. However, in MSL conditions, this dramatically affects the success rate. In addition to aerobic and anaerobic process conditions, variations in the Hydraulic Loading Rate (HLR) are also very influential on the success of the Multi Soil Layering method. There is still very little explanation of this condition in aerobic conditions because the aerobic process is less efficient for use in wastewater at high pollutant levels above 3000 mg/L.


AEROBIC

Aerobic or aerobic is a biological waste treatment that uses oxygen as a processing process. In the anaerobic process, the wastewater treatment process is carried out biologically; in the process, micro-organisms or bacteria are used to decompose certain pollutant compounds in a biological reactor (Aldilla Fajri et al., 2018; Harimu et al., 2020). Conditions are created to adjust the growth of micro-organisms or bacteria to be used. Based on the oxygen present in the heterotrophic bacteria environment, heterotrophic bacteria are therefore divided into two types, namely: Firstly, Absolute aerobic bacteria: i.e. bacteria that, if there is no oxygen in the environment, can not live. Secondly, Aerobic, facultative bacteria: bacteria that can grow even without oxygen, but if there is oxygen in their environment, they will show faster growth. Factors that can affect the wastewater treatment process using aerobic such as hydrocarbon, oxygen, the composition of microorganisms, pH, temperature, and nutrients (Fajri et al., 2021).

Aerobic bacteria used in wastewater treatment processes contain organic pollutants and other chemical compounds such as sulfides and ammonia. In this process, these compounds will be decomposed first to produce neutral and more environmentally friendly compounds. The aerobic decomposition process can be seen as follows:

Organic Decomposition Reaction:

Organic Pollutant
Compound





Commented [U31]: ???



Oxygen (O₂)

Heterotrophic

Nitrification Reaction:



Sulfur Oxidation Reaction:



Based on these chemical reactions, it can be seen that oxygen is very influential because oxygen is needed to decompose pollutants, and the amount of oxygen required is proportional to the amount of organic, sulfide and ammonia present in wastewater (Hartaja, 2015). There are advantages in the aerobic process: the reaction is faster than the anaerobic process, and organic

pollutants can be degraded to deficient concentrations. Not only has its advantages, the wastewater treatment process carried out aerobically also has several disadvantages (Kasman et al., 2021). It takes much energy to supply oxygen to a wastewater treatment reactor, and the operating costs are high. During the process, the mud will appear so that it requires further handling and requires a relatively expensive cost. On the other hand, less efficient when used in wastewater with high levels of pollutants or waste above 3000 mg/l.

In treating wastewater using an aerobic method, it can reduce the level of danger from the water with the success rate of each and the type of each waste with variations in the Hydraulic Loading Rate (HLR) in each process. The following is a table of the success rate of the aerobic process:

Table 2. The success rate of aerobic methods in wastewater treatment

| No | Waste Type | Waste Content | Level of success (%) | Ref |
|----|------------------------------------|--|--|-------------------------|
| 1 | Coconut milk industry liquid waste | BOD COD Turbidity E. coli | 35.68 - 20.13 20.13 - 84.62 84.76 - 97.99 99.25 - 99.92 | (Putra and Fitri, 2018) |
| 2 | Coconut industry liquid waste | Phosphate Nitrite Sulfate Chloride Manganese (Mn) Iron (Fe) | 99.28 - 99.80 68.06 - 76.39 96.97 - 97.48 75.44 - 85.51 79.44 - 94.39 92.11 - 97.50 | (Putra and Fitri, 2019) |

| | | | | |
|---|--|-----------|----------|-----------------------|
| 3 | Tofu industrial liquid waste | TSS | 86.86 | (Dessy Novela, 2019) |
| | | BOD | 78.87 | |
| | | COD | 89.75 | |
| 4 | The sample came from the well water of a resident in Jati, Padang. | Turbidity | 54.63 | (Wibowo et al., 2019) |
| | | M N | 66.44 | |
| | | Nitrite | 58.74 | |
| | | Nitrate | 58.34 | |
| | | Ph | 77 | |
| | | Smell | No smell | |





Table 2 shows that the highest BOD value is 78.7 in the aerobic process, which this process tests samples of tofu industrial waste. . Factors that influence this process are variations Hydraulic Loading Rate (HLR) or water rate and reactor composition. At the highest COD value of 89.75 which this parameter is also shown in the tofu industrial waste test. Factors that influence this process are variations Hydraulic Loading Rate (HLR) or water rate and reactor composition.

ANAEROBIC

Anaerobic or anaerobic is a process that does not involve free oxygen as an oxidant. Anaerobic processing is carried out using microorganisms. In wastewater treatment the use of microorganisms has a fairly high content of organic matter, so it is very potential if developed. Microorganisms can directly use the wastewater as nutrients for growth. Anaerobic microorganisms are sensitive to oxygen, because they can inhibit growth (Hartaja, 2015; Koottatep et al., 2021).

Methane gas is obtained from an anaerobic process that has gone through various stages.

The anaerobic process produces single carbon compounds because almost all organic polymers can be decomposed into single carbon compounds. The decomposition stage includes 2 stages, namely the stage of formation of methane (gasification) and the stage of formation of asa (adification). The formation of methane gas comes from acetic acid, H₂ and CO₂. In addition, it can result from the conversion of formic acid and methanol (Hartaja, 2015).



The anaerobic process has several advantages include:

- Energy saving, because the decomposition process of organic pollutants by microbes is carried out without using air, so energy is not needed to supply air as occurs in aerobic

Commented [U32]: Unit?

processes (Hartaja, 2015).

- Produce biogas (methane gas). The final breakdown of pollutant products, namely methane gas which can be used as gas fuel, can be used for power generators and also in steam generator boilers (Hartaja, 2015).
- Can treat waste with high concentrations such as BOD up to 80,000 mg/l (Hartaja, 2015).

In addition to advantages, the anaerobic wastewater treatment process has several disadvantages include:

- Slow pollutant decomposition reaction (Komala et al., 2012).
- Sensitive if exposed to air, temperature and load fluctuations (Komala et al.,

2012).

- If treating low concentration waste is less effective, such as BOD below 3,000 mg/l (Komala et al., 2012).
- In the development of biomass to be used it takes a long time in start-up (Komala et al., 2012).

In the anaerobic process, it is known that the pollutant reaction rate is fundamentally influenced by the number of bacteria. In addition, the degradation process will take place quickly if given the addition of nutrients such as nitrogen and phosphate compounds. The anaerobic process will be disrupted if there are chemicals such as cyanide compounds, sulfur, and heavy metals. The following is a table of the success rate of the anaerobic process:

Commented [U33]: Too long sentence

Table 3. The success rate of anaerobic methods in wastewater treatment

| No | Waste Type | Waste Content | Level of success | Ref |
|----|------------------------------------|--|--|--------------------------|
| 1 | Peat Water Treatment | pH Mn . metal Turbidity | 6.51-6.82 36,6555,83 63.86-61.45 | (Adinda & Elystia, 2015) |
| 2 | Coconut industry liquid waste | Phosphate Nitrite Sulfate Chloride Manganese (Mn) Iron (Fe) | 99.82-99.87 67.36-74.31 86.56-97.30 82.99-88.66 49.77-80.61 94.41-98.82 | (Putra & Fitri, 2019) |
| 3 | Coconut milk industry liquid waste | BOD COD Turbidity E. coli | 13.53-33.01 69.23-88.62 88.35-98.66 25-99.92 | (Mutia et al., 2015) |

| | | | | |
|---|---|---|---|-----------------------|
| 4 | Palm Oil Liquid Waste | TSS (coconut) TSS (banana) Ammonia (coconut) | 79.77 – 88.76 73.03-79.77 39.85 – 56.52 | (Mutia et al., 2015) |
| 5 | Domestic wastewater from cafeteria and kitchen at Kasetsart University, Bangkok | Oils and Fats | 27,778-89,474 | (Sy et al., 2017) |
| 6 | Rice Field Liquid Waste | Potassium | 19,433 -100 | (Ihsan et al., 2013) |
| 7 | Hotel Liquid Waste | COD | 55-90 | (Dan et al., 2001) |
| 8 | Polluted water in Mount Nago Irrigation area of Pasar Baru, Cupak Tengah Village, Pauh IX District, Padang. | Ph COD BOD PO4- NH4+ | 8 97.21)-99.59 98.84-99.73 (>0.03 ppm <0.2ppm | (Herman et al., 2017) |
| 9 | The sample came from the well water of a resident in Jati, Padang. | Turbidity M N Nitrite Nitrate Ph Smell | 44.04 47.26 49.74 45.57 73 No smell | (Song et al., 2020) |

Based on table 3, anaerobic msl conditions have been tested with several different samples and waste content which includes potassium, TSS (coconut), TSS (banana), ammonia, BOD, COD, turbidity, E. coli, phosphate, nitrite, Sulfate, Chloride, Manganese (Mn), Iron (Fe), Turbidity, Mn, Nitrate, Ph, Odor, Odorless, Oil and Fat, PO_4^- , NH_4^+ and metal Mn (Latupeirissa & Fransina, 2014; Silalahi, 2017). Adinda, T., & Elystia, S. (2015). *Metoda Multi Soil Layering Dalam Pengolahan Air Gambut Dengan Variasi Hydraulic Loading Rate Dan Material Organik Pada Lapisan Anaerob*. 2(1), 1–7.

Commented [U34]: Unfinished article.. Where is the conclusion?

Akhyar Okviyoandra, Antoni Pardede, and R. R. A. A. K. W. (2016). Penurunan Bod Dan Cod Pada Limbah Cair Sasirangan Menggunakan Metoda Multi Soil Layering (Msl). *Media Sains*, 9(2), 162–166.

Aldilla Fajri, J., Fujisawa, T., Trianda, Y., Ishiguro, Y., Cui, G., Li, F., & Yamada, T. (2018). Effect of Aeration Rates on Removals of Organic Carbon and Nitrogen in Small Onsite Wastewater Treatment System (Johkasou). *MATEC Web of Conferences*, 147. <https://doi.org/10.1051/mateconf/201814704008>

An, C. J., McBean, E., Huang, G. H., Yao, Y., Zhang, P., Chen, X. J., & Li, Y. P. (2016). Multi-soil-layering systems for wastewater treatment in small and remote communities. *Journal of Environmental Informatics*, 27(2), 131–144. <https://doi.org/10.3808/jei.201500328>

Dan, E., Penyerapan, K., Ash, F. L. Y., Edwin, T., Elystia, S., Amelia, D., Indah, S., & Helard, D. (2001). *PENYISIHAN MINYAK DAN LEMAK DARI LIMBAH CAIR HOTEL DENGAN METODE MULTI SOIL LAYERING (MSL) satu sumber limbah cair domestik*. Gubernur Sumatera Barat Nomor 26 Tahun 2001 tentang Baku Mutu Limbah Cair Bagi Kegiatan Hotel di yang telah mengujicobakan meto.

Dessy Novela, I. D. (2019). Penurunan COD, BOD DAN TSS Pada Limbah Cair Industri Tahu Melalui Sistem Multy Soil Layering (MSL) Menggunakan Arang Karbon Ampas Tebu. *Journal of Residu*, 3(21), 8–14.

Fajri, J. A., Wulandari, D., Nurmiyanto, A., & Rahayu, A. (2021). Penurunan Kandungan Hidrokarbon Menggunakan Constructed Wetland Reactor Dalam Mengolah Limbah Minyak Removal of Hidrocarbon Compounds Using Constructed Wetland Reactor to Treat Oily Wastewater. *Open Science and Technology*, 01(02), 246–256.

Hadrah, H., Kasman, M., & Septiani, K. T. (2019). Analisis Penurunan Parameter Pencemar Limbah Cair Laundry dengan Multi Soil Layering (MSL). *Jurnal Daur Lingkungan*, 2(1), 36. <https://doi.org/10.33087/daurling.v2i1.22>

Hanum, Farrah Fadhillah; Rahayu, A. (2022). Studi Pemanfaatan dan Metode Pemisahan Silika dari Coal Fly Ash A Study for Silika Utilization and Its Separation Method from. *Open Science and Technology*, 02(01), 26–32.

Haribowo, R., Megah, S., & Rosita, W. (2019). Efisiensi Sistem Multi Soil Layering Pada Pengolahan Air Limbah Domestik Pada Daerah Perkotaan Padat Penduduk. *Jurnal Teknik Pengairan*, 10(1), 11–27. <https://doi.org/10.21776/ub.pengairan.2019.010.01.2>

Harimu, L., Haetami, A., Sari, C. P., Haeruddin, H., & Nurlansi, N. (2020). Perbandingan

- Kemampuan Aerasi Sembur (Spray) dengan Metode Adsorpsi Menggunakan Adsorben Serbuk Kulit Buah Kakao untuk Menurunkan Kadar Besi dan Mangan Pada Air Sumur Gali. *Indo. J. Chem. Res.*, 8(2), 137–143. <https://doi.org/10.30598//ijcr.2020.8-hrm>
- Hartaja, N. I. S. dan D. R. K. (2015). Pengolahan Air Lindi Dengan Proses Biofilter Anaerob-Aerob Dan Denitrifikasi. *Pusat Teknologi Lingkungan, BPPT*, 8(1).
- Herman, W., Darmawan, D., & Gusnidar, G. (2017). Pemanfaatan Tanah Vulkanik Dalam Sistem Multiple Soil Layering (MSL) Terhadap Pemurnian Air Irigasi Terpolusi. *Jurnal Bibiet*, 2(2), 49–59. <https://doi.org/10.22216/jbvt.v2i1.3085>
- Hong, Y., Huang, G., An, C., Song, P., Xin, X., Chen, X., Zhang, P., Zhao, Y., & Zheng, R. (2019). Enhanced nitrogen removal in the treatment of rural domestic sewage using vertical-flow multi-soil-layering systems: Experimental and modeling insights. *Journal of Environmental Management*, 240(November 2018), 273–284. <https://doi.org/10.1016/j.jenvman.2019.03.097>
- Ihsan, T., Indah, S., & Denny, H. (2013). Penyisihan Kalium dari Limbah Cair Persawahan dengan Metode Multi Soil Layering (MSL). *Jurnal Teknik Lingkungan*, 10(2), 133–141.
- Kasman, M., Herawati, P., & Hadrah, H. (2021). Pengaruh Hydraulic Loading Rate (Hlr) Terhadap Pengolahan Leachate Dengan Menggunakan Metoda Multi Soil Layering (Msl). *Sustainable Environmental and Optimizing Industry Journal*, 1(2), 1–8. <https://doi.org/10.36441/seoi.v1i2.178>
- Komala, P. S., Helard, D., & Delimas, D. (2012). Identification of Anaerobic Dominant Microbes in Rubber Industrial Waste Water Treatment With Multi Soil Layering (MSL) System. *Jurnal Teknik Lingkungan UNAND*, 9(1), 74–88.
- Koottatep, T., Pussayanavin, T., Khamyai, S., & Polprasert, C. (2021). Performance of novel constructed wetlands for treating solar septic tank effluent. *Science of the Total Environment*, 754(6). <https://doi.org/10.1016/j.scitotenv.2020.142447>
- Lamzouri, K., Mahi, M., Ouatar, S., Bartali, E., Masunaga, T., Latrach, L., & Mandi, L. (2016). Application of Multi-Soil-Layering Technique for Wastewater Treatment in Moroccan Rural Areas: Study of Tehe Operation Process for an Engineering Design. *Journal of Materials and Environmental Science*, 7(2), 579–585.
- Latrach, L., Masunaga, T., Ouazzani, N., Hejjaj, A., Mahi, M., & Mandi, L. (2014). Removal of bacterial indicators and pathogens from domestic wastewater by the multi-soil-layering (MSL) system. *Soil Science and Plant Nutrition*, 61(2), 337–346. <https://doi.org/10.1080/00380768.2014.974480>
- Latrach, L., Ouazzani, N., Masunaga, T., Hejjaj, A., Bouhoum, K., Mahi, M., & Mandi, L. (2016). Domestic wastewater disinfection by combined treatment using multi-soil-layering system and sand filters (MSL-SF): A laboratory pilot study. *Ecological Engineering*, 91, 294–301. <https://doi.org/10.1016/j.ecoleng.2016.02.036>
- Latupeirissa, J., & Fransina, E. G. (2014). *THE CHARACTERIZATION OF CLAYS FROM*

LATUHALAT VILLAGE ACTIVATED USING AMMONIUM NITRATE Karakterisasi Lempung Asal Desa Latuhalat Yang Teraktivasi Amonium Nitrat. 78–82.

- Maryudi, M., Rahayu, A., Syauqi, R., & Islami, M. K. (2021). Teknologi Pengolahan Kandungan Kromium dalam Limbah Penyamakan Kulit Menggunakan Proses Adsorpsi: Review. *Jurnal Teknik Kimia Dan Lingkungan*, 5(1), 90. <https://doi.org/10.33795/jtkl.v5i1.207>
- Megah, S., & Haribowo, R. (2016). *Efisiensi Pengolahan Limbah Domestik Menggunakan Metode Multi Soil Layering*.
- Mutia, R., Elystia, S., & Yenie, E. (2015). Metode Multi Soil Layering dalam Penyisihan Parameter TSS Limbah Cair Kelapa Sawit dengan Variasi Hydraulic Loading Rate (HLR) dan Material Organik pada Lapisan Anaerob. *Jurnal Online Mahasiswa Fakultas Teknik Universitas Riau*, 2(1), 1–6.
- Putra, A., & Fitri, W. E. (2018). Efektivitas Penurunan TSS, BOD, COD, Dan E.Coli Limbah Cair Industri Santan Kelapa Dengan Metode MSL (Multi Soil Layering) Yang Dimodifikasi. *Seminar Nasional Pelestarian Lingkungan (SENPLING) 2018*, 209–217.
- Putra, A., & Fitri, W. E. (2019). Efektivitas Multi Soil Layering Dalam Mereduksi Limbah Cair Industri Kelapa. *Dalton : Jurnal Pendidikan Kimia Dan Ilmu Kimia*, 2(2), 1–15. <https://doi.org/10.31602/dl.v2i2.2394>
- Putri, V. D., & Dyna, F. (2019). Jurnal Katalisator. *Standarisasi Ganyong (Canna Edulis Kerr) Sebagai Pangan Alternatif Pasien Diabetes Mellitus*, 4(2), 111–118.
- Rahayu, A., Fadhillah Hanum, F., Aldilla Fajri, J., Dwi Anggraini, W., & Khasanah, U. (2021). Review: Pengolahan Limbah cair Industri dengan Menggunakan Silika A Review: Industrial Liquid Waste Treatment Using Silica. *Open Science and Technology*, 02(01), 2776–169. <https://opscitech.com/journal>
- Rahayu, A., Lim, L. W., & Takeuchi, T. (2015). Preparation of a hybrid monolithic stationary phase with allylsulfonate for the rapid and simultaneous separation of cations in capillary ion chromatography. *Journal of Separation Science*, 38(7), 1109–1116. <https://doi.org/10.1002/jssc.201401264>
- Sbahi, S., Ouazzani, N., Latrach, L., Hejjaj, A., & Mandi, L. (2020). Predicting the concentration of total coliforms in treated rural domestic wastewater by multi-soil-layering (MSL) technology using artificial neural networks. *Ecotoxicology and Environmental Safety*, 204. <https://doi.org/10.1016/j.ecoenv.2020.111118>
- Sidebang, C. P., & Syafnil. (2017). Use of Sand as a Component of Multi Soil Layering (MSL) System to Minimize Liquid Waste Contaminant of Crude Palm Oil (CPO). *Jurnal Agro Industri*, 7(2), 115–124.
- Silalahi, I. H. (2017). ADSORPSI Hg (II) MENGGUNAKAN *Sargassum crassifolium* DENGAN ADANYA Pb (II), Cu (II) DAN Fe (II) Adsorption of Hg (II) by Using *Sargassum crassifolium* With Presence of Pb (II), Cu (II) And Fe (II). 5(1), 7–11.

- Song, P., Huang, G., An, C., Shen, J., Zhang, P., Chen, X., Shen, J., Yao, Y., Zheng, R., & Sun, C. (2018). Treatment of rural domestic wastewater using multi-soil-layering systems: Performance evaluation, factorial analysis and numerical modeling. *Science of the Total Environment*, 644, 536–546. <https://doi.org/10.1016/j.scitotenv.2018.06.331>
- Song, P., Huang, G., Hong, Y., An, C., Xin, X., & Zhang, P. (2020). A biophysiological perspective on enhanced nitrate removal from decentralized domestic sewage using gravitational-flow multi-soil-layering systems. *Chemosphere*, 240. <https://doi.org/10.1016/j.chemosphere.2019.124868>
- Swesty, N., Zein, R., & Zilfa, Z. (2019). Penjernihan Air Sumur Menuju Air Layak Minum Dengan Metoda Lapisan Multi Media (LMM). *Jurnal Riset Kimia*, 10(1), 9–19. <https://doi.org/10.25077/jrk.v12i2.297>
- Sy, S., Muchtar, H., Sofyan, & Kasman, M. (2017). The Effect of MSL Reactor Influent Flow Rate on Reduction of BOD, COD, TSS and Oils/Fats of Edible Oil Industry Wastewater. *Jurnal Litbang Industri*, 7(1), 41–51.
- Wibowo, D. N., Wicaksono, R., & Naufalin, R. (2019). Application of Multi Soil Layer Type of Batik Liquid Waste Treatment Units and Phytoremediation on Batik SME of Binangun, Banyumas. *Prosiding Seminar Nasional Dan Call for Papers*, 8, 19–20.

Of all the samples that have been tested, the highest success rate is obtained in the polluted water sample obtained at the Gunung Nago Irrigation area of Pasar Baru, Cupak Tengah Village, Pauh IX District, Padang with COD waste content, the success rate is 97.21-99,59% proving that anaerobes are capable of treating high concentrations of waste.

CONCLUSION

Comparing aerobes and anaerobes in handling domestic waste using the MSL process, it turns out that using anaerobes is superior to aerobics. Aerobic processes are less efficient for use in wastewater at high pollutant levels above 3000 mg/L. At the same time, using this can reduce organic waste with high levels of up to 80,000 mg/L. In using anaerobes, there are several advantages, namely saving energy and producing biogas. Besides being profitable, the anaerobic process also has a weakness. The reaction in reducing pollutants tends to be slower, sensitive to air, temperature fluctuations in the load, and less effective in treating waste with low levels below 3000mg/L.

ACKNOWLEDGMENT

All Acknowledgments must be conveyed (if any) to the contributing parties, aid providers (complete with contract numbers), and other parties who participated in the preparation of this article.

REFERENCES

- Adinda, T., & Elystia, S. (2015). *Metoda Multi Soil Layering Dalam Pengolahan Air Gambut*

Dengan Variasi Hydraulic Loading Rate Dan Material Organik Pada Lapisan Anaerob. 2(1), 1–7.

- Akhyar Okviyoandra, Antoni Pardede, and R. R. A. A. K. W. (2016). Penurunan Bod Dan Cod Pada Limbah Cair Sasirangan Menggunakan Metoda Multi Soil Layering (Msl). *Media Sains*, 9(2), 162–166.
- Aldilla Fajri, J., Fujisawa, T., Trianda, Y., Ishiguro, Y., Cui, G., Li, F., & Yamada, T. (2018). Effect of Aeration Rates on Removals of Organic Carbon and Nitrogen in Small Onsite Wastewater Treatment System (Johkasou). *MATEC Web of Conferences*, 147. <https://doi.org/10.1051/mateconf/201814704008>
- An, C. J., McBean, E., Huang, G. H., Yao, Y., Zhang, P., Chen, X. J., & Li, Y. P. (2016). Multi-soil-layering systems for wastewater treatment in small and remote communities. *Journal of Environmental Informatics*, 27(2), 131–144. <https://doi.org/10.3808/jei.201500328>
- Dan, E., Penyerapan, K., Ash, F. L. Y., Edwin, T., Elystia, S., Amelia, D., Indah, S., & Helard, D. (2001). *PENYISIHAN MINYAK DAN LEMAK DARI LIMBAH CAIR HOTEL DENGAN METODE MULTI SOIL LAYERING (MSL) satu sumber limbah cair domestik . Gubernur Sumatera Barat Nomor 26 Tahun 2001 tentang Baku Mutu Limbah Cair Bagi Kegiatan Hotel di yang telah mengujicobakan meto.*
- Dessy Novela, I. D. (2019). Penurunan COD, BOD DAN TSS Pada Limbah Cair Industri Tahu Melalui Sistem Multy Soil Layering (MSL) Menggunakan Arang Karbon Ampas Tebu. *Journal of Residu*, 3(21), 8–14.
- Fajri, J. A., Wulandari, D., Nurmiyanto, A., & Rahayu, A. (2021). Penurunan Kandungan Hidrokarbon Menggunakan Constructed Wetland Reactor Dalam Mengolah Limbah Minyak Removal of Hydrocarbon Compounds Using Constructed Wetland Reactor to Treat Oily Wastewater. *Open Science and Technology*, 01(02), 246–256.
- Hadrah, H., Kasman, M., & Septiani, K. T. (2019). Analisis Penurunan Parameter Pencemar Limbah Cair Laundry dengan Multi Soil Layering (MSL). *Jurnal Daur Lingkungan*, 2(1), 36. <https://doi.org/10.33087/daurling.v2i1.22>
- Hanum, Farrah Fadhillah; Rahayu, A. (2022). Studi Pemanfaatan dan Metode Pemisahan Silika dari Coal Fly Ash A Study for Silika Utilization and Its Separation Method from. *Open Science and Technology*, 02(01), 26–32.
- Haribowo, R., Megah, S., & Rosita, W. (2019). Efisiensi Sistem Multi Soil Layering Pada Pengolahan Air Limbah Domestik Pada Daerah Perkotaan Padat Penduduk. *Jurnal Teknik Pengairan*, 10(1), 11–27. <https://doi.org/10.21776/ub.pengairan.2019.010.01.2>
- Harimu, L., Haetami, A., Sari, C. P., Haeruddin, H., & Nurlansi, N. (2020). Perbandingan Kemampuan Aerasi Sembur (Spray) dengan Metode Adsorpsi Menggunakan Adsorben Serbuk Kulit Buah Kakao untuk Menurunkan Kadar Besi dan Mangan Pada Air Sumur Gali. *Indo. J. Chem. Res.*, 8(2), 137–143. <https://doi.org/10.30598/ijcr.2020.8-hrm>
- Hartaja, N. I. S. dan D. R. K. (2015). Pengolahan Air Lindi Dengan Proses Biofilter Anaerob-

Aerob Dan Denitrifikasi. *Pusat Teknologi Lingkungan, BPPT*, 8(1).


- Herman, W., Darmawan, D., & Gusnidar, G. (2017). Pemanfaatan Tanah Vulkanik Dalam Sistem Multiple Soil Layering (MSL) Terhadap Pemurnian Air Irigasi Terpolusi. *Jurnal Bibiet*, 2(2), 49–59. <https://doi.org/10.22216/jbvt.v2i1.3085>
- Hong, Y., Huang, G., An, C., Song, P., Xin, X., Chen, X., Zhang, P., Zhao, Y., & Zheng, R. (2019). Enhanced nitrogen removal in the treatment of rural domestic sewage using vertical-flow multi-soil-layering systems: Experimental and modeling insights. *Journal of Environmental Management*, 240(November 2018), 273–284. <https://doi.org/10.1016/j.jenvman.2019.03.097>
- Ihsan, T., Indah, S., & Denny, H. (2013). Penyisihan Kalium dari Limbah Cair Persawahan dengan Metode Multi Soil Layering (MSL). *Jurnal Teknik Lingkungan*, 10(2), 133–141.
- Kasman, M., Herawati, P., & Hadrah, H. (2021). Pengaruh Hydraulic Loading Rate (Hlr) Terhadap Pengolahan Leachate Dengan Menggunakan Metoda Multi Soil Layering (Msl). *Sustainable Environmental and Optimizing Industry Journal*, 1(2), 1–8. <https://doi.org/10.36441/seoi.v1i2.178>
- Komala, P. S., Helard, D., & Delimas, D. (2012). Identification of Anaerobic Dominant Microbes in Rubber Industrial Waste Water Treatment With Multi Soil Layering (MSL) System. *Jurnal Teknik Lingkungan UNAND*, 9(1), 74–88.
- Koottatep, T., Pussayanavin, T., Khamyai, S., & Polprasert, C. (2021). Performance of novel constructed wetlands for treating solar septic tank effluent. *Science of the Total Environment*, 754(6). <https://doi.org/10.1016/j.scitotenv.2020.142447>
- Lamzouri, K., Mahi, M., Ouatar, S., Bartali, E., Masunaga, T., Latrach, L., & Mandi, L. (2016). Application of Multi-Soil-Layering Technique for Wastewater Treatment in Moroccan Rural Areas: Study of Tehe Operation Process for an Engineering Design. *Journal of Materials and Environmental Science*, 7(2), 579–585.
- Latrach, L., Masunaga, T., Ouazzani, N., Hejjaj, A., Mahi, M., & Mandi, L. (2014). Removal of bacterial indicators and pathogens from domestic wastewater by the multi-soil-layering (MSL) system. *Soil Science and Plant Nutrition*, 61(2), 337–346. <https://doi.org/10.1080/00380768.2014.974480>
- Latrach, L., Ouazzani, N., Masunaga, T., Hejjaj, A., Bouhoum, K., Mahi, M., & Mandi, L. (2016). Domestic wastewater disinfection by combined treatment using multi-soil-layering system and sand filters (MSL-SF): A laboratory pilot study. *Ecological Engineering*, 91, 294–301. <https://doi.org/10.1016/j.ecoleng.2016.02.036>
- Latupeirissa, J., & Fransina, E. G. (2014). *THE CHARACTERIZATION OF CLAYS FROM LATUHALAT VILLAGE ACTIVATED USING AMMONIUM NITRATE Karakterisasi Lempung Asal Desa Latuhalat Yang Teraktivasi Amonium Nitrat*. 78–82.
- Maryudi, M., Rahayu, A., Syauqi, R., & Islami, M. K. (2021). Teknologi Pengolahan Kandungan Kromium dalam Limbah Penyamakan Kulit Menggunakan Proses Adsorpsi:

Review. *Jurnal Teknik Kimia Dan Lingkungan*, 5(1), 90.
<https://doi.org/10.33795/jtkl.v5i1.207>

- Megah, S., & Haribowo, R. (2016). *Efisiensi Pengolahan Limbah Domestik Menggunakan Metode Multi Soil Layering*.
- Mutia, R., Elystia, S., & Yenie, E. (2015). Metode Multi Soil Layering dalam Penyisihan Parameter TSS Limbah Cair Kelapa Sawit dengan Variasi Hydraulic Loading Rate (HLR) dan Material Organik pada Lapisan Anaerob. *Jurnal Online Mahasiswa Fakultas Teknik Universitas Riau*, 2(1), 1–6.
- Putra, A., & Fitri, W. E. (2018). Efektivitas Penurunan TSS, BOD, COD, Dan E.Coli Limbah Cair Industri Santan Kelapa Dengan Metode MSL (Multi Soil Layering) Yang Dimodifikasi. *Seminar Nasional Pelestarian Lingkungan (SENPLING) 2018*, 209–217.
- Putra, A., & Fitri, W. E. (2019). Efektivitas Multi Soil Layering Dalam Mereduksi Limbah Cair Industri Kelapa. *Dalton : Jurnal Pendidikan Kimia Dan Ilmu Kimia*, 2(2), 1–15.
<https://doi.org/10.31602/dl.v2i2.2394>
- Putri, V. D., & Dyna, F. (2019). Jurnal Katalisator. *Standarisasi Ganyong (Canna Edulis Kerr) Sebagai Pangan Alternatif Pasien Diabetes Mellitus*, 4(2), 111–118.
- Rahayu, A., Fadhillah Hanum, F., Aldilla Fajri, J., Dwi Anggraini, W., & Khasanah, U. (2021). Review: Pengolahan Limbah cair Industri dengan Menggunakan Silika A Review: Industrial Liquid Waste Treatment Using Silica. *Open Science and Technology*, 02(01), 2776–169. <https://opscitech.com/journal>
- Rahayu, A., Lim, L. W., & Takeuchi, T. (2015). Preparation of a hybrid monolithic stationary phase with allylsulfonate for the rapid and simultaneous separation of cations in capillary ion chromatography. *Journal of Separation Science*, 38(7), 1109–1116.
<https://doi.org/10.1002/jssc.201401264>
- Sbahi, S., Ouazzani, N., Latrach, L., Hejjaj, A., & Mandi, L. (2020). Predicting the concentration of total coliforms in treated rural domestic wastewater by multi-soil-layering (MSL) technology using artificial neural networks. *Ecotoxicology and Environmental Safety*, 204. <https://doi.org/10.1016/j.ecoenv.2020.111118>
- Sidebang, C. P., & Syafnil. (2017). Use of Sand as a Component of Multi Soil Layering (MSL) System to Minimize Liquid Waste Contaminant of Crude Palm Oil (CPO). *Jurnal Agro Industri*, 7(2), 115–124.
- Silalahi, I. H. (2017). *ADSORPSI Hg (II) MENGGUNAKAN Sargassum crassifolium DENGAN ADANYA Pb (II), Cu (II) DAN Fe (II) Adsorption of Hg (II) by Using Sargassum crassifolium With Presence of Pb (II), Cu (II) And Fe (II)*. 5(1), 7–11.
- Song, P., Huang, G., An, C., Shen, J., Zhang, P., Chen, X., Shen, J., Yao, Y., Zheng, R., & Sun, C. (2018). Treatment of rural domestic wastewater using multi-soil-layering systems: Performance evaluation, factorial analysis and numerical modeling. *Science of the Total Environment*, 644, 536–546. <https://doi.org/10.1016/j.scitotenv.2018.06.331>

- Song, P., Huang, G., Hong, Y., An, C., Xin, X., & Zhang, P. (2020). A biophysiological perspective on enhanced nitrate removal from decentralized domestic sewage using gravitational-flow multi-soil-layering systems. *Chemosphere*, 240. <https://doi.org/10.1016/j.chemosphere.2019.124868>
- Swesty, N., Zein, R., & Zilfa, Z. (2019). Penjernihan Air Sumur Menuju Air Layak Minum Dengan Metoda Lapisan Multi Media (LMM). *Jurnal Riset Kimia*, 10(1), 9–19. <https://doi.org/10.25077/jrk.v12i2.297>
- Sy, S., Muchtar, H., Sofyan, & Kasman, M. (2017). The Effect of MSL Reactor Influent Flow Rate on Reduction of BOD, COD, TSS and Oils/Fats of Edible Oil Industry Wastewater. *Jurnal Litbang Industri*, 7(1), 41–51.
- Wibowo, D. N., Wicaksono, R., & Naufalin, R. (2019). Application of Multi Soil Layer Type of Batik Liquid Waste Treatment Units and Phytoremediation on Batik SME of Binangun, Banyumas. *Prosiding Seminar Nasional Dan Call for Papers*, 8, 19–20.

Lampiran 3

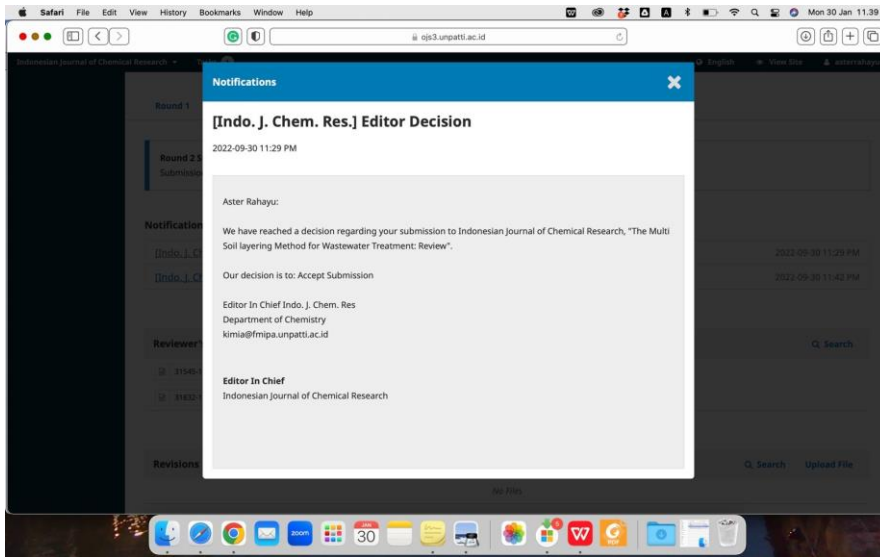

Lampiran 4



Indonesian Journal of Chemical Research
Journal Article Publishing
To: Muh, Nur Khoirul Wihadi, aster.rahayu@che.uad.ac.id

Penting 3 October 2022 08:18

Dear Authors,
We would like to inform you that your article has been published in our journal. Please check it at <https://ojs.ijcra.ac.id/index.php/ijcra/index>
If there is a problem or additional correction, please let us know.
If there is no more correction, please you can continue to article processing charge at [Article Processing Charge | Indonesian Journal of Chemical Research \(ijcra.ac.id\)](https://www.ijcra.ac.id)

Thank you,
Editor

Multi Soil Layering Method for Wastewater Treatment: A Review

Aster Rahayu^{1*}, Irwan Mulyadi¹, Joni Aldilla Fajri², Siti Jamilatun¹, Nuraini¹, Nurul Wulandari¹, Yuni Marlana¹, Devi Yogi Noviana Ningsih¹, Lee Wah Lim³

¹Department of Chemical Engineering Department, Faculty of Industrial Technology, Universitas Ahmad Dahlan, Jl. Ringroad Selatan, Tamanan, Banguntapan, Bantul, D. I. Yogyakarta, Indonesia

²Department of Environmental Engineering, Faculty of Civil and Planning Engineering Universitas Islam Indonesia, Jl. Kaliurang KM 14,5, Sleman, Yogyakarta, Indonesia

³Department of Biomolecular Science, Faculty of Engineering, Gifu University, Yanagido 1-1, Gifu, Japan

*Corresponding Author: *aster.rahayu@che.uad.ac.id*

Received: July 2022

Received in revised: August 2022

Accepted: September 2022

Available online: September 2022

Abstract

Liquid waste is the main source of contamination of water bodies, especially river water. This pollution causes decreased water quality in water bodies. One of the wastewater treatment treatments is the Multi Soil Layering (MSL) method. Some of the advantages of using the MSL method are that it is known to be cheap in terms of cost, easy to implement, does not require complicated maintenance so that it can be used continuously, and is also environmentally friendly. One of the constituent materials of the MSL reactor is andesol soil, gravel, and perlite. MSL has two wastewater treatment zones, the aerobic zone, and the anaerobic zone. The article review aims to compare the efficiency of reducing the levels of pollutant parameters from aerobic and anaerobic processes in MSLmethod in wastewater.

Keywords: Aerobic, anaerobic, multi soil layering, wastewater treatment, MSL.

INTRODUCTION

The Multi Soil Layering (MSL) method is a wastewater treatment method that utilizes the ability of the soil as the main medium to reduce pollutant parameters and how to maximize the function of the soil, which is formed into a structure made in a construction consisting of a mixture of soil (organic) and rock composition. shaped like the arrangement of bricks. The composition of the soil mixture is usually made of selected soil, carbon, and others as well as for rock layers composed of additional materials such as rice husks, sawdust, zeolite, perlite, gravel, and depending on the type of rock available (Latrach et al., 2016; Putra et al., 2019; Putra et al., 2018).

In principle, the MSL method has the main treatment zones, namely the aerobic and anaerobic zones. The aerobic zone usually consists of rock (zeolite, gravel, perlite) while the anaerobic zone usually consists of a mixed layer of soil and activated carbon (charcoal)

(Adindaet al., 2015; Akhyar et al., 2016; Latrach et al., 2014; Mutia et al., 2015).

Multi soil layering (MSL) is a method of treating wastewater that is effective and efficient, easy, and inexpensive without having to incur expensive costs (An et al., 2016; Latrach et al., 2014). Currently, the MSL method has been widely used as an alternative in wastewater treatment which has been proven to be effective in treating domestic wastewater and small industries (Hadrah et al., 2019; Sy et al., 2017; (Kasman et al., 2021).

One example of domestic wastewater that contain of several pollutant such as NO₃⁻, treated with the MSL method is wastewater from the rest of household activities. The rest of household activities pollute the community environment through substances contained in wastewater which is very dangerous if not handled properly, in addition to household wastewater there is also wastewater from small home industries such as the laundry industry, industrial home batik, coconut industry, screen printing industry.

Similarly, industrial wastewater such as leather and weaving industry, containing some harmful pollutants that necessary to be treated. especially with adsorption method. Leather industry that hold some amount of coppers must be removed before spreading the undesirable effect to the environment (Maryudi et al., 2021).

From previous studies, the MSL method has succeeded in reducing levels of biological pollutant parameters such as BOD, COD, TSS, DO, pH, odor, and turbidity as well as heavy metal pollutant parameters such as Fe, Mn, and phosphate (Male, et al., 2020; Putri et al., 2019). In numerous of studies, domestic wastewater can reduce BOD around 68.67-87.63%, COD around 71.42-87.73%, and TSS around 69.11-77.12%. The cooking oil industry, it can reduce BOD levels around 86-99%, COD around 71-96%, TSS around 77-88%, and pH around 6.95-7.24 (Sbahi et al., 2020).

The article review aims to compare the efficiency of reducing levels of pollutant parameters from aerobic and anaerobic processes in the MSL method in wastewater.

MULTI SOIL LAYERING

Multi Soil Layering (MSL) is a method used in the wastewater treatment process. The wastewater treatment process using this method is known to be inexpensive in terms of cost, easy to implement, does not require complicated maintenance so that it can be used continuously, and is also environmentally friendly. In addition, the materials used in the MSL reactor are widely available and easy to find in Indonesia because the materials used can be obtained in nature and the environment around coconut charcoal, zeolite, rice husks, sawdust, activated charcoal from various organic materials, and coatings. Anaerobic soil consists of andesol originating from the mountains, while perlite and gravel are the aerobic layers (Fajri et al., 2018)

In wastewater treatment using the MSL method, the soil is used as the main medium to reduce pollutant parameters and enhance soil function through its structure (Haribowo et al., 2019; Lamzouri et al., 2016; Mutia et al., 2015; Song et al., 2018).

MSL method formed to become a reactor consisting of a mixed layer of soil and rock layers arranged like bricks. The composite layer of soil consists of organic matter, carbon elements found in charcoal, and other additives such as iron filings. Commonly used mixed layers such as perlite, gravel, and zeolite also depend on the type of rock contained in the composition of the bricks. Zeolite or perlite which contains silica group could support better performance during the adsorption process (Hanum et al, 2022; Rahayu, 2022; Rahayu et al., 2021). The effective use period for the MSL system for waste treatment is 12.8 years (Ihsan et al., 2013). (Nadhirah et al., 2021).

Based on the principle of the MSL method, there are two zones used in processing, namely the aerobic zone contained in the rock layer (perlite, gravel, and zeolite also depending on the type of rock present) and between the zeolite layer and soil mixture blocks. The function of the aerobic zone is to decompose organic matter, bind phosphate, oxidize ferrous ions to ferric ions, and nitrify. The mixed soil layer is in the anaerobic area. Using MSL, the wastewater treatment process consists of decomposition, filtration, fixation, nitrification, denitrification, absorption, and adsorption (Adindael al., 2015; Herman et al., 2017).

Numerous pieces of researches related to wastewater treatment using the MSL which uses many compositions from the reactor-making material and lots of samples have been tested. Some parameters investigated from all research parameters that are often sought are COD, BOD, TSS, pH, turbidity, odor, color, Ammonia, nitrate, nitrite, potassium phosphate and metals such as Mn, Pb, Hg, and Fe. Table 1 shows the composition of MSL.

Table 1. Multi Soil Layering (MSL) composition

| No | Composition | Waste Type | Aerobic/anaerobic MSL conditions | Success | Ref |
|----|---|---|----------------------------------|--|-----------------------|
| 1 | Coconutshell activated charcoal,perlite,gravel, rice husk, and Andasol soil. (With variations of HLR 5,10,20,40 ml/min) | Coconut industrial waste water | Aerobes and Anaerobes | BOD (35.68-20.13 and 13.53-33.01) COD (20.13-84.62 and 69.23-88.62) Turbidity (84.76-97.99 and 88.35-98.66) E.coli (99.25-99.92 and 25-99.92) | (Putra et al., 2018) |
| 2 | Coconut shell activated charcoal, perlite, gravel, rice husk, and Andasol soil.(With variations of HLR 5, 10, 20, 40 ml/min) | Coconut milk liquid waste | Aerobes and Anaerobes | Phosphate (99.28-99.80 and 99.82-99.87) Nitrite (68.06-76.39 and 67.36-74.31) Sulfate (96.97-97.48 and 86.56-97.30) Chloride (75.44- 85.51 and 82.99-88.66) Manganese (Mn) (79.44 - 94.39and49.77-80.61) Iron(Fe) (92.11-97.50 and 94.41-98.82) | (Putra et al., 2019) |
| 3 | Crushedstone, perlite, Andasol soil, gravel, banana peel charcoaland coconut shell charcoal (Variation HLR 500,700,900 l/m ² /day) | District peat water Tapung Kampar Regency | Anaerobic | Mn metal (36.65-55.83) Turbidity (63.86-61.45) pH (6.51-6.82) | (Adinda et al., 2015) |
| 4 | MSL A reactor (Andasol soil, zeolite and quartz sand) MSL B reactor (Andasol soil, isthmus and pumice stone) | Sasirangan industrial liquid waste | | BOD (63.89%) COD (65.6%) | (Akhyar et al., 2016) |
| 5 | Gravel, pearlite, ground activated charcoal of Kalapa shell and activated charcoal of banana peel. Reactor 1 MSL : Anaerobic layer of coconut shell activated charcoal and soil Reactor 2 MSL : Anaerobic layer of activated charcoal banana peel and soil (Variation of HLR 500, 750, and 1000 L/m ² /day) | Palm oil effluent in anaerobic pond II (outlet) WWTP PT. Nusantara V Sei Pagar Plantation, Riau. | Anaerobic | TSS (coconut)= (79.77-88.76) Ammonia (coconut) = (39.85-56.52) TSS (banana) = (73.03-79.77) | (Mutia et al., 2015) |
| 6 | MSL1 reactor :Zeolite layer and gravel and gravel mixed with zeolite MSL2 reactor :(soil mixture layer (coconut shell activated charcoal and Andasol soil) + (Paddy straw activated | Waste in the WWTP in RT.04 RW.07 Tlogomas Village. | | pH (4.25-5.77) TSS (58.42-71.05) TDS (18.05-31.84) DO (75.06-81.88) Turbidity (72.91-76.69) Electrical | (Megah et al., 2016) |

| | | | | | |
|----|--|---|-----------|--|--------------------------|
| | charcoal and Andasol soil) + (sawdust and Andasol soil) (Coconut shell and Andasol soil layers are more efficient) | | | Conductivity (16.49-31.77) | |
| 7 | Crushed stone, gravel/zeolite, soil mixture, and plastic nets (with variations of hrl 500,750, and 1000 l/m ² /day) (more efficient eg with the addition of zeolite is better than without zeolite) | Laundry Liquid Waste | | COD (74-87) BOD (75-88) TSS (73-88) Total phosphate (20-78) pH (6.73) MBA (85-95) | (Hadrah et al., 2019) |
| 8 | Reactor 1 MSL : gravel and charcoal, mixed layer of andisol soil, and crushed stone. Reactor 2 MSL : Sawdust and gravel, mixed layer of andisol and crushed stone. | Domestic wastewater from cafeteria and kitchen at Kasetsart University, Bangkok | Anaerobic | Oils and Fats (27,778-89,474) | (Sy et al., 2017) |
| 9 | A mixture of andosol soil, zeolite rock, gravel, rice husk, coconut shell charcoal, and sawdust. (most effective with sawdust in lowering heavy metal indicators) | Dug well water and river or ditch water in Teluk Nilap Village, Kubu Babussalam, Rokan Hilir | | pH (50) COD (31.16) BOD (73.16) Metal Hg (70.75) Metal Pb (26.74) Metal Fe (46.94) | (Putri et al., 2019) |
| 10 | Reactor MSL 1: a layer of gravel mixed with activated charcoal with soil MSL 2 reactor: layer of gravel and sawdust with soil, | Rice Field Liquid Waste | Anaerobic | Potassium (19,443-100) | (Ihsan et al., 2013) |
| 11 | Andesole soil and charcoal | Hotel Liquid Waste | Anaerobic | COD (55-90) | (Elystia, et al., 2012) |
| 12 | Andisol soil, bagasse activated charcoal powder and fine bagasse powder | Tofu industrial liquid waste | Aerobic | TSS (86.86) BOD (78.87) COD (89.75) | (Dessy et al., 2019) |
| 13 | Ijuk, iron, sawdust, activated charcoal that has been sifted with a size of 50 mesh and volcanic soil (variation of HLR 250, 500, 1000 l/m ² /day) | Polluted water in Mount Nago Irrigation area of Pasar Baru, Cupak Tengah Village, Pauh IX District, Padang. | Anaerobic | pH (8) COD (97.21)-99.59) BOD (98.84-99.73) PO ₄ ⁻ (>0.03 ppm) NH ₄ ⁺ (<0.2 ppm) | (Herman et al., 2017) |
| 14 | Zeolite, gravel sand, porous | Synthetic | | COD (98.29) | (Hong et |

| | | | | | |
|----|---|---|-----------------------|---|-------------------------|
| | plate and outlet pipe, soil, charcoal and iron powder. | waste in rural China | | TP (100) NH ₄ ⁺ (76.60) | al., 2019) |
| 15 | Mixture of soil, crushed stone and zeolite | Leachate Liquid Waste | | COD (96.771%) Ammonia (99.966%) Fe (99.279%) Color (96.53%) pH 7.00 | (Lamzouri et al., 2016) |
| 16 | Gravel, zeolite, a mixture of soil and coconut shell charcoal | Ethanol Industrial Liquid Waste | | COD (80.85) BOD (94.68) TSS (83.99) | (Irmanto et al., 2013) |
| 17 | Crushed stone, river pebbles, mixed soil and gravel | Leachate Liquid Waste | | COD (53.457) Ammonia (98,325) Fe (88.5) pH 7.00 | (Kasman et al., 2021) |
| 18 | Sand, gravel, humus soil, coconut charcoal. (innovation with sand with HLR 0.3 ; 0.6 ; 0.9 and 1.2 L/m ² /hour) | Liquid waste (WWTP) the last pool of the CPO industry | | COD (89.06-97.47) BOD (88.61-98.37) pH (6.72-7.36) Oil and Fat Content (88.27 -95.48) | (Sidebang et al., 2017) |
| 19 | Volcanic soil, rice husk, coconut shell activated charcoal, zeolite, iron powder. (variation of water rate (HLR) 10, 20, 40, 80 mL/m ² /min) | The sample came from the well water of a resident in Jati, Padang. | Aerobes and Anaerobes | Turbidity (54.65 and 44.04) Mn (66.44 and 47.26) Nitrite (58.74 and 49.74) Nitrates (58.34 and 45.57) pH (77 and 73) Odor (no smell) | (Song et al., 2020) |
| 20 | Sawdust, andisol soil, coarse gravel and fine gravel, and fine charcoal from coconut shells. | Cooking Oil Industry Liquid Waste | | BOD (98) COD (96) TSS (88) | (Swesty et al., 2019) |
| 21 | Silica sand, coconut husk, activated carbon, ginger coral, water hyacinth, fine zeolite, soil, coarse zeolite, gravel, and dacron | Batik liquid waste in Binangun Village, Banyumas District, Banyumas Regency. | | pH (7.94) Chromium (29.41) Turbidity (low) Odor (low) | (Wibowo et al., 2019) |

Table 1 shows that it can be seen that the percentage value for almost all parameters is close to perfect. For example, the COD results of 99.59% in the Mount Nago irrigation water sample in the Pasar Baru area, Cupak Tengah Village, Pauh IX District, Padang.

The composition of the MSL reactor is palm fiber, iron, sawdust, activated charcoal that has been sifted with a size of 50 mesh, and volcanic soil with variations in HLR or flow rate of 250,500,1000 l/m²/day with anaerobic process conditions (Hadrah et al., 2019).

The BOD result was 98.8% in the Mount Nago irrigation water sample in the Pasar Baru area, Cupak Tengah Village, Pauh IX District, Padang. The composition of the MSL reactor is palm fiber, iron, sawdust, activated charcoal that has been sifted with a size of 50 mesh and volcanic soil and with variations in HLR or flow rate of 250,500,1000 l/m²/day with anaerobic process conditions (Hadrah et al., 2019).

The TSS results were 79.77% with banana peel activated carbon and 88.76% with coconut shell activated carbon in the sample of palm oil liquid waste in the anaerobic pond II (outlet) of wastewater treatment plant PT. Nusantara V Sei Pagar Plantation, Riau. With the composition of gravel, perlite, soil activated charcoal of Kalapa shell and activated charcoal of banana peel, in this research there are two innovations, namely by making two reactors with activated carbon of banana peel and activated carbon of coconut shell where the reactor with the composition of activated charcoal of coconut shell is more effective, with HLR 500, 750, and 1000 l/m²/day under anaerobic conditions (Megah et al., 2016). The yield of Fe metal is 99% and 99, 27% in samples of coconut milk liquid waste and Leachate liquid waste with reactor compositions Coconut shell activated charcoal, perlite, gravel, rice husks, and Andasol soil and a mixture of soil, crushed stone and zeolite with an anaerobic process (Komala et al., 2012; Mutia, et al., 2015).

Manganese yield was 94.39% in coconut milk liquid waste samples with reactor compositions of Coconut shell activated charcoal, perlite, gravel, rice husks, and Andasol soil and with variations in HLR or flow rates of 5, 10, 20, 40, ml/m²/minute with aerobic processes (Mutia et al., 2015). It can be seen that the MSL method can be used to treat industrial, household, and other wastewater. With many reactor composition innovations that are easy to find around us.


The parameters that have been tested, each shows the level of success. Some samples that have been tested show MSL conditions, some are aerobic, and some are anaerobic, some have two states at once. However, in MSL conditions, this dramatically affects the success rate. In addition to aerobic and anaerobic process conditions, variations in the Hydraulic Loading Rate (HLR) are also very influential on the success of the Multi Soil Layering method. There is still very little explanation of this condition in aerobic conditions because the aerobic process is less efficient for use in wastewater at high pollutant levels above 3000 mg/L.

AEROBIC

Aerobic is a biological waste treatment that uses oxygen as a processing process. In the anaerobic process, the wastewater treatment process is carried out biologically; in the process, micro-organisms or bacteria are used to decompose certain pollutant compounds in a biological reactor (Fajri et al., 2018; Harimu et al., 2020). Conditions are created to adjust the growth of micro-organisms or bacteria to be used. Based on the oxygen present in the heterotrophic bacteria environment, heterotrophic bacteria are therefore divided into two types, namely: Firstly, Absolute aerobic bacteria: i.e. bacteria that, if there is no oxygen in the environment, can not live. Secondly, Aerobic, facultative bacteria: bacteria that can grow even without oxygen, but if there is oxygen in their environment, they will show faster growth. Factors that can affect the wastewater treatment process using aerobic such as hydrocarbon, oxygen, the composition of microorganisms, pH, temperature, and nutrients (Dewi, 2022; Fajri et al., 2021).

Aerobic bacteria used in wastewater treatment processes contain organic pollutants and other chemical compounds such as sulfides and ammonia. In this process, these compounds will be decomposed first to produce neutral and more environmentally friendly compounds. The aerobic decomposition process can be seen as follows:



Organic Decomposition Reaction:



Nitrification Reaction:



Sulfur Oxidation Reaction:



Based on these chemical reactions, it can be seen that oxygen is very influential because oxygen is needed to decompose pollutants, and the amount of oxygen required is proportional to the amount of organic, sulfide and ammonia present in wastewater (Hartaja, 2015). There are advantages in the aerobic process: the reaction is faster than the anaerobic process, and organic pollutants can be degraded to deficient concentrations.

Not only has its advantages, the wastewater treatment process carried out aerobically also has several disadvantages (Kasman et al., 2021). It takes much energy to supply oxygen to a wastewater treatment reactor, and the operating costs are high. During the process, the mud will appear so that it requires further handling and requires a relatively expensive cost. On the other hand, its process is less

efficient when used in wastewater with high levels of pollutants or waste above 3000 mg/L.

Treating wastewater using an aerobic method, it can reduce the level of danger from the water with the success rate of each and the type of each waste with variations in the HLR in each process. The following is a table of the success rate of the aerobic process:

Table 2. The success rate of aerobic methods in wastewater treatment


| No | Waste Type | Waste Content | Level of success (%) | Ref |
|----|--|----------------|----------------------|-----------------------|
| 1 | Coconut milk industry liquid waste | BOD | 35.68 - 20.13 | (Putra et al. 2018) |
| | | COD | 20.13 - 84.62 | |
| | | Turbidity | 84.76 - 97.99 | |
| | | E. coli | 99.25 - 99.92 | |
| 2 | Coconut industry liquid waste | Phosphate | 99.28 - 99.80 | (Putra et al., 2019) |
| | | Nitrite | 68.06 - 76.39 | |
| | | Sulfate | 96.97 - 97.48 | |
| | | Chloride | 75.44 - 85.51 | |
| | | Manganese (Mn) | 79.44 - 94.39 | |
| | | Iron (Fe) | 92.11 - 97.50 | |
| 3 | Tofu industrial liquid waste | TSS | 86.86 | (Dessy et al., 2019) |
| | | BOD | 78.87 | |
| | | COD | 89.75 | |
| 4 | The sample came from the well water of a resident in Jati, Padang. | Turbidity | 54.63 | (Wibowo et al., 2019) |
| | | Mn | 66.44 | |
| | | Nitrite | 58.74 | |
| | | Nitrate | 58.34 | |
| | | pH | 77 | |
| | | Smell | No smell | |

Table 2 shows that the highest BOD value is 78.7 in the aerobic process, which tests samples of tofu industrial waste. Factors that influence this process are HLR or water rate and reactor composition. At the highest COD value of 89.75, this parameter is also shown in the tofu industrial waste test. Factors influencing this process are variations in Hydraulic Loading Rate (HLR) or water rate and reactor composition.

ANAEROBIC

Anaerobic is a process that does not involve free oxygen as an oxidant. Anaerobic processing is carried out using microorganisms. In wastewater treatment, the use of microorganisms has a relatively high content of organic matter, so it is very potential if developed. Microorganisms can directly use wastewater as nutrients for growth. Anaerobic microorganisms are sensitive to oxygen because they can inhibit growth (Hartaja, 2015; Koottatep et al., 2021). Methane gas is obtained from an anaerobic process undergoing various stages.

The anaerobic process produces single carbon compounds because almost all organic polymers can be decomposed into single carbon compounds. The construction of methane gas comes from acetic acid, H_2 , and CO_2 . In addition, it can result from the conversion of formic acid and methanol (Hartaja, 2015).



Formic Acid



Methanol

The anaerobic process has several advantages including:

- Energy saving, because the decomposition process of organic pollutants by microbes is carried out without using air, so energy is not needed to supply air as occurs in aerobic

processes (Hartaja, 2015).

- Produce biogas (methane gas). The final breakdown of pollutant products, methane gas, which can be used as gas fuel, can be used for power generators and also in steam generator boilers (Hartaja, 2015).
- It can treat waste with high concentrations such as BOD up to 80,000 mg/l (Hartaja, 2015).

In addition to advantages, the anaerobic wastewater treatment process has several disadvantages including

- Slow pollutant decomposition reaction (Komala et al., 2012).
- Sensitive if exposed to air, temperature, and load fluctuations (Komala et al., 2012).

- If treating low concentration waste is less effective, such as BOD below 3,000 mg/l (Komala et al., 2012).
- The development of biomass to be used it takes a long time in start-up (Komala et al., 2012).

In the anaerobic process, it is known that the pollutant reaction rate is fundamentally influenced by the number of bacteria. In addition, the degradation process will take place quickly if given the addition of nutrients such as nitrogen and phosphate compounds. The anaerobic process will be disrupted if there are chemicals such as cyanide compounds, sulfur, and heavy metals. The following is a table of the success rate of the anaerobic process.

Table 3. The success rate of anaerobic methods in wastewater treatment

| No | Waste Type | Waste Content | Level of success | Ref. |
|----|---|--|--|------------------------|
| 1 | Peat Water Treatment | pH Mn . metal Turbidity | 6.51-6.82 36,6555,83 63.86-61.45 | (Adinda et al., 2015) |
| 2 | Coconut industry liquid waste | Phosphate Nitrite Sulfate Chloride Manganese (Mn) Iron (Fe) | 99.82-99.87 67.36-74.31 86.56-97.30 82.99-88.66 49.77-80.61 94.41-98.82 | (Putra et al., 2019) |
| 3 | Coconut milk industry liquid waste | BOD COD Turbidity E. coli | 13.53-33.01 69.23-88.62 88.35-98.66 25-99.92 | (Mutia et al., 2015) |
| 4 | Palm Oil Liquid Waste | TSS (coconut) TSS (banana) Ammonia (coconut) | 79.77 – 88.76 73.03-79.77 39.85 – 56.52 | (Mutia et al., 2015) |
| 5 | Domestic wastewater from cafeteria and kitchen at Kasetsart University, Bangkok | Oils and Fats | 27,778-89,474 | (Sy et al., 2017) |
| 6 | Rice Field Liquid Waste | Potassium | 19,433 -100 | (Ihsan et al., 2013) |
| 7 | Hotel Liquid Waste | COD | 55-90 | (Elystia et al., 2012) |
| 8 | Polluted water in Mount Nago Irrigation area of Pasar Baru, Cupak Tengah Village, Pauh IX District, Padang. | pH COD BOD PO ₄ ⁻ NH ₄ ⁺ | 8 97.21)-99.59 98.84-99.73 (>0.03 ppm <0.2ppm | (Herman et al., 2017) |
| 9 | The sample came from the well water of a resident in Jati, Padang. | Turbidity Mn Nitrite Nitrate pH Smell | 44.04 47.26 49.74 45.57 73 No smell | (Song et al., 2020) |

Based on Table 3, the anaerobic MSL conditions have been tested with several different samples and waste content which includes potassium, TSS (coconut), TSS (banana), ammonia, BOD, COD, turbidity, E. coli, phosphate, nitrite, sulfate, chloride, manganese (Mn), iron (Fe), turbidity, Mn, nitrate, pH, odor, odorless, oil and fat, PO_4^- , NH_4^+ and metal Mn (Latupeirissa, et al., 2014; Nurhadini and Silalahi, 2017; Raksajati et al., 2020; Rustiah et al., 2018).

CONCLUSION

Comparing aerobes and anaerobes in handling domestic waste using the MSL process, it turns out that using anaerobes is superior to aerobics. Aerobic processes are less efficient for use in wastewater at high pollutant levels above 3000 mg/L. At the same time, using this can reduce organic waste with high levels of up to 80,000 mg/L. In using anaerobes, there are several advantages, namely saving energy and producing biogas. Besides being profitable, the anaerobic process also has a weakness. The reaction in reducing pollutants tends to be slower, sensitive to air, temperature fluctuations in the load, and less effective in treating waste with low levels below 3000mg/L.

REFERENCES

- Adinda, T., & Elystia, S. (2015). Metoda Multi Soil Layering Dalam Pengolahan Air Gambut Dengan Variasi Hydraulic Loading Rate Dan Material Organik Pada Lapisan Anaerob. *Jurnal Online Mahasiswa (JOM) Bidang Teknik dan Sains*, 2(1), 1-7.
- Akhyyar Okviyoandra, Antoni Pardede, and R. R. A. A. K. W. (2016). Penurunan BOD Dan COD Pada Limbah Cair Sasirangan Menggunakan Metoda Multi Soil Layering (Msl). *Media Sains*, 9(2), 162–166.
- Aldilla Fajri, J., Fujisawa, T., Trianda, Y., Ishiguro, Y., Cui, G., Li, F., & Yamada, T. (2018). Effect of Aeration Rates on Removals of Organic Carbon and Nitrogen in Small Onsite Wastewater Treatment System (Johkasou). *MATEC Web of Conferences*, 147. <https://doi.org/10.1051/mateconf/201814704008>
- An, C. J., McBean, E., Huang, G. H., Yao, Y., Zhang, P., Chen, X. J., & Li, Y. P. (2016). Multi-soil-layering systems for Wastewater Treatment In Small and Remote Communities. *Journal of Environmental Informatics*, 27(2), 131–144. <https://doi.org/10.3808/jei.201500328>
- Elystia, S., Amelia, D., Indah, S., & Helard, D. (2012). Efficiency Of Multi Soil Layering (Msl) Method for Removing Cod From Hotel Wastewater. *Jurnal Teknik Lingkungan*. 9 (2).
- Dessy Novela, I. D. (2019). Penurunan COD, BOD DAN TSS Pada Limbah Cair Industri Tahu Melalui Sistem Multy Soil Layering (MSL) Menggunakan Arang Karbon Ampas Tebu. *Journal of Residu*, 3(21), 8–14.
- Dewi, V.M.I., Ragmayanti, M., (2022). The Interaction Mechanism of Papaya Seeds (*Carica papaya* L.) as a Natural Coagulant and Remazol Red Under Different pH Conditions. *Indo. J. Chem. Res.*, 10(1), 14-18.
- Fajri, J. A., Wulandari, D., Nurmiyanto, A., & Rahayu, A. (2021). Penurunan Kandungan Hidrokarbon Menggunakan Constructed Wetland Reactor Dalam Mengolah Limbah Minyak Removal of Hydrocarbon Compounds Using Constructed Wetland Reactor to Treat Oily Wastewater. *Open Science and Technology*, 01(02), 246–256.
- Hadrah, H., Kasman, M., & Septiani, K. T. (2019). Analisis Penurunan Parameter Pencemar Limbah Cair Laundry dengan Multi Soil Layering (MSL). *Jurnal Daur Lingkungan*, 2(1), 36. <https://doi.org/10.33087/daurling.v2i1.22>
- Hanum, Farrah Fadhilah; Rahayu, A. (2022). Studi Pemanfaatan dan Metode Pemisahan Silika dari Coal Fly Ash A Study for Silika Utilization and Its Separation Method from. *Open Science and Technology*, 02(01), 26-32.
- Haribowo, R., Megah, S., & Rosita, W. (2019). Efisiensi Sistem Multi Soil Layering Pada Pengolahan Air Limbah Domestik Pada Daerah Perkotaan Padat Penduduk. *Jurnal Teknik Pengairan*, 10(1), 11-27. <https://doi.org/10.21776/ub.pengairan.2019.010.01.2>
- Harimu, L., Haetami, A., Sari, C. P., Haeruddin, H., & Nurlansi, N. (2020). Perbandingan Kemampuan Aerasi Sembur (Spray) dengan Metode Adsorpsi Menggunakan Adsorben Serbuk Kulit Buah Kakao untuk Menurunkan Kadar Besi dan Mangan Pada Air Sumur Gali. *Indo. J. Chem. Res.*, 8(2), 137-143. <https://doi.org/10.30598/ijcr.2020.8-hrm>
- Hartaja, N. I. S. dan D. R. K. (2015). Pengolahan Air Lindi Dengan Proses Biofilter Anaerob-Aerob Dan Denitrifikasi. *Pusat Teknologi Lingkungan, BPPT*, 8(1), 1-20.
- Herman, W., Darmawan, D., & Gusnidar, G. (2017). Pemanfaatan Tanah Vulkanik Dalam Sistem Multiple Soil Layering (MSL) Terhadap

- Pemurnian Air Irigasi Terpolusi. *Jurnal Bibiet*, 2(2), 49-59. <https://doi.org/10.22216/jbvt.v2i1.3085>
- Hong, Y., Huang, G., An, C., Song, P., Xin, X., Chen, X., Zhang, P., Zhao, Y., & Zheng, R. (2019). Enhanced nitrogen removal in the treatment of rural domestic sewage using vertical-flow multi-soil-layering systems: Experimental and modeling insights. *Journal of Environmental Management*, 240(November 2018), 273-284. <https://doi.org/10.1016/j.jenvman.2019.03.097>
- Ihsan, T., Indah, S., & Denny, H. (2013). Penyisihan Kalium dari Limbah Cair Persawahan dengan Metode Multi Soil Layering (MSL). *Jurnal Teknik Lingkungan*, 10(2), 133-141.
- Kasman, M., Herawati, P., & Hadrah, H. (2021). Pengaruh Hydraulic Loading Rate (Hlr) Terhadap Pengolahan Leachate Dengan Menggunakan Metoda Multi Soil Layering (Msl). *Sustainable Environmental and Optimizing Industry Journal*, 1(2), 1-8. <https://doi.org/10.36441/seoi.v1i2.178>
- Komala, P. S., Helard, D., & Delimas, D. (2012). Identification of Anaerobic Dominant Microbes in Rubber Industrial Waste Water Treatment With Multi Soil Layering (MSL) System. *Jurnal Teknik Lingkungan UNAND*, 9(1), 74-88.
- Koottatep, T., Pussayanavin, T., Khamyai, S., & Polprasert, C. (2021). Performance of novel constructed wetlands for treating solar septic tank effluent. *Science of the Total Environment*, 754(6). <https://doi.org/10.1016/j.scitotenv.2020.142447>
- Lamzouri, K., Mahi, M., Ouatar, S., Bartali, E., Masunaga, T., Latrach, L., & Mandi, L. (2016). Application of Multi-Soil-Layering Technique for Wastewater Treatment in Moroccan Rural Areas: Study of Tehe Operation Process for an Engineering Design. *Journal of Materials and Environmental Science*, 7(2), 579-585.
- Latrach, L., Masunaga, T., Ouazzani, N., Hejjaj, A., Mahi, M., & Mandi, L. (2014). Removal of Bacterial Indicators And Pathogens From Domestic Wastewater by The Multi-Soil-Layering (MSL) System. *Soil Science and Plant Nutrition*, 61(2), 337-346. <https://doi.org/10.1080/00380768.2014.974480>
- Latrach, L., Ouazzani, N., Masunaga, T., Hejjaj, A., Bouhoum, K., Mahi, M., & Mandi, L. (2016). Domestic Wastewater Disinfection by Combined Treatment Using Multi-Soil-Layering System and Sand Filters (MSL-SF): A laboratory pilot study. *Ecological Engineering*, 91, 294-301. <https://doi.org/10.1016/j.ecoleng.2016.02.036>
- Latupeirissa, J., & Fransina, E. G. (2014). The Characterization Of Clays From Latuhalat Village Activated Using Ammonium Nitrate Karakterisasi Lempung Asal Desa Latuhalat Yang Teraktivasi Amonium Nitrat, 1(2), 78-82.
- Male, Y.T., Seumahu, C.A., Malle, D. (2020). Bioremediation of Pb and Cd Metal from Inner Ambon Bay Sediment Which Contaminated With Heavy Metal Using *Aspergillus niger*. *Indo. J. Chem. Res.*, 7(2), 183-188.
- Maryudi, M., Rahayu, A., Syauqi, R., & Islami, M. K. (2021). Teknologi Pengolahan Kandungan Kromium dalam Limbah Penyamakan Kulit Menggunakan Proses Adsorpsi: Review. *Jurnal Teknik Kimia Dan Lingkungan*, 5(1), 90. <https://doi.org/10.33795/jtkl.v5i1.207>
- Mutia, R., Elystia, S., & Yenie, E. (2015). Metode Multi Soil Layering dalam Penyisihan Parameter TSS Limbah Cair Kelapa Sawit dengan Variasi Hydraulic Loading Rate (HLR) dan Material Organik pada Lapisan Anaerob. *Jurnal Online Mahasiswa Fakultas Teknik Universitas Riau*, 2(1), 1-6.
- Putra, A., & Fitri, W. E. (2018). Efektivitas Penurunan TSS, BOD, COD, Dan E.Coli Limbah Cair Industri Santan Kelapa Dengan Metode MSL (Multi Soil Layering) Yang Dimodifikasi. *Seminar Nasional Pelestarian Lingkungan (SENPLING) 2018*, 209-217.
- Putra, A., & Fitri, W. E. (2019). Efektivitas Multi Soil Layering Dalam Mereduksi Limbah Cair Industri Kelapa. *Dalton : Jurnal Pendidikan Kimia Dan Ilmu Kimia*, 2(2), 1-15. <https://doi.org/10.31602/dl.v2i2.2394>
- Putri, V. D., & Dyna, F. (2019). Jurnal Katalisator. *Standarisasi Ganyong (Canna Edulis Kerr) Sebagai Pangan Alternatif Pasien Diabetes Mellitus*, 4(2), 111-118.
- Rahayu, A., Fadhillah Hanum, F., Aldilla Fajri, J., Dwi Anggraini, W., & Khasanah, U. (2021). Review: Pengolahan Limbah cair Industri dengan Menggunakan Silika A Review: Industrial Liquid Waste Treatment Using Silica. *Open Science and Technology*, 02(01), 2776-169. <https://opscitech.com/journal>
- Rahayu, A., Lim, L. W., & Takeuchi, T. (2015). Preparation of a hybrid monolithic stationary phase with allylsulfonate for the rapid and simultaneous separation of cations in capillary ion chromatography. *Journal of Separation Science*, 38(7), 1109-1116. <https://doi.org/10.1002/jssc.201401264>

- Raksajati, A., Adhi, T., P., Ariono, D. (2020). Pengaruh Tekanan Dan Tahap Kompresi Dalam Pemurnian Biogas Menjadi Biometana Dengan Absorpsi CO₂ Menggunakan Air Bertekanan. *Indo. J.Chem. Res.*, 8(1), 1-5.
- Rustiah, W., Andriani, Y. (2018). Analisis Serbuk Biji Kelor (*Moringa Oleifera*, Lamk) dalam Menurunkan Kadar COD dan BOD pada Air Limbah Jasa Laundry. *Indo. J.Chem. Res.*, 5(2), 96-100.
- Sbahi, S., Ouazzani, N., Latrach, L., Hejjaj, A., & Mandi, L. (2020). Predicting The Concentration of Total Coliforms in Treated Rural Domestic Wastewater by Multi-Soil-Layering (MSL) Technology Using Artificial Neural Networks. *Ecotoxicology and Environmental Safety*, 204. <https://doi.org/10.1016/j.ecoenv.2020.111118>
- Sidebang, C. P., & Syafnil. (2017). Use of Sand as a Component of Multi Soil Layering (MSL) System to Minimize Liquid Waste Contaminant of Crude Palm Oil (CPO). *Jurnal Agro Industri*, 7(2), 115-124.
- Nurhadini, N., and Silalahi, I. (2017). Adsorpsi Hg(II) Menggunakan *Sargassum crassifolium* dengan Adanya Pb(II), Cu(II) dan Fe(II). *Indo. J.Chem. Res.*, 5(1), 7-11.
- Song, P., Huang, G., An, C., Shen, J., Zhang, P., Chen, X., Shen, J., Yao, Y., Zheng, R., & Sun, C. (2018). Treatment of Rural Domestic Wastewater Using Multi-Soil-Layering Systems: Performance Evaluation, Factorial Analysis and Numerical Modeling. *Science of the Total Environment*, 644, 536-546. <https://doi.org/10.1016/j.scitotenv.2018.06.331>
- Song, P., Huang, G., Hong, Y., An, C., Xin, X., & Zhang, P. (2020). A Biophysiological Perspective on Enhanced Nitrate Removal from Decentralized Domestic Sewage Using Gravitational-Flow Multi-Soil-Layering Systems. *Chemosphere*, 240. <https://doi.org/10.1016/j.chemosphere.2019.124868>
- Swesty, N., Zein, R., & Zilfa, Z. (2019). Penjernihan Air Sumur Menuju Air Layak Minum Dengan Metoda Lapisan Multi Media (LMM). *Jurnal Riset Kimia*, 10(1), 9-19. <https://doi.org/10.25077/jrk.v12i2.297>
- Sy, S., Muchtar, H., Sofyan, & Kasman, M. (2017). The Effect of MSL Reactor Influent Flow Rate on Reduction of BOD, COD, TSS and Oils/Fats of Edible Oil Industry Wastewater. *Jurnal Litbang Industri*, 7(1), 41-51.
- Wibowo, D. N., Wicaksono, R., & Naufalin, R. (2019). Application of Multi Soil Layer Type of Batik Liquid Waste Treatment Units and Phytoremediation on Batik SME of Binangun, Banyumas. *Prosiding Seminar Nasional Dan Call for Papers*, 8, 19-20.