







Synthesis Silica-PEG By Physically Coating with PEG 4000 for Absorption of Ion Nitrate			
Tanggal	Author	Editor	Bukti
08/08/2022	Submission	Received	Lampiran 1
11/08/2022		Review 1	Lampiran 2
24/08/2022		Review 2	Lampiran 3
16/12/2022		Review 3	Lampiran 4
16/01/2022		Accepted	Lampiran 5
02/03/2023		Publish	Lampiran 6

Lampiran 1

[EKW] Submission Acknowledgement (do not reply to this email) Inbox x  

 **Muhammad Ridwan Harahap** <jurnal@ar-raniry.ac.id>
to me ▾ Mon, Aug 8, 2022, 9:47 PM   

Dear Aster Rahayu:

Thank you for submitting the manuscript, "SYNTHESIS SILICA-PEG BY PHYSICALLY COATING WITH PEG 4000 FOR ABSORPTION OF ION NITRATE" to Eikawnie: Journal of Islamic Science and Technology. With the online journal management system that we are using, you will be able to track its progress through the editorial process by logging in to the journal web site:

Manuscript URL:
<https://jurnal.ar-raniry.ac.id/index.php/eikawnie/author/submission/14680>
Username: asterrahayu

If you have any questions, please contact me. Thank you for considering this journal as a venue for your work.

Muhammad Ridwan Harahap
Eikawnie: Journal of Islamic Science and Technology

This is an automated message. Please do not reply to this email.

Eikawnie: Journal of Islamic Science and Technology
<http://jurnal.ar-raniry.ac.id/index.php/eikawnie>

SYNTHESIS SILICA-PEG BY PHYSICALLY COATING WITH PEG 4000 FOR ABSORPTION OF ION NITRATE

Aster Rahayu*, Maryudi**, Joni Aldilla Fajri***, Muhammad Fariq Fajar****, Toby Kurniawan*****

*Department of Chemical Engineering, Universitas Ahmad Dahlan, Yogyakarta, Indonesia,

aster.rahayu@che.uad.ac.id

**Department of Chemical Engineering, Universitas Ahmad Dahlan, Yogyakarta, Indonesia,

maryudi@che.uad.ac.id

***Department of Environmental Engineering, Universitas Islam Indonesia, Yogyakarta, Indonesia,

joni.af@uii.ac.id

****Department of Chemical Engineering, Universitas Ahmad Dahlan, Yogyakarta, Indonesia,

muhhammad1800020013@webmail.uad.ac.id

*****Department of Chemical Engineering, Universitas Ahmad Dahlan, Yogyakarta, Indonesia,

tobby1800020033@webmail.uad.ac.id

Email Correspondence: aster.rahayu@che.uad.ac.id

Received :

Accepted :

Published :

Abstract: All production activities will eventually produce waste, especially liquid waste. This liquid waste usually empties into rivers and ends up in the sea. One of the substances in liquid waste is nitrate ion (NO_3^-) which in abundance can interfere with water systems and health. Several methods can be used to treat the nitrate contained in the water, such as adsorption. In this research, the adsorbent will be prepared from modified silica gel with PEG 4000 by physical coating. Several parameters will be observed, including the effect of coating time, silica-PEG ratio, PEG concentration, and coating temperature. The performance of silica-PEG to absorb NO_3^- is investigated. Characterization of functional group content in silica-PEG was carried out by Fourier Transform InfraRed (FTIR). The study results show that coating time was 10 minutes with the ratio of silica and PEG 1:5, and the concentration of PEG used was 15%, indicating the optimum performance of silica-PEG when used as a NO_3^- adsorbent. The ability of silica-PEG as a porous material is evidenced by an increase in the absorption capacity of silica-PEG compared to silica gel without the PEG coating process.

Keywords: Adsorption; Nitrates, PEGs; Silica coating

1. Introduction

Indonesia is one of the industrial countries, contributing to more than 20% of the Indonesian economy. It makes Indonesia the top 10 in the world in the category of manufacturing value-added. Along with the rapid development of industry in Indonesia, it cannot be separated from the problem of environmental pollution, one of which is water pollution. With increasing industrial growth in Indonesia, it has the potential to negatively impact ecological quality, especially waters, due to the imperfect processing of liquid waste produced by an industry. There is reinforced based on data collected from the Indonesian statistical agency in the environmental field; the level of water pollution in Indonesia has increased by 10% in recent years.

Physical, chemical, and biological parameters become the reference for determining water quality. The physical parameters include the value of turbidity, temperature, color, discharge, Total Dissolved Solid (TDS), and Total Suspended Solid (TSS). The chemical parameters include BOD, COD, DO, pH, nitrate content, nitrite, phosphate, and heavy metals. As for biology, the range of microorganisms is contained. One of the parameters of concern in testing water quality is the nitrite content. Increasing nitrate content in water can result in increased nutrient content in water. These nutrients are beneficial for the survival of aquatic biotas such as algae and bacteria. At a specific value limit, the presence of these nutrients will not have an effect, but at a high enough concentration, it will cause changes in function due to the eutrophication process.

One of the efforts to deal with water pollution due to industrial waste in Indonesia can be made with the adsorption method. The use of silica as a nitrate ion adsorbent in wastewater has been widely carried out. The use of silica is based on its properties which have a distinctive surface area and large pores. Several studies have been carried out to obtain silica as an adsorbent, heavy metal with reasonable effectiveness, such as silica

to absorb heavy metal waste iron (Fe), resulting in a decrease in Fe content of more than 0.1 ppm. Silica has also been successfully used as an adsorbent to reduce Mn^{2+} , Cd, Cr^{3+} , and Cu^{2+} in wastewater and nitrate levels in drinking water. (Fonny JL Risamasu & Hanif Budi Prayitno, 2011). Silica, a silicon oxide with a chemical formula (SiO_2), is an oxide that does not have an active group. Due to optimizing the potential of silica, the coating is done with polyethylene glycol (PEG). As a polymer, PEG has a primary hydroxyl group at the end of the polyether chain which is containing oxyethylene. It can form a double helix with intermolecular interactions. The functional groups in PEG can provide several other interactions, such as hydrogen bonding and dipole-dipole interactions,

This study aims to increase the effectiveness of silica by using a coating method with PEG. The absorption ability of silica PEG coating will be used as an adsorbent for the absorption of nitrate ions (NO_3^-). The ability of silica-PEG will be proven by comparing it with silica gel without going through a coating process on the absorption of nitrate ions.

2. Material And Methods

2.1 Materials

The materials used in this study included silica gel, PEG 4000 (Nacalai Tesque, Kyoto, Japan), $NaNO_3$ (Nacalai Tesque, Kyoto, Japan), Brucine Sulfate (Nacalai Tesque, Kyoto, Japan), Ethanol (Wako 1st Grade), Sulfuric Acid (Wako 1st Grade), NaCl (Nacalai Tesque, Kyoto, Japan) and Aquadest.

2.2 Apparatus

The detection of NO_3^- in terms of concentration, Spectrophotometry UV-Vis (Thermo Scientific-Genesys) was carried out. Furthermore, identifying the functional group in the polymer was carried out using Fourier Transform InfraRed (FTIR) Spectrum 400 Series Perkin Elmer.

2.3 Synthesis of Silica-PEG

Silica gel was modified with PEG and was carried out by weighing 3 grams of PEG 4000, dissolved in 20 ml of 98% ethanol, and then mixed with 5 grams of silica. The coating was carried out with a stirrer for a predetermined time. Then, separated silica with PEG. The performance of Silica-PEG was investigated to absorb NO_3^- using UV-Vis spectrophotometry.

3. Discussion

3.1 Modification of Silica with PEG 4000

Modification of silica gel using PEG 4000 through method physical coating. It was conducted by studying several factors affecting the silica modification process and results. Silica gel with a predetermined weight will be in physical contact with PEG 4000, and its effectiveness will be observed. And passivity absorption. In this case, the modified absorption power test silica will be done by contacting it with NO_3^- . The parameters observed were the contact time factor between PEG 4000 and silica, the ratio between silica and PEG 4000, the concentration of PEG 4000 used, and a temperature ongoing physical coating. Silica-PEG is contacted with 15 ppm NO_3^- ions in the subsequent measurement. The measurement of NO_3^- was carried out using UV-Vis Spectroscopy.

Silica-PEG formed with the coating process. The coating process lasts only on surface silica. Physically coating occurs based on the Van Der Waals Force Force interface between the silica and PEG surfaces. Silica has site active group silanol (Si-OH) and siloxane (Si-O-Si), a cluster -OH on the surface active site of silica gel with low polarizability. The presence of polarizability dramatically

affects the movement or displacement of electrons on the silica surface. In theory, a vast surface of nano silica interacts with the polymer chains, thereby reducing the freedom of movement of the PEG 4000 polymer chains. Visually there is a color change in the silica gel used, shown in Figure 1.

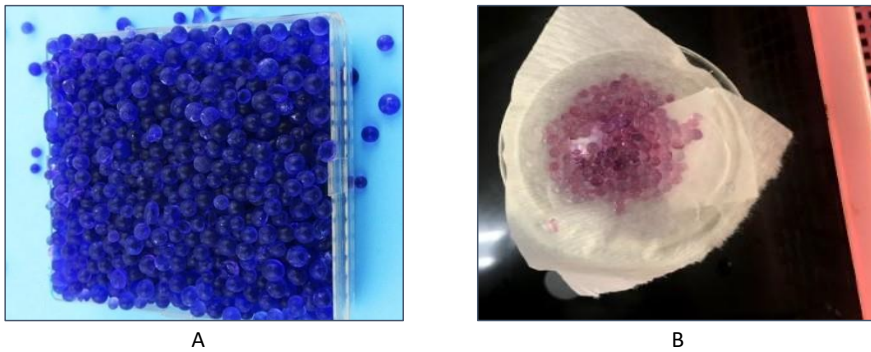


Figure 1. Visual silica gel. A. Silica gel before the coating process with PEG. B. Silica gel after processing coating with PEG

3.2 Effect of coating time on the effectiveness of silica-PEG

The effect of coating time on the effectiveness of silica-PEG was carried out on the absorption of anions. The anion used is NO_3^- ion with a concentration of 15 ppm. Absorption was carried out for 10 minutes at room temperature. The absorption results can be seen in Figure 2. It can be seen that the longer the coating time there is a decrease the effect of the silica-PEG, which is indicated by a reduction in the absorption capacity value (%). These can be caused by a fall layer of PEG that coats the silica surface due to prolonged contact between silica and PEG. The interaction between silica and PEG for 10 minutes in this coating time parameter shows a better capacity value than the other coating times. Due to weak silanol and siloxane bonds on silica gel, the highest adsorption occurred at 10 minutes with an adsorption value of 15%, so the used time coating optimum for sample NO_3^- is 10 minutes.

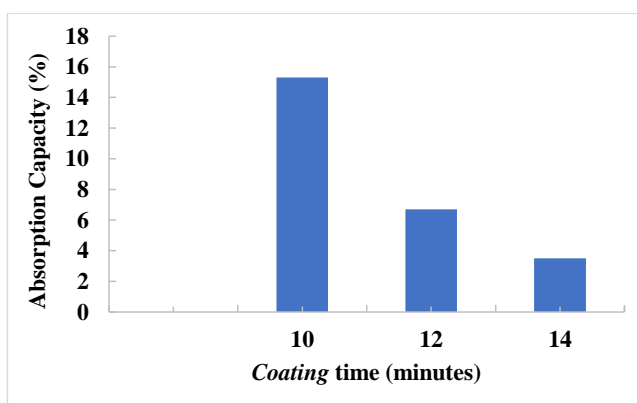


Figure 3. Effect of coating time on silica-PEG in absorption NO_3^- 15 ppm at room temperature.

3.3. Effect of silica and PEG ratio on the effectiveness of silica-PEG

Ratio weight between silica and PEG was observed to investigate the heavy influence of silica-PEG's effectiveness. It was conducted with 1:3; 1:5; 1:7; 1:8 (w:w) of variation. Figure 3 shows the effect of the ratio silica-PEG on the absorption of NO_3^- 15 ppm in a temperature room. There is a difference of approximately 5% between each observed ratio variation. This matter caused an existing difference in the interaction between PEG and NO_3^- . Ratio Optimum coating process silica-PEG is at 1:5 with a NO_3^- absorption value of 27%.

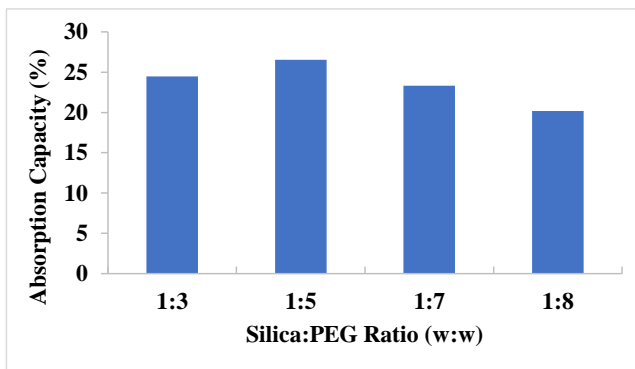


Figure 3. Effect of coating time on effectiveness silica-PEG in absorption NO_3^- 15 ppm at room temperature.

3.4. Effect of PEG concentration on the effectiveness of silica-PEG

The effect of variations in the concentration of PEG used in the silica coating process can be seen in Figure 4. It can be seen that there is an actual significant difference using PEG 15% compared to the others. The high concentration of PEG can accelerate the saturation of the active groups of silica and slow down the adsorption process. Meanwhile, if the concentration is too low, the functional group that acts as the active site in the NO_3^- absorption process will not be maximally located on the silica surface.

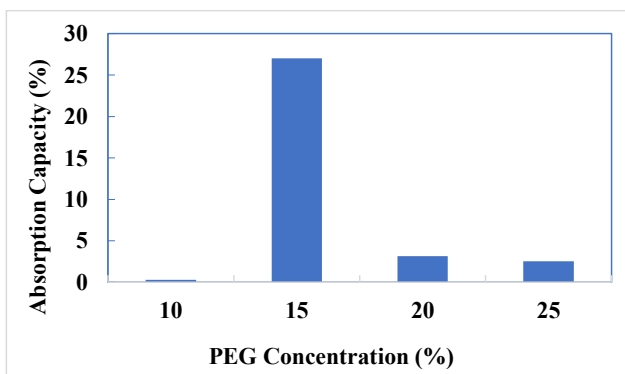


Figure 4. Effect of PEG concentration on effectiveness silica-PEG in absorption NO_3^- 15 ppm at room temperature.

3.5. Characterization of Silica-PEG

The characterization of the silica-PEG produced was carried out using Fourier Transform Infra-Red (FTIR). FTIR was used to determine and confirm the type of bonding of the organic compound groups formed on Si-PEG 4000. FTIR characterization was carried out using the mid-infrared wavelength range, which is 4000-400 cm^{-1} , as shown in Figure 5. The spectrum that appears is adjusted concerning the wavelength of the infrared spectrum, as shown in Table 1.

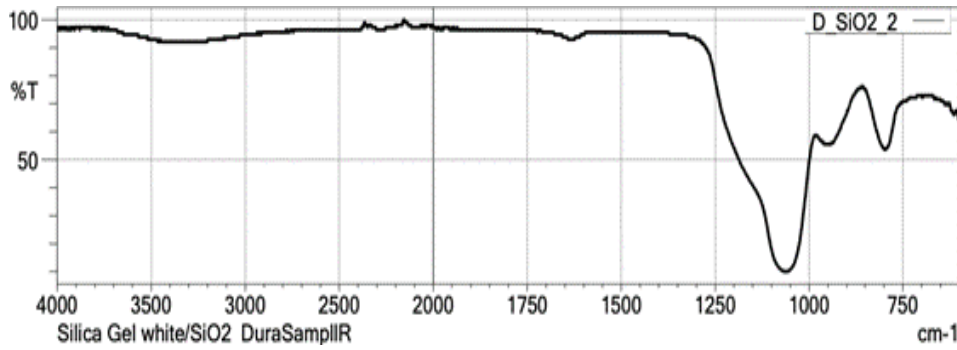


Figure 5. Fourier Transform Infrared (FTIR) spectrum of Si-PEG 4000.

Table 1. Comparison of IR spectrum wavelengths between references with Silica-PEG

Type Bond	Long Wave (cm^{-1})	
	Reference [10]	Silica-PEG
Si-OH <i>asym.streaching</i>	3700-3200	3250
OH <i>stretching</i>	3759-2500	2250
C=C <i>stretching</i>	1650-1900	1600
C-OC <i>stretching</i>	1500-800	1100
Si-O-Si <i>asym.streaching</i>	1130-800	950

From the data in table 1, it can be seen that several functional groups play an active role in the absorption process in silica-PEG. The bounding of silica and PEG was indicated by the dipole-dipole interactions. The ions between the atoms of oxygen from the long chain in PEG and silica coordinated and formed a double helix. Hence acts as an active site of the ion exchange at a wavelength of 3250 nm that is identified as an alcohol group (-OH). Thus the wavelength of 2250 was determined as a -OH group attached to Si, a wavelength of 1600 nm as a C=C double fish, a wavelength of 1100 nm as a carboxyl group, and 950 nm as an ether group.

4. Conclusions

Modifying silica with PEG in this study showed an increase in silica activity seen from the value of anion absorption capacity (NO_3^-). Where in the optimum condition of the coating process at a coating time variation of 10 minutes, the interpretation of the silica: PEG ratio was 1:5, and the PEG

concentration was 15%. Silica-PEG has the potential to be used as an alternative adsorbent for the absorption of NO_3^- ions with the following investigation.

5. Acknowledgments


The author would like to thank the research funding assistance through the Internal Grant for the basic research scheme through the Ahmad Dahlan University Research and Community Service Institute, Yogyakarta. Thank Prof. Toyohide Takeuchi, Prof. Lee Wah Lim, Chemistry and Biomolecular Science, Faculty of Engineering, Gifu University, and Prof. Fuseng Li, River Basin Research Center, Gifu University, Japan, who has facilitated the implementation of this research.



References




- Fonny JL Risamasu, & Hanif Budi Prayitno. (2011). Study of Phosphate, Nitrite, Nitrate and Silicate Nutrients in Matasiri Archipelago Waters, Strait Kalimantan. *MARINE SCIENCES*, 16 (3), 135–142.
- Gazali, I., Widiatmono, R., Wirosodarmo, R., Engineering, J., Technology, P.-F., Brawijaya, P.-U., Veterans, J., & Correspondence, P. (2013). Evaluation of the Impact of Disposal of Paper Mill Liquid Waste on the Water Quality of the Klinter River, Nganjuk Regency. In *Journal of Tropical Agricultural Engineering and Biosystems* (Vol. 1, Issue 2).
- Hamza, SF, El-Sawy, MM, Alian, NA, & Shaker, NO (2021). Synthesis and evaluation of performance characteristics green composites from sustainable fatty chitosan graft copolymer with acrylic acid for wastewater treatment. *Egyptian Journal of Chemistry*, 64 (10), 6007–6015. <https://doi.org/10.21608/ejchem.2021.73857.3656>
- Heru Prihadi, T., Nurbani Rohmah, N., Chemical Studies FST Syarif Hidayatullah State Islamic University Jakarta, P., Marine and Fisheries Research, B., & Sunday South Jakarta, P. (2008). Analysis of Phosphate and N-Nitrogen (Ammonia, Nitrate, Nitrite) Levels in Brackish Water Ponds due to Lapindo Mud Seepage. *Journal of Valence Chemistry*, 1 (3), 135–143. <http://www.foxitsoftware.com>
- Ita Emilia. (2019). ANALYSIS OF NITRATE AND NITRITE CONTENT IN REFILLED DRINKING WATER USING UV-Vis SPECTROPHOTOMETRY METHOD. *Indobioscience Journal*, 1 (1). http://univpgri-palembang.ac.id/e_jurnal/index.php/biosains
- Julhim S Tangio. (2013). Adsorption of Lead (Pb) Using Water Hyacinth (Eichhorniacrassipes) Biomass. *JOURNAL OF ENTROPHY*, 8 (1), 500–506.
- Linda, R., Lim, LW, & Takeuchi, T. (2013). Poly(ethylene oxide)-bonded stationary phase for separation of inorganic anions in capillary ion chromatography. *Journal of Chromatography A*, 1294, 117–121. <https://doi.org/10.1016/j.chroma.2013.04.052>
- Nur'aeni, D., Prabowo Hadisantoso, E., Suhendar, DD, Chemistry, J., Science, F., Technology, D., Gunung, S., Bandung, D., Nasution, JAH, 105 Cibiru, N., & Bandung, K. (2017). *ADSORPTION OF METAL IONS Mn²⁺ AND Cu²⁺ BY SILICA GEL FROM SUGARCANE BAGS ASH* (Vol. 4, Issue 2).
- Puspa, H., Giri, D., Sudiarta, W., Raka, IA, & Asih, A. (nd). OPTIMIZATION OF ADSORPTION OF Cr(VI) ON SILICA GEL FROM MODIFIED RICE HUSK ASH OF Di(phenyl)carbazine (Si-DPZide). In *JOURNAL OF CHEMISTRY* (Vol. 8, Issue 2).
- Rahayu, A., Jamilatun, S., Aldilla Fajri, J., & Wah Lim, L. (2021). CHARACTERIZATION OF ORGANIC POLYMER MONOLITH COLUMNS CONTAINING AMMONIUM QUARternary AS INITIAL STUDY FOR CAPILLARY CHROMATOGRAPHY. *Journal of Islamic Science and Technology*, 7 (1). <https://doi.org/10.22373/ekw.v7.i1.8764>
- Rahayu, A., Lim, LW, & Takeuchi, T. (2015). Polymer monolithic methacrylate base modified with tosylated-polyethylene glycol monomethyl ether as a stationary phase for capillary liquid chromatography. *Talanta*, 134, 232–238. <https://doi.org/10.1016/j.talanta.2014.10.060>

- Rong, L., Lim, LW, & Takeuchi, T. (2006). Determination of iodide in seawater samples by ion chromatography with chemically-bonded poly(ethylene glycol) stationary phase. *Journal of Chromatography A* , 1128 (1–2), 68–72. <https://doi.org/10.1016/j.chroma.2006.06.041>
- Rong, L., & Takeuchi, T. (2004). Determination of iodide in seawater and edible salt by microcolumn liquid chromatography with poly(ethylene glycol) stationary phase. *Journal of Chromatography A* , 1042 (1–2), 131–135. <https://doi.org/10.1016/j.chroma.2004.05.032>
- Umar, SNH, Akhtar, MN, Bakar, EA, Kamaruddin, NM, & Othman, AR (2020). Development of heavy metal potentiostat for batik industry. *Applied Sciences (Switzerland)* , 10 (21), 1–12. <https://doi.org/10.3390/app10217804>
- Wah LIM, L., Rong, L., & Takeuchi, T. (2012). Polyoxyethylene as the Stationary Phase in Ion Chromatography. *Analytical Science* , 28 (March).

Lampiran 2

[EKW] Editor Decision (do not reply to this email) 

 **Muhammad Ridwan Harahap** <jurnal@ar-raniry.ac.id>
to me 

Thu, Aug 11, 2022, 4:50 PM   

Dear Aster Rahayu:


We have reached a decision regarding your submission to Elkawnie: Journal of Islamic Science and Technology, "SYNTHESIS SILICA-PEG BY PHYSICALLY COATING WITH PEG 4000 FOR ABSORPTION OF ION NITRATE".

Our decision is to: Resubmit for Review

Muhammad Ridwan Harahap
(Scopus ID: 57443545800) Department of Chemistry, Faculty of Science and Technology, Universitas Islam Negeri Ar-Raniry, Banda Aceh
rdwankimia@ar-raniry.ac.id

This is an automated message. Please do not reply to this email.

Elkawnie: Journal of Islamic Science and Technology
<http://jurnal.ar-raniry.ac.id/index.php/elkawnie>

One attachment • Scanned by Gmail 

SYNTHESIS SILICA-PEG BY PHYSICALLY COATING WITH PEG 4000 FOR ABSORPTION OF ION NITRATE

Aster Rahayu*, Maryudi**, Joni Aldilla Fajri***, Muhammad Fariq Fajar****, Toby Kurniawan*****

*Departement of Chemical Engineering, Universitas Ahmad Dahlan, Yogyakarta, Indonesia,

aster.rahayu@che.uad.ac.id

**Departement of Chemical Engineering, Universitas Ahmad Dahlan, Yogyakarta, Indonesia,

maryudi@che.uad.ac.id

***Departement of Environmental Engineering, Universitas Islam Indonesia, Yogyakarta, Indonesia,

joni.af@uii.ac.id

****Departement of Chemical Engineering, Universitas Ahmad Dahlan, Yogyakarta, Indonesia,

muhammad1800020013@webmail.uad.ac.id

*****Departement of Chemical Engineering, Universitas Ahmad Dahlan, Yogyakarta, Indonesia,

tobby1800020033@webmail.uad.ac.id

Email Correspondence: aster.rahayu@che.uad.ac.id

Received :

Accepted :

Published :

Abstract: All production activities will eventually produce waste, especially liquid waste. This liquid waste usually empties into rivers and ends up in the sea. One of the substances in liquid waste is nitrate ion (NO_3^-) which in abundance can interfere with water systems and health. Several methods can be used to treat the nitrate contained in the water, such as adsorption. In this research, the adsorbent will be prepared from modified silica gel with PEG 4000 by physical coating. Several parameters will be observed, including the effect of coating time, silica-PEG ratio, PEG concentration, and coating temperature. The performance of silica-PEG to absorb NO_3^- is investigated. Characterization of functional group content in silica-PEG was carried out by Fourier Transform InfraRed (FTIR). The study results show that coating time was 10 minutes with the ratio of silica and PEG 1:5, and the concentration of PEG used was 15%, indicating the optimum performance of silica-PEG when used as a NO_3^- adsorbent. The ability of silica-PEG as a porous material is evidenced by an increase in the absorption capacity of silica-PEG compared to silica gel without the PEG coating process.

Keywords: Adsorption; Nitrates, PEGs; Silica coating

6. Introduction

Indonesia is one of the industrial countries, contributing to more than 20% of the Indonesian economy. It makes Indonesia the top 10 in the world in the category of manufacturing value-added. Along with the rapid development of industry in Indonesia, it cannot be separated from the problem of environmental pollution, one of which is water pollution. With increasing industrial growth in Indonesia, it has the potential to negatively impact ecological quality, especially waters, due to the imperfect processing of liquid waste produced by an industry. There is reinforced based on data collected from the Indonesian statistical agency in the environmental field; the level of water pollution in Indonesia has increased by 10% in recent years.

Physical, chemical, and biological parameters become the reference for determining water quality. The physical parameters include the value of turbidity, temperature, color, discharge, Total Dissolved Solid (TDS), and Total Suspended Solid (TSS). The chemical parameters include BOD, COD, DO, pH, nitrate content, nitrite, phosphate, and heavy metals. As for biology, the range of microorganisms is contained. One of the parameters of concern in testing water quality is the nitrite content. Increasing nitrate content in water can result in increased nutrient content in water. These nutrients are beneficial for the survival of aquatic biotas such as algae and bacteria. At a specific value limit, the presence of these nutrients will not have an effect, but at a high enough concentration, it will cause changes in function due to the eutrophication process.

One of the efforts to deal with water pollution due to industrial waste in Indonesia can be made with the adsorption method. The use of silica as a nitrate ion adsorbent in wastewater has been widely carried out. The use of silica is based on its properties which have a distinctive surface area and large pores. Several studies

have been carried out to obtain silica as an adsorbent, heavy metal with reasonable effectiveness, such as silica to absorb heavy metal waste iron (Fe), resulting in a decrease in Fe content of more than 0.1 ppm. Silica has also been successfully used as an adsorbent to reduce Mn^{2+} , Cd, Cr^{3+} , and Cu^{2+} in wastewater and nitrate levels in drinking water. (Fonny JL Risamasu & Hanif Budi Prayitno, 2011). Silica, a silicon oxide with a chemical formula (SiO_2), is an oxide that does not have an active group. Due to optimizing the potential of silica, the coating is done with polyethylene glycol (PEG). As a polymer, PEG has a primary hydroxyl group at the end of the polyether chain which is containing oxyethylene. It can form a double helix with intermolecular interactions. The functional groups in PEG can provide several other interactions, such as hydrogen bonding and dipole-dipole interactions,

This study aims to increase the effectiveness of silica by using a coating method with PEG. The absorption ability of silica PEG coating will be used as an adsorbent for the absorption of nitrate ions (NO_3^-). The ability of silica-PEG will be proven by comparing it with silica gel without going through a coating process on the absorption of nitrate ions.

7. Material And Methods

2.1 Materials

The materials used in this study included silica gel, PEG 4000 (Nacalai Tesque, Kyoto, Japan), $NaNO_3$ (Nacalai Tesque, Kyoto, Japan), Brucine Sulfate (Nacalai Tesque, Kyoto, Japan), Ethanol (Wako 1st Grade), Sulfuric Acid (Wako 1st Grade), NaCl (Nacalai Tesque, Kyoto, Japan) and Aquadest.

2.2 Apparatus

The detection of NO_3^- in terms of concentration, Spectrophotometry UV-Vis (Thermo Scientific-Genesys) was carried out. Furthermore, identifying the functional group in the polymer was carried out using Fourier Transform InfraRed (FTIR) Spectrum 400 Series Perkin Elmer.

2.3 Synthesis of Silica-PEG

Silica gel was modified with PEG and was carried out by weighing 3 grams of PEG 4000, dissolved in 20 ml of 98% ethanol, and then mixed with 5 grams of silica. The coating was carried out with a stirrer for a predetermined time. Then, separated silica with PEG. The performance of Silica-PEG was investigated to absorb NO_3^- using UV-Vis spectrophotometry.

8. Discussion

3.1 Modification of Silica with PEG 4000

Modification of silica gel using PEG 4000 through method physical coating. It was conducted by studying several factors affecting the silica modification process and results. Silica gel with a predetermined weight will be in physical contact with PEG 4000, and its effectiveness will be observed. And passivity absorption. In this case, the modified absorption power test silica will be done by contacting it with NO_3^- . The parameters observed were the contact time factor between PEG 4000 and silica, the ratio between silica and PEG 4000, the concentration of PEG 4000 used, and a temperature ongoing physical coating. Silica-PEG is contacted with 15 ppm NO_3^- ions in the subsequent measurement. The measurement of NO_3^- was carried out using UV-Vis Spectroscopy.

Silica-PEG formed with the coating process. The coating process lasts only on surface silica. Physically coating occurs based on the Van Der Waals Force Force interface between the silica and PEG surfaces. Silica has site active group silanol (Si-OH) and siloxane (Si-O-Si), a cluster -OH on

the surface active site of silica gel with low polarizability. The presence of polarizability dramatically affects the movement or displacement of electrons on the silica surface. In theory, a vast surface of nano silica interacts with the polymer chains, thereby reducing the freedom of movement of the PEG 4000 polymer chains. Visually there is a color change in the silica gel used, shown in Figure 1.

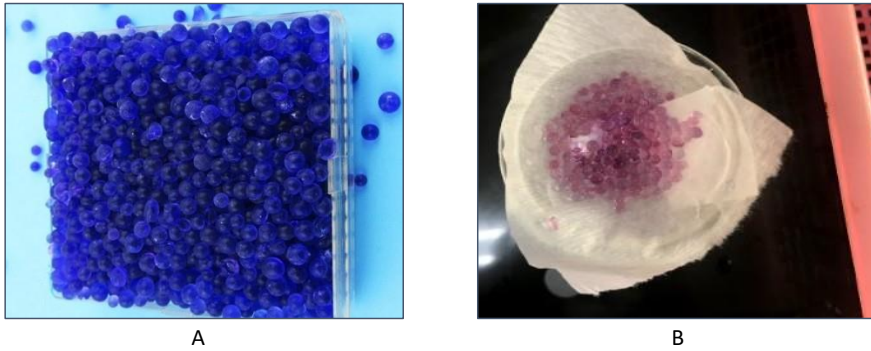


Figure 1. Visual silica gel. A. Silica gel before the coating process with PEG. B. Silica gel after processing coating with PEG

3.2 Effect of coating time on the effectiveness of silica-PEG

The effect of coating time on the effectiveness of silica-PEG was carried out on the absorption of anions. The anion used is NO_3^- ion with a concentration of 15 ppm. Absorption was carried out for 10 minutes at room temperature. The absorption results can be seen in Figure 2. It can be seen that the longer the coating time there is a decrease the effect of the silica-PEG, which is indicated by a reduction in the absorption capacity value (%). These can be caused by a fall layer of PEG that coats the silica surface due to prolonged contact between silica and PEG. The interaction between silica and PEG for 10 minutes in this coating time parameter shows a better capacity value than the other coating times. Due to weak silanol and siloxane bonds on silica gel, the highest adsorption occurred at 10 minutes with an adsorption value of 15%, so the used time coating optimum for sample NO_3^- is 10 minutes.

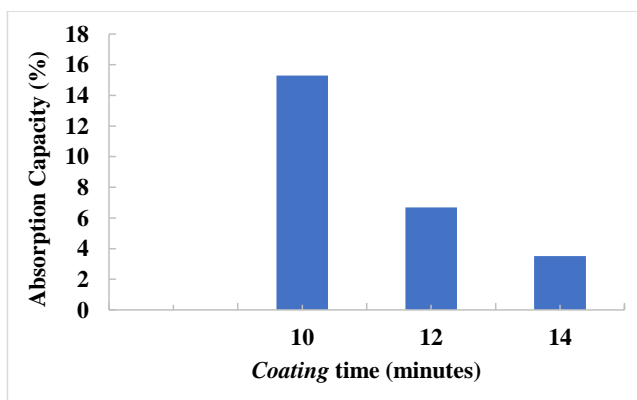


Figure 3. Effect of coating time on silica-PEG in absorption NO_3^- 15 ppm at room temperature.

3.3. Effect of silica and PEG ratio on the effectiveness of silica-PEG

Ratio weight between silica and PEG was observed to investigate the heavy influence of silica-PEG's effectiveness. It was conducted with 1:3; 1:5; 1:7; 1:8 (w:w) of variation. Figure 3 shows the effect of the ratio silica-PEG on the absorption of NO_3^- 15 ppm in a temperature room. There is a difference of approximately 5% between each observed ratio variation. This matter caused an existing difference in the interaction between PEG and NO_3^- . Ratio Optimum coating process silica-PEG is at 1:5 with a NO_3^- absorption value of 27%.

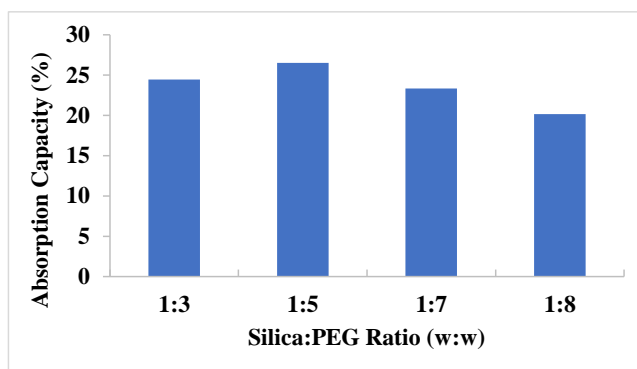


Figure 3. Effect of coating time on effectiveness silica-PEG in absorption NO_3^- 15 ppm at room temperature.

3.4. Effect of PEG concentration on the effectiveness of silica-PEG

The effect of variations in the concentration of PEG used in the silica coating process can be seen in Figure 4. It can be seen that there is an actual significant difference using PEG 15% compared to the others. The high concentration of PEG can accelerate the saturation of the active groups of silica and slow down the adsorption process. Meanwhile, if the concentration is too low, the functional group that acts as the active site in the NO_3^- absorption process will not be maximally located on the silica surface.

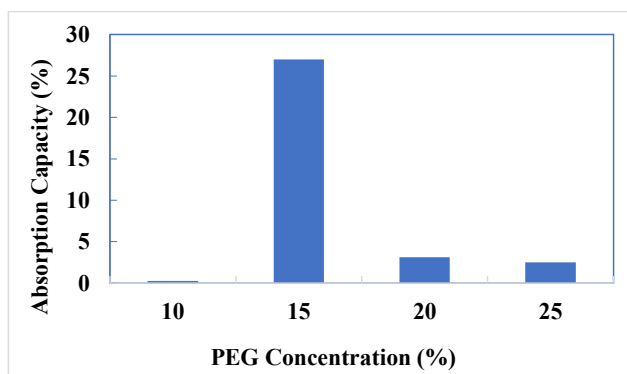


Figure 4. Effect of PEG concentration on effectiveness silica-PEG in absorption NO_3^- 15 ppm at room temperature.

3.5. Characterization of Silica-PEG

The characterization of the silica-PEG produced was carried out using Fourier Transform Infra-Red (FTIR). FTIR was used to determine and confirm the type of bonding of the organic compound groups formed on Si-PEG 4000. FTIR characterization was carried out using the mid-infrared wavelength range, which is 4000-400 cm^{-1} , as shown in Figure 5. The spectrum that appears is adjusted concerning the wavelength of the infrared spectrum, as shown in Table 1.

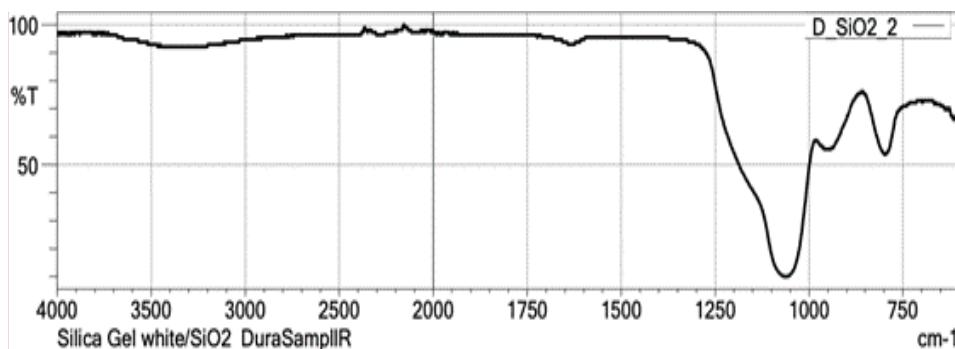


Figure 5. Fourier Transform Infrared (FTIR) spectrum of Si-PEG 4000.

Table 1. Comparison of IR spectrum wavelengths between references with Silica-PEG

Type Bond	Long Wave (cm^{-1})	
	Reference [10]	Silica-PEG
Si-OH <i>asym.stretching</i>	3700-3200	3250
OH <i>stretching</i>	3759-2500	2250
C=C <i>stretching</i>	1650-1900	1600
C-OC <i>stretching</i>	1500-800	1100
Si-O-Si <i>asym.stretching</i>	1130-800	950

From the data in table 1, it can be seen that several functional groups play an active role in the absorption process in silica-PEG. The bonding of silica and PEG was indicated by the dipole-dipole interactions. The ions between the atoms of oxygen from the long chain in PEG and silica coordinated and formed a double helix. Hence acts as an active site of the ion exchange at a wavelength of 3250 nm that is identified as an alcohol group (-OH). Thus the wavelength of 2250 was determined as a -OH group attached to Si, a wavelength of 1600 nm as a C=C double fish, a wavelength of 1100 nm as a carboxyl group, and 950 nm as an ether group.

9. Conclusions

Modifying silica with PEG in this study showed an increase in silica activity seen from the value of anion absorption capacity (NO_3^-). Where in the optimum condition of the coating process at a coating time variation of 10 minutes, the interpretation of the silica: PEG ratio was 1:5, and the PEG

Commented [U1]: Please using the professional software for making this chart

concentration was 15%. Silica-PEG has the potential to be used as an alternative adsorbent for the absorption of NO_3^- ions with the following investigation.

10. Acknowledgments

The author would like to thank the research funding assistance through the Internal Grant for the basic research scheme through the Ahmad Dahlan University Research and Community Service Institute, Yogyakarta. Thank Prof. Toyohide Takeuchi, Prof. Lee Wah Lim, Chemistry and Biomolecular Science, Faculty of Engineering, Gifu University, and Prof. Fuseng Li, River Basin Research Center, Gifu University, Japan, who has facilitated the implementation of this research.

References

- Fonny JL Risamasu, & Hanif Budi Prayitno. (2011). Study of Phosphate, Nitrite, Nitrate and Silicate Nutrients in Matasiri Archipelago Waters, Strait Kalimantan. *MARINE SCIENCES*, 16 (3), 135–142.
- Gazali, I., Widiatmono, R., Wirosodarmo, R., Engineering, J., Technology, P.-F., Brawijaya, P.-U., Veterans, J., & Correspondence, P. (2013). Evaluation of the Impact of Disposal of Paper Mill Liquid Waste on the Water Quality of the Klinter River, Nganjuk Regency. In *Journal of Tropical Agricultural Engineering and Biosystems* (Vol. 1, Issue 2).
- Hamza, SF, El-Sawy, MM, Alian, NA, & Shaker, NO (2021). Synthesis and evaluation of performance characteristics green composites from sustainable fatty chitosan graft copolymer with acrylic acid for wastewater treatment. *Egyptian Journal of Chemistry*, 64 (10), 6007–6015. <https://doi.org/10.21608/ejchem.2021.73857.3656>
- Heru Prihadi, T., Nurbani Rohmah, N., Chemical Studies FST Syarif Hidayatullah State Islamic University Jakarta, P., Marine and Fisheries Research, B., & Sunday South Jakarta, P. (2008). Analysis of Phosphate and N-Nitrogen (Ammonia, Nitrate, Nitrite) Levels in Brackish Water Ponds due to Lapindo Mud Seepage. *Journal of Valence Chemistry*, 1 (3), 135–143. <http://www.foxitsoftware.com>
- Ita Emilia. (2019). ANALYSIS OF NITRATE AND NITRITE CONTENT IN REFILLED DRINKING WATER USING UV-Vis SPECTROPHOTOMETRY METHOD. *Indobioscience Journal*, 1 (1). http://univpgri-palembang.ac.id/e_jurnal/index.php/biosains
- Julhim S Tangio. (2013). Adsorption of Lead (Pb) Using Water Hyacinth (Eichhorniacrassipes) Biomass. *JOURNAL OF ENTROPHY*, 8 (1), 500–506.
- Linda, R., Lim, LW, & Takeuchi, T. (2013). Poly(ethylene oxide)-bonded stationary phase for separation of inorganic anions in capillary ion chromatography. *Journal of Chromatography A*, 1294, 117–121. <https://doi.org/10.1016/j.chroma.2013.04.052>
- Nur'aeni, D., Prabowo Hadisantoso, E., Suhendar, DD, Chemistry, J., Science, F., Technology, D., Gunung, S., Bandung, D., Nasution, JAH, 105 Cibiru, N., & Bandung, K. (2017). ADSORPTION OF METAL IONS Mn^{2+} AND Cu^{2+} BY SILICA GEL FROM SUGARCANE BAGS ASH (Vol. 4, Issue 2).
- Puspa, H., Giri, D., Sudiarta, W., Raka, IA, & Asih, A. (nd). OPTIMIZATION OF ADSORPTION OF Cr(VI) ON SILICA GEL FROM MODIFIED RICE HUSK ASH OF DiPhenylcarbazine (Si-DPZide). In *JOURNAL OF CHEMISTRY* (Vol. 8, Issue 2).
- Rahayu, A., Jamilatun, S., Aldilla Fajri, J., & Wah Lim, L. (2021). CHARACTERIZATION OF ORGANIC POLYMER MONOLITH COLUMNS CONTAINING AMMONIUM QUARTERNARY AS INITIAL STUDY FOR CAPILLARY CHROMATOGRAPHY. *Journal of Islamic Science and Technology*, 7 (1). <https://doi.org/10.22373/ekw.v7.i1.8764>
- Rahayu, A., Lim, LW, & Takeuchi, T. (2015). Polymer monolithic methacrylate base modified with tosylated-polyethylene glycol monomethyl ether as a stationary phase for capillary liquid chromatography. *Talanta*, 134, 232–238. <https://doi.org/10.1016/j.talanta.2014.10.060>

Commented [U2]: Please attach the contract agreement number

Commented [U3]: The number of references is at least 15 articles with reference to the minimum of the last five years from the year of submission. Updated articles as much as 50% of the number of references cited. If it is not enough, please add the appropriate literacy.

Commented [U4]: The bibliography only contains libraries that are cited in the script and follow the American Psychological Association (APA) edition Style rules.

- Rong, L., Lim, LW, & Takeuchi, T. (2006). Determination of iodide in seawater samples by ion chromatography with chemically-bonded poly(ethylene glycol) stationary phase. *Journal of Chromatography A* , 1128 (1–2), 68–72. <https://doi.org/10.1016/j.chroma.2006.06.041>
- Rong, L., & Takeuchi, T. (2004). Determination of iodide in seawater and edible salt by microcolumn liquid chromatography with poly(ethylene glycol) stationary phase. *Journal of Chromatography A* , 1042 (1–2), 131–135. <https://doi.org/10.1016/j.chroma.2004.05.032>
- Umar, SNH, Akhtar, MN, Bakar, EA, Kamaruddin, NM, & Othman, AR (2020). Development of heavy metal potentiostat for batik industry. *Applied Sciences (Switzerland)* , 10 (21), 1–12. <https://doi.org/10.3390/app10217804>
- Wah LIM, L., Rong, L., & Takeuchi, T. (2012). Polyoxyethylene as the Stationary Phase in Ion Chromatography. *Analytical Science* , 28 (March).

Lampiran 3

[EKW] Editor Decision (do not reply to this email) 



Muhammad Ridwan Harahap <jurnal@ar-raniry.ac.id>
to me ▾

Wed, Aug 24, 2022, 4:28 PM ☆ ↶ ⋮

Dear Aster Rahayu:

We have reached a decision regarding your submission to Elkawnie: Journal of Islamic Science and Technology, "SYNTHESIS SILICA-PEG BY PHYSICALLY COATING WITH PEG 4000 FOR ABSORPTION OF ION NITRATE".

Our decision is to: Resubmit for Review

Muhammad Ridwan Harahap
(Scopus ID: 57443545800) Department of Chemistry, Faculty of Science and Technology, Universitas Islam Negeri Ar-Raniry, Banda Aceh
rdwankimia@ar-raniry.ac.id

This is an automated message. Please do not reply to this email.

Elkawnie: Journal of Islamic Science and Technology
<http://jurnal.ar-raniry.ac.id/index.php/elkawnie>

One attachment • Scanned by Gmail 



SYNTHESIS SILICA-PEG BY PHYSICALLY COATING WITH PEG 4000 FOR ABSORPTION OF ION NITRATE

Aster Rahayu^{*}, Maryudi^{**}, Joni Aldilla Fajri^{***}, Nuraini^{****}, Muhammad Fariq Fajar^{*****}, Toby Kurniawan^{*****}

^{*}Departement of Chemical Engineering, Universitas Ahmad Dahlan, Yogyakarta, Indonesia,

aster.rahayu@che.uad.ac.id

^{**}Departement of Chemical Engineering, Universitas Ahmad Dahlan, Yogyakarta, Indonesia,

maryudi@che.uad.ac.id

^{***}Departement of Environmental Engineering, Universitas Islam Indonesia, Yogyakarta, Indonesia,

joni.af@uii.ac.id

^{****}Graduate Program of Chemical Engineering, Universitas Ahmad Dahlan, Yogyakarta, Indonesia,

nuraini1800020131@webmai.uad.ac.id

^{*****}Departement of Chemical Engineering, Universitas Ahmad Dahlan, Yogyakarta, Indonesia,

muhhammad1800020013@webmail.uad.ac.id

^{*****}Departement of Chemical Engineering, Universitas Ahmad Dahlan, Yogyakarta, Indonesia,

tobby1800020033@webmail.uad.ac.id

Email Correspondence: aster.rahayu@che.uad.ac.id

Received :

Accepted :

Published :

Abstract: All production activities will eventually produce waste, especially liquid waste. This liquid waste usually empties into rivers and ends up in the sea. One of the substances in liquid waste is nitrate ion (NO_3^-) which in abundance can interfere with water systems and health. Several methods can be used to treat the nitrate contained in the water, such as adsorption. In this research, the adsorbent will be prepared from modified silica gel with PEG 4000 by physical coating. Several parameters will be observed, including the effect of coating time, silica-PEG ratio, PEG concentration, and coating temperature. The performance of silica-PEG to absorb NO_3^- is investigated. Characterization of functional group content in silica-PEG was carried out by Fourier Transform InfraRed (FTIR). The study results show that coating time was 10 minutes with the ratio of silica and PEG 1:5, and the concentration of PEG used was 15%, indicating the optimum performance of silica-PEG when used as a NO_3^- adsorbent. The ability of silica-PEG as a porous material is evidenced by an increase in the absorption capacity of silica-PEG compared to silica gel without the PEG coating process.

Keywords: Adsorption; Nitrates, PEGs; Silica coating

X

1. Introduction

Indonesia is one of the industrial countries, contributing to more than 20% of the Indonesian economy. It makes Indonesia the top 10 in the world in the category of manufacturing value-added. Along with the rapid development of industry in Indonesia, it cannot be separated from the problem of environmental pollution, one of which is water pollution (Hamza et al., 2021). With increasing industrial growth in Indonesia, it has the potential to negatively impact ecological quality, especially waters, due to the imperfect processing of liquid waste produced by an industry. There is reinforced based on data collected from the Indonesian statistical agency in the environmental field, the level of water pollution in Indonesia has increased by 10% in recent years (Luh et al., 2017). Physical, chemical, and biological parameters become the reference for determining water quality. The physical parameters include the value of turbidity, temperature, color, discharge, Total Dissolved Solid (TDS), and Total Suspended Solid (TSS). The chemical parameters include BOD, COD, DO, pH, nitrate content, nitrite, phosphate, and heavy metals (Hamza et al., 2021). As for biology, the range of microorganisms is contained. The parameters of concern in testing water quality is the nitrite content. Increasing nitrate content in water can result in increased nutrient content in water. These nutrients are beneficial for the survival of aquatic biotas such as algae and bacteria (Deswati et al., 2020). At a specific value limit, the presence of these nutrients will not have an effect, but at a high enough concentration, it will cause changes in function due to the eutrophication process.

Commented [U5]: Please check this section. The maximum number of authors is 5 people. We suggest that other names be put in the acknowledgement section

Commented [U6]: Abstract consists of Introduction, aim, methods, results and conclusions. We can't find the aim

Commented [U7]: Introduction

Commented [U8]: Methods

Commented [U9]: Result

Commented [U10]: Conclusion

Commented [U11]: Please add the abstract in Indonesian

One of the efforts to deal with water pollution due to industrial waste in Indonesia can be made with the adsorption method. The use of silica as a nitrate ion adsorbent in wastewater has been widely carried out. The use of silica is based on its properties which have a distinctive surface area and large pores. Several studies have been carried out to obtain silica as an adsorbent, heavy metal with reasonable effectiveness, such as silica to absorb heavy metal waste iron (Fe) (Erdoo et al., 2020), resulting in a decrease in Fe content of more than 0.1 ppm. Silica has also been successfully used as an adsorbent to reduce Pb^{2+} (Julhim, 2013, Yusmaniar et al., 2017, Naat et al., 2021), Mn^{2+} (Omri, 2012), Cd (Buhani, 2009), Cr^{3+} (Choi et al., 2018, Rodiah et al., 2021), Mg^{2+} (Azmiyawati, 2004) and Cu^{2+} (Naat et al., 2021, Radi et al., 2015, Fathurrahman, 2020) wastewater and nitrate levels in drinking water (Rahayu et al., 2015). Silica, a silicon oxide with a chemical formula (SiO_2), is an oxide that does not have an active group. Several studies reported silica-based optimization for adsorbing heavy metal such as using sulfonate functional group (Azmiyawati, 2004). However less reported optimizing the potential of silica with polymer specifically polyethylene glycol (PEG) by physically coating (Rong et al., 2004, Bagheri et al., 2014) and chemically (Rong et al., 2006). As a polymer, PEG has a primary hydroxyl group at the end of the polyether chain which is containing oxyethylene. It can form a double helix with intermolecular interactions (Rahayu et al., 2015). The functional groups in PEG can provide several other interactions, such as hydrogen bonding and dipole-dipole interactions (Takeuchi et al., 2012, Rong et al., 2006). This study aims to increase the effectiveness of silica by using a coating method with PEG. The absorption ability of silica PEG coating will be used as an adsorbent for the absorption of nitrate ions (NO_3^-). The ability of silica-PEG will be proven by comparing it with silica gel without going through a coating process on the absorption of nitrate ions.

2. Material And Methods

2.1 Materials

The materials used in this study included silica gel, PEG 4000 (Nacalai Tesque, Kyoto, Japan), $NaNO_3$ (Nacalai Tesque, Kyoto, Japan), Brucine Sulfate (Nacalai Tesque, Kyoto, Japan), Ethanol (Wako 1st Grade), Sulfuric Acid (Wako 1st Grade), NaCl (Nacalai Tesque, Kyoto, Japan) and Aquadest.

2.2 Apparatus

The detection of NO_3^- in terms of concentration, Spectrophotometry UV-Vis (Thermo Scientific-Genesys) was carried out. Furthermore, identifying the functional group in the polymer was carried out using Fourier Transform InfraRed (FTIR) Spectrum 400 Series Perkin Elmer.

2.3 Synthesis of Silica-PEG

Silica gel was modified with PEG and was carried out by weighing 3 grams of PEG 4000, dissolved in 20 ml of 98% ethanol, and then mixed with 5 grams of silica. The coating was carried out with a stirrer for a predetermined time. Then, separated silica with PEG. The performance of Silica-PEG was investigated to absorb NO_3^- using UV-Vis spectrophotometry.

3. Discussion

3.1 Modification of Silica with PEG 4000

Modification of silica gel using PEG 4000 through method physical coating. It was conducted by studying several factors affecting the silica modification process and results. Silica gel with a predetermined weight will be in physical contact with PEG 4000, and its effectiveness will be observed. And passivity absorption. In this case, the modified absorption power test silica will be done by contacting it with NO_3^- . The parameters observed were the contact time factor between PEG 4000 and silica, the ratio between silica and PEG 4000, the concentration of PEG 4000 used, and a

Commented [U12]: In the discussion section, this paper is not interesting to continue. We suggest that this paper should add supporting literacy from similar or intersecting research. Then you compare your research results with the literacy you quoted to see an advantage from the data you convey to readers. You are not just explaining the interpretation of your data

temperature ongoing physical coating. Silica-PEG is contacted with 15 ppm NO_3^- ions in the subsequent measurement. The measurement of NO_3^- was carried out using UV-Vis Spectroscopy.

Silica-PEG formed with the coating process. The coating process lasts only on surface silica. Physically coating occurs based on the Van Der Waals Force Force interface between the silica and PEG surfaces. Silica has site active group silanol (Si-OH) and siloxane (Si-O-Si), a cluster $-\text{OH}$ on the surface active site of silica gel with low polarizability. The presence of polarizability dramatically affects the movement or displacement of electrons on the silica surface. In theory, a vast surface of nano silica interacts with the polymer chains, thereby reducing the freedom of movement of the PEG 4000 polymer chains. Visually there is a color change in the silica gel used, shown in Figure 1.

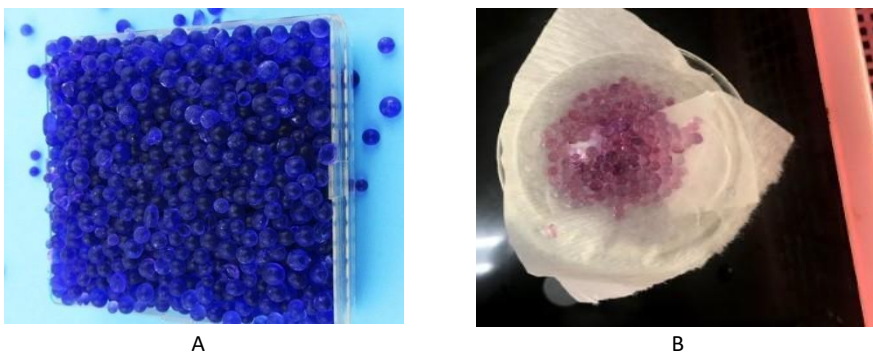


Figure 1. Visual silica gel. A. Silica gel before the coating process with PEG. B. Silica gel after processing coating with PEG

3.2 Effect of coating time on the effectiveness of silica-PEG

The effect of coating time on the effectiveness of silica-PEG was carried out on the absorption of anions. The anion used is NO_3^- ion with a concentration of 15 ppm. Absorption was carried out for 10 minutes at room temperature. The absorption results can be seen in Figure 2. It can be seen that the longer the coating time there is a decrease the effect of the silica-PEG, which is indicated by a reduction in the absorption capacity value (%). These can be caused by a fall layer of PEG that coats the silica surface due to prolonged contact between silica and PEG. The interaction between silica and PEG for 10 minutes in this coating time parameter shows a better capacity value than the other coating times. Due to weak silanol and siloxane bonds on silica gel, the highest adsorption occurred at 10 minutes with an adsorption value of 15%, so the used time coating optimum for sample NO_3^- is 10 minutes.

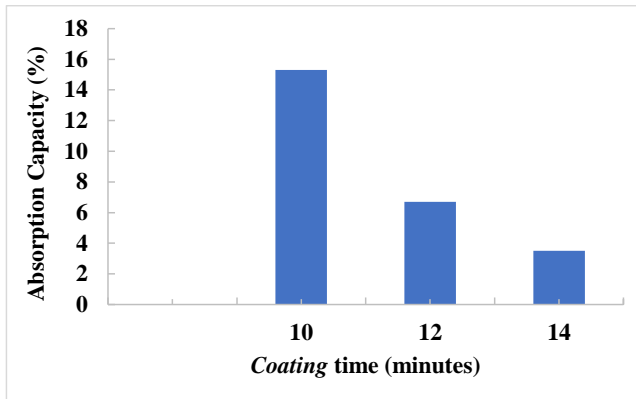


Figure 3. Effect of coating time on silica-PEG in absorption NO_3^- 15 ppm at room temperature.

3.3. Effect of silica and PEG ratio on the effectiveness of silica-PEG

Ratio weight between silica and PEG was observed to investigate the heavy influence of silica-PEG's effectiveness. It was conducted with 1:3; 1:5; 1:7; 1:8 (w:w) of variation. Figure 3 shows the effect of the ratio silica-PEG on the absorption of NO_3^- 15 ppm in a temperature room. There is a difference of approximately 5% between each observed ratio variation. This matter caused an existing difference in the interaction between PEG and NO_3^- . Ratio Optimum coating process silica-PEG is at 1:5 with a NO_3^- absorption value of 27%.

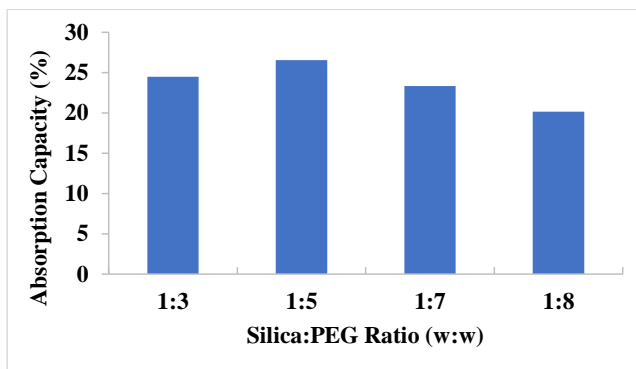


Figure 3. Effect of coating time on effectiveness silica-PEG in absorption NO_3^- 15 ppm at room temperature.

3.4. Effect of PEG concentration on the effectiveness of silica-PEG

The effect of variations in the concentration of PEG used in the silica coating process can be seen in Figure 4. It can be seen that there is an actual significant difference using PEG 15% compared to the others. The high concentration of PEG can accelerate the saturation of the active groups of silica and slow down the adsorption process. Meanwhile, if the concentration is too low, the functional group that acts as the active site in the NO_3^- absorption process will not be maximally located on the silica surface.

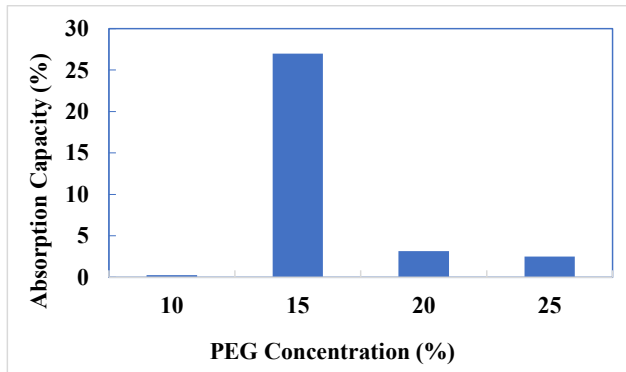


Figure 4. Effect of PEG concentration on effectiveness silica-PEG in absorption NO₃- 15 ppm at room temperature.

3.5. Characterization of Silica-PEG

The characterization of the silica-PEG produced was carried out using Fourier Transform Infra-Red (FTIR). FTIR was used to determine and confirm the type of bonding of the organic compound groups formed on Si-PEG 4000. FTIR characterization was carried out using the mid-infrared wavelength range, which is 4000-400 cm⁻¹, as shown in Figure 5. The spectrum that appears is adjusted concerning the wavelength of the infrared spectrum, as shown in Table 1.

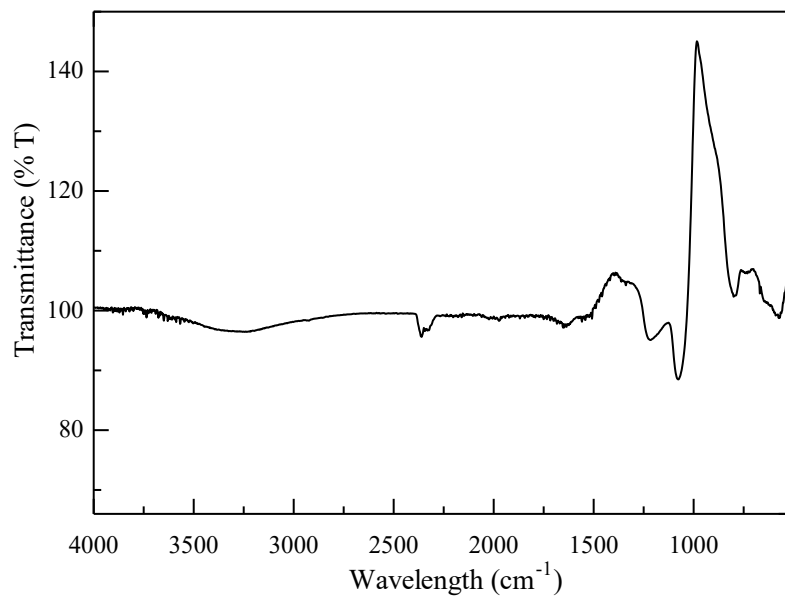


Figure 5. Fourier Transform Infrared (FTIR) spectrum of Si-PEG 4000.

Commented [U13]: Please using the professional software for making this chart

Table 1. Comparison of IR spectrum wavelengths between references with Silica-PEG

Type Bond	Long Wave (cm ⁻¹)	
	Reference [10]	Silica-PEG
Si-OH <i>asym.streaching</i>	3700-3200	3250
OH <i>stretching</i>	3759-2500	2250
C=C <i>stretching</i>	1650-1900	1600
C-OC <i>stretching</i>	1500-800	1100
Si-O-Si <i>asym.streaching</i>	1130-800	950

Commented [U14]: Please follow the table writing rules according to the article format

From the data in table 1, it can be seen that several functional groups play an active role in the absorption process in silica-PEG. The bounding of silica and PEG was indicated by the dipole-dipole interactions. The ions between the atoms of oxygen from the long chain in PEG and silica coordinated and formed a double helix. Hence acts as an active site of the ion exchange at a wavelength of 3250 nm that is identified as an alcohol group (-OH). Thus the wavelength of 2250 was determined as a -OH group attached to Si, a wavelength of 1600 nm as a C=C double bond, a wavelength of 1100 nm as a carboxyl group, and 950 nm as an ether group.

4. Conclusions

Modifying silica with PEG in this study showed an increase in silica activity seen from the value of anion absorption capacity (NO_3^-). Where in the optimum condition of the coating process at a coating time variation of 10 minutes, the interpretation of the silica: PEG ratio was 1:5, and the PEG concentration was 15%. Silica-PEG has the potential to be used as an alternative adsorbent for the absorption of NO_3^- ions with the following investigation.

5. Acknowledgments

The author would like to thank the research funding assistance through the Internal Grant with number PD-326/SP3/LPPM-UAD/IV/2021 through the Ahmad Dahlan University Research and Community Service Institute, Yogyakarta. Thank Prof. Toyohide Takeuchi, Prof. Lee Wah Lim, Chemistry and Biomolecular Science, Faculty of Engineering, Gifu University, and Prof. Fuseng Li, River Basin Research Center, Gifu University, Japan, who has facilitated the implementation of this research.

References


- Azmiyawati, C. (2004). Azmiyawati: Modifikasi Silika Gel Dengan Gugus Sulfonat Untuk Meningkatkan Kapasitas Adsorpsi Mg(Ii). In *J. Kim. Sains & Apl: Vol. VII* (Issue 1).
- Bagheri, H., & Roostaie, A. (2014). Electrospun Modified Silica-Polyamide Nanocomposite As A Novel Fiber Coating. *Journal Of Chromatography A*, 1324, 11–20. <https://doi.org/10.1016/j.chroma.2013.11.024>
- Buhani, L., & Sri Kunarti, E. (2009). Amino And Mercapto-Silica Hybrid For Cd(Ii) Adsorption In Aqueous Solution Hibrida Amino-Silika Dan Merkupto-Silika Sebagai Adsorben Untuk Adsorpsi Ion Cd(Ii) Dalam. In *Indo. J. Chem* (Vol. 9, Issue 2).
- Choi, K., Lee, S., Park, J. O., Park, J. A., Cho, S. H., Lee, S. Y., Lee, J. H., & Choi, J. W. (2018). Chromium Removal From Aqueous Solution By A Pei-Silica Nanocomposite. *Scientific Reports*, 8(1). <https://doi.org/10.1038/S41598-018-20017-9>
- Deswati, D., Yani, E., Safni, S., Norita Tetra, O., & Pardi, H. (2020). Development Methods In Aquaponics Systems Using Biofloc To Improve Water Quality (Ammonia, Nitrite, Nitrate) And Growth Of Tilapia And Samhong Mustard. *International Journal Of Environmental Analytical Chemistry*. <https://doi.org/10.1080/03067319.2020.1839437>
- Erdoo Kukwa, R., Tyoker Kukwa, D., David Oklo, A., Thaddeus Ligom, T., Ishwah, B., & Ajegi Omenka, J. (2020). Adsorption Studies Of Silica Adsorbent Using Rice Husk As A Base Material For Metal Ions Removal From Aqueous Solution. *American Journal Of Chemical Engineering*, 8(2), 48. <https://doi.org/10.11648/J.Ajche.20200802.12>
- Fathurrahman, M. (2020). Synthesis And Characterization Of Silica Gel From Corn Cob Ash And Its Adsorption Study Toward Cu(Ii) Metal Ion. *Jurnal Kartika Kimia*, 3(2). <https://doi.org/10.26874/jkk.v3i2.66>
- Hamza, S. F., El-Sawy, M. M., Alian, N. A., & Shaker, N. O. (2021). Synthesis And Evaluation Of Performance Characteristics Green Composites From Sustainable Fatty Chitosan Graft Copolymer With Acrylic Acid For Wastewater Treatment. *Egyptian Journal Of Chemistry*, 64(10), 6007–6015. <https://doi.org/10.21608/Ejchem.2021.73857.3656>
- Luh Gede Ratna Juliasih, N., Hidayat, D., & Prasetyo Ersa, M. (2017). Penentuan Kadar Nitrit Dan Nitrat Pada Perairan Teluk Lampung Sebagai Indikator Kualitas Lingkungan Perairan. In *Analit: Analytical And Environmental Chemistry* (Vol. 2, Issue 02).
- Naat, J. N., Neolaka, Y. A. B., Lapailaka, T., Rachmat Triandi, T., Sabarudin, A., Darmokoesoemo, H., & Kusuma, H. S. (2021). Adsorption Of Cu(Ii) And Pb(Ii) Using Silica@Mercapto (Hs@M) Hybrid Adsorbent Synthesized From Silica Of Takari Sand: Optimization Of Parameters And Kinetics. *Rasayan Journal Of Chemistry*, 14(1), 550–560. <https://doi.org/10.31788/Rjc.2021.1415803>



Commented [U15]: The number of references is at least **15 articles** (the primer references include journal articles, not books or quotes) with reference to the minimum of the last five years from the year of submission. Updated articles as much as 50% of the number of references cited. If it is not enough, please add the appropriate literacy. The author has **9 literacy** according to the rules.




Follow the American Psychological Association (APA) edition Style rules

- Omri, A., & Benzina, M. (2012). Removal Of Manganese(Ii) Ions From Aqueous Solutions By Adsorption On Activated Carbon Derived A New Precursor: Ziziphus Spina-Christi Seeds. *Alexandria Engineering Journal*, 51(4), 343–350. <https://doi.org/10.1016/j.aej.2012.06.003>
- Julhim S Tangio. (2013). Adsorption Of Lead (Pb) Using Water Hyacinth (Eichhorniacrassipes) Biomass. *Journal Of Entrophy*, 8 (1), 500–506.
- Radi, S., Tighadouini, S., Massaoudi, M. El, & Zaghrioui, M. (2015). *Adsorption Of Cu(Ii) Onto Novel Silica Gel-Immobilized Bithiophene Tripodal Crystal Growth And Raman Scattering Of Rare Earth Orthochromites View Project Hybrid Materials View Project*. <https://www.researchgate.net/publication/276410829>
- Rahayu, A., Lim, L. W., & Takeuchi, T. (2015). Polymer Monolithic Methacrylate Base Modified With Tosylated-Polyethylene Glycol Monomethyl Ether As A Stationary Phase For Capillary Liquid Chromatography. *Talanta*, 134, 232–238. <https://doi.org/10.1016/j.talanta.2014.10.060>
- Rahayu, A., Lim, L. W., & Takeuchi, T. (2015). Preparation Of A Hybrid Monolithic Stationary Phase With Allylsulfonate For The Rapid And Simultaneous Separation Of Cations In Capillary Ion Chromatography. *Journal Of Separation Science*, 38(7), 1109–1116. <https://doi.org/10.1002/jssc.201401264>
- Rodiah, S., Huljana, M., Al Jabbar, J. L., Ichsan, C., & Marzuki, H. (2021). Silica-Rice Husk As Adsorbent Of Cr (Vi) Ions Prepared Through Sol-Gel Method. *Walisongo Journal Of Chemistry*, 4(1), 65–73. <https://doi.org/10.21580/wjc.v4i1.8045>
- Rong, L., Lim, L. W., & Takeuchi, T. (2006). Determination Of Iodide In Seawater Samples By Ion Chromatography With Chemically-Bonded Poly(Ethylene Glycol) Stationary Phase. *Journal Of Chromatography A*, 1128(1–2), 68–72. <https://doi.org/10.1016/j.chroma.2006.06.041>
- Rong, L., Lim, L. W., & Takeuchi, T. (2006b). Determination Of Iodide In Seawater Samples By Ion Chromatography With Chemically-Bonded Poly(Ethylene Glycol) Stationary Phase. *Journal Of Chromatography A*, 1128(1–2), 68–72. <https://doi.org/10.1016/j.chroma.2006.06.041>
- Rong, L., & Takeuchi, T. (2004). Determination Of Iodide In Seawater And Edible Salt By Microcolumn Liquid Chromatography With Poly(Ethylene Glycol) Stationary Phase. *Journal Of Chromatography A*, 1042(1–2), 131–135. <https://doi.org/10.1016/j.chroma.2004.05.032>
- Takeuchi, T., Jiang, B., & Lim, L. W. (2012). Separation Of Inorganic Anions On Hydrophobic Stationary Phases In Ion Chromatography. *Analytical And Bioanalytical Chemistry*, 402(1), 551–555. <https://doi.org/10.1007/s00216-011-5326-3>
- Yusmaniar, Purwanto, A., Putri, E. A., & Rosyidah, D. (2017). Adsorption Of Pb(Ii) Using Silica Gel Composite From Rice Husk Ash Modified 3-Aminopropyltriethoxysilane (Aptes)-Activated Carbon From Coconut Shell. *Aip Conference Proceedings*, 1823. <https://doi.org/10.1063/1.4978107>

Lampiran 4

[EKW] Editor Decision (do not reply to this email) 

 **Muhammad Ridwan Harahap** <jurnal@ar-raniry.ac.id>
to me 

Fri, Dec 16, 2022, 6:11 AM   

Dear Aster Rahayu:

We have reached a decision regarding your submission to Elkawnie: Journal of Islamic Science and Technology, "SYNTHESIS SILICA-PEG BY PHYSICALLY COATING WITH PEG 4000 FOR ABSORPTION OF ION NITRATE".

Our decision is to Revision Required

Best regards

Muhammad Ridwan Harahap
(Scopus ID: 57443545800) Department of Chemistry, Faculty of Science and Technology, Universitas Islam Negeri Ar-Raniry, Banda Aceh
ridwankimia@ar-raniry.ac.id

This is an automated message. Please do not reply to this email.

Elkawnie: Journal of Islamic Science and Technology
<http://jurnal.ar-raniry.ac.id/index.php/elkawnie>

SYNTHESIS SILICA-PEG BY PHYSICALLY COATING WITH PEG 4000 FOR ABSORPTION OF ION NITRATE

Received :

Accepted :

Published :

Abstract: All production activities will eventually produce waste, especially liquid waste. This liquid waste usually empties into rivers and ends up in the sea. One of the substances in liquid waste is nitrate ion (NO_3^-) which in abundance can interfere with water systems and health. Several methods can be used to treat the nitrate contained in the water, such as adsorption. One of its was modified with polymer due to has huge carbon chain. This research was concentrated on optimizing the ability of silica-based using PEG by physically coating since PEG has a long carbon chain that could be transformed into the helix. The adsorbent will be prepared from modified silica gel with PEG 4000 by physical coating in this research. Several parameters will be observed, including the effect of coating time, silica-PEG ratio, and PEG concentration. The performance of silica-PEG to absorb NO_3^- is investigated. Characterization of functional group content in silica-PEG was carried out by Fourier Transform InfraRed (FTIR). The study results show that coating time was 10 minutes with the ratio of silica and PEG 1:5, and the concentration of PEG used was 15%, indicating the optimum performance of silica-PEG when used as a NO_3^- adsorbent. The ability of silica-PEG as a porous material is evidenced by an increase in the absorption capacity of silica-PEG compared to silica gel without the PEG coating process.

Keywords: Adsorption; Nitrates, PEGs; physically coating

Abstrak: Semua kegiatan produksi pada akhirnya akan menghasilkan limbah, terutama limbah cair. Limbah cair biasanya akan bermuara di sungai dan berakhir di laut. Salah satu zat dalam limbah cair adalah ion nitrat (NO_3^-) yang mana dalam jumlah banyak dapat mengganggu sistem perairan dan kesehatan. Beberapa metode dapat digunakan untuk mengolah nitrat yang terkandung dalam air, seperti adsorpsi. Salah satunya dimodifikasi dengan polimer karena memiliki rantai karbon yang besar. Penelitian ini dikonsentrasikan untuk menyelidiki optimalisasi kemampuan silika dengan PEG dengan pelapisan fisik karena PEG memiliki rantai karbon panjang yang dapat bertransformasi menjadi heliks. Dalam penelitian ini, adsorben akan dibuat dari silika gel termodifikasi dengan PEG 4000 dengan pelapisan fisik. Beberapa parameter yang akan diamati antara lain pengaruh waktu pelapisan, rasio silika-PEG, konsentrasi PEG, dan temperatur pelapisan. Kinerja silika-PEG untuk menyerap NO_3^- diselidiki. Karakterisasi kandungan gugus fungsi pada silika-PEG dilakukan dengan Fourier Transform InfraRed (FTIR). Hasil penelitian menunjukkan bahwa waktu pelapisan adalah 10 menit dengan perbandingan silika dan PEG 1:5, dan konsentrasi PEG yang digunakan adalah 15%, menunjukkan kinerja silika-PEG yang optimum bila digunakan sebagai penyerap NO_3^- . Kemampuan silika-PEG sebagai bahan berpori dibuktikan dengan peningkatan kapasitas penyerapan silika-PEG dibandingkan silika gel tanpa proses pelapisan PEG.

Kata kunci: Adsorpsi; Nitrat, PEGs; pelapisan fisik

1. Introduction

Indonesia is one of the industrial countries, contributing to more than 20% of the Indonesian economy. It makes Indonesia the top 10 in the world in the category of manufacturing value-added. Along with the rapid development of industry in Indonesia, it cannot be separated from the problem of environmental pollution, one of which is water pollution (Hamzah, 2021). With increasing industrial growth in Indonesia, it has the potential to negatively impact ecological quality, especially water, due to the imperfect processing of liquid waste produced by an industry. There is reinforced based on data collected from the Indonesian statistical agency in the environmental field, the level of water pollution in Indonesia has increased by 10% in recent years (Luh, 2017). Physical, chemical, and biological parameters become the reference for determining water quality. The physical parameters include the value of turbidity, temperature, color, discharge, Total Dissolved Solid (TDS), and Total Suspended Solid (TSS). The chemical parameters include BOD, COD, DO, pH, nitrate

Commented [m16]: Please make the simple abstract

Commented [m17]: Just state "what you purpose in this research,

The PEG-coated silica has been made through "what method you used" for "what application you perform".

Commented [m18]: State the method you used

Commented [m19]: This sentence contains a lot of gramatical error in verb used.

Commented [m20]: State the result first, how much the absorption capacity obtained, then state the conclusion (good, general or poor).

content, nitrite, phosphate, and heavy metals (Hamzah, 2021). As for biology, the range of microorganisms is contained. The parameter of concern in testing water quality is the nitrite content. Increasing nitrate content in water can result in increased nutrient content in water. These nutrients are beneficial for the survival of aquatic biotas such as algae and bacteria (Deswati et al., 2020). At a specific value limit, the presence of these nutrients will not have an effect, but at a high enough concentration, it will cause changes in function due to the eutrophication process.

One of the efforts to deal with water pollution due to industrial waste in Indonesia can be made with the adsorption method. The use of silica as a nitrate ion adsorbent in wastewater has been widely carried out. The use of silica is based on its properties which have a distinctive surface area and large pores. Several studies have been carried out to obtain silica as an adsorbent, heavy metal with reasonable effectiveness, such as silica to absorb heavy metal waste iron (Fe) (Erdoo et al., 2020), resulting in a decrease in Fe content of more than 0.1 ppm. Silica has also been successfully used as an adsorbent to reduce Pb^{2+} (Naat et al., 2021), Mn^{2+} (Darjito et al., 2019), Cd (Indriyani et al., 2019), Cr^{3+} (Choi, 2018; Rodiah, 2021) Mg^{2+} (Fahmiati et al., 2010) and Cu^{2+} (Fathurrahman, 2020; Naat, 2021), wastewater and nitrate levels in drinking water (Erdoo et al., 2020). Silica, a silicon oxide with a chemical formula (SiO_2), is an oxide that does not have an active group. Several studies reported silica-based optimization for adsorbing heavy metals, such as using the sulfonate functional group (Fahmiati et al., 2010). However, less reported optimizing the potential of silica with polymer, specifically polyethylene glycol (PEG), by physical coating (Onn et al., 2020; Suhono et al., 2019) and chemically (Niizeki et al., 2016). As a polymer, PEG has a primary hydroxyl group at the end of the polyether chain containing oxyethylene. It can form a double helix with intermolecular interactions (Catauro et al., 2018). The functional groups in PEG can provide several other interactions, such as hydrogen bonding and dipole-dipole interactions (Niizeki et al., 2016). This study aims to increase the effectiveness of silica by using a coating method with PEG. The absorption ability of silica PEG coating will be used as an adsorbent for the absorption of nitrate ions (NO_3^-). The ability of silica-PEG will be proven by comparing it with silica gel without going through a coating process on the absorption of nitrate ions.

2. Material And Methods

2.1 Materials

The materials used in this study included silica gel, PEG 4000 (Nacalai Tesque, Kyoto, Japan), $NaNO_3$ (Nacalai Tesque, Kyoto, Japan), Brucine Sulfate (Nacalai Tesque, Kyoto, Japan), Ethanol (Wako 1st Grade), Sulfuric Acid (Wako 1st Grade), NaCl (Nacalai Tesque, Kyoto, Japan) and Aquadest.

2.2 Apparatus

The detection of NO_3^- in terms of concentration, Spectrophotometry UV-Vis (Thermo Scientific-Genesys) was carried out. Furthermore, identifying the functional group in the polymer was carried out using Fourier Transform InfraRed (FTIR) Spectrum 400 Series Perkin Elmer.

2.3 Synthesis of Silica-PEG

Silica gel was modified with PEG and was carried out by weighing 3 grams of PEG 4000, dissolved in 20 ml of 98% ethanol, and then mixed with 5 grams of silica. The coating was carried out with a stirrer for a predetermined time. Then, separated silica with PEG. The performance of Silica-PEG was investigated to absorb NO_3^- using UV-Vis spectrophotometry.

Commented [m21]: What do you mean ? the absorption ability just to decrease 0,1 ppm Fe?

Commented [m22]: There are a several research in PEG-coated silica synthesis which has been published in the journal.

Please state clearly the specific novelty which you can purpose in this research.
The source of the material, or the method use, or even the application maybe.

Commented [m23]: Separating for what ?

Commented [m24]: Please state the method and procedure in NO_3^- absorption.

3. Discussion

3.1 Modification and characterization of Silica-PEG 4000

Modification of silica gel using PEG 4000 through the method of physical coating. It was conducted by observing several factors that affect the silica modification process. It was started by coating the silica gel with PEG 4000, such as the contact time factor between PEG 4000 and silica, the ratio between silica and PEG 4000, the concentration of PEG 4000 used, and a temperature ongoing physical coating. Afterward, the effectiveness of silica-PEG 4000 will be observed. The initial test of the performance of silica-PEG 4000 was by adsorbing the ion 15 ppm of NO_3^- . The coating process lasts only on surface silica. Physically coating occurs based on the Van Der Waals Force Force interface between the silica and PEG surfaces. Silica has site active group silanol (Si-OH) and siloxane (Si-O-Si), a cluster -OH on the surface active site of silica gel with low polarizability. According to (An et al., 2020), PEGylated on the surface of silica microparticles would improve the ability of silica microparticles for controlled pulmonary drug delivery. The presence of polarizability dramatically affects the movement or displacement of electrons on the silica surface. In theory, a vast surface of nano-silica interacts with the polymer chains, thereby reducing the freedom of movement of the PEG 4000 polymer chains (Linda et al., 2021). Visually there is a colour change in the silica gel used, shown in Figure 1.

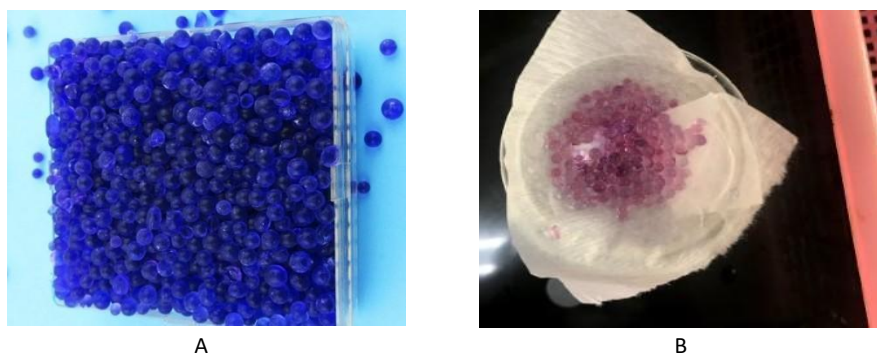


Figure 1. Visual silica gel. A. Silica gel before the coating process with PEG. B. Silica gel after processing coating with PEG.

The silica-PEG was characterized using Fourier Transform Infra-Red (FTIR) to determine and confirm the type of bonding of the organic compound groups formed on Si-PEG 4000. FTIR characterization was carried out using the mid-infrared wavelength range, which is $4000\text{--}400\text{ cm}^{-1}$, as shown in Figure 2. The characteristic peaks of silica-PEG appeared to peak from $3000\text{ to }3700\text{ cm}^{-1}$. Specifically, the broad peak at 3250 cm^{-1} and $1647,21\text{ cm}^{-1}$ were assigned to the -OH stretching vibrations of silica coating PEG (Saravanan et al., 2020). The bonding of silica and PEG was indicated by the dipole-dipole interactions. The ions between the atoms of oxygen from the long chain in PEG and silica coordinated and formed a double helix. Hence acts as an active site of the ion exchange at a wavelength of 3250 cm^{-1} and is identified as an alcohol group (-OH). Thus the wavelength of $1647,27$ was determined as a -OH group attached to silica. The silica itself was detected at 628 cm^{-1} as silica gel. The strong bands at $1076,28\text{ cm}^{-1}$ and $337,54\text{ cm}^{-1}$ were associated to the asymmetric and symmetric Si-O-Si stretching vibration bonding (Shaiful et al., 2014). Furthermore,

Commented [m25]: Which reference you used to claim that this peak refers to -OH vibration.

1215,15 cm^{-1} was detected as C-C bounding from PEG (Tran et al., 2013). The spectrum that appears is adjusted concerning the wavelength of the infrared spectrum, as shown in Table 1.

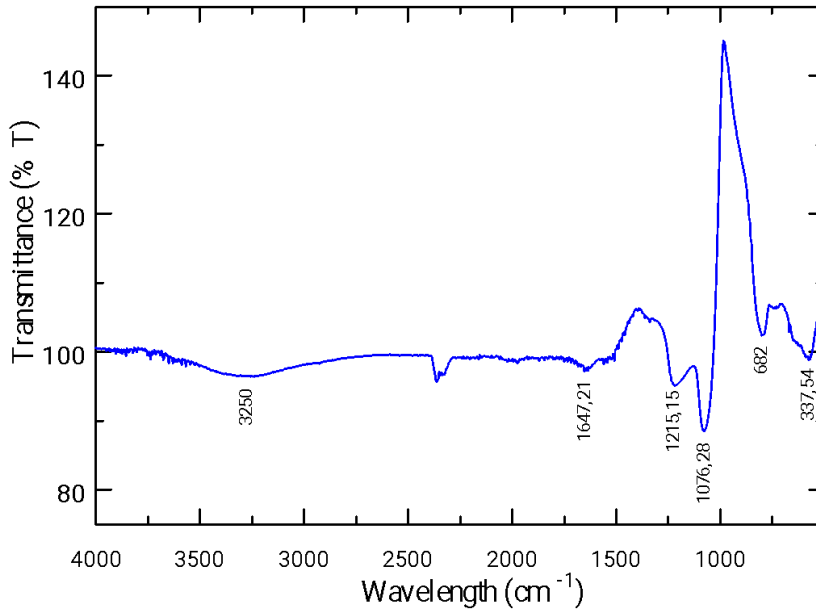


Figure 2. Fourier Transform Infrared (FTIR) spectrum of Si-PEG 4000.

Table 1. Comparison of IR spectrum wavelengths between references with Silica-PEG

Type Bond	Wavelength (cm^{-1})	
	Reference (Saravanan et al., 2020)	Silica-PEG
OH stretching	3000-3700	3250
C-O stretching	1650-1900	1647,27
	1500-800	1215,15 1076,28,
Si-O-Si asym.streaching	1130-800	628,
		337,54

3.2 The effectiveness of Silica-PEG 4000 for nitrate adsorption

Several things affect the silica modification process with PEG as an adsorbent in terms of coating time, silica-PEG ratio and PEG concentration. Each of these parameters affects the performance of silica-PEG in NO_3^- adsorption. The effect of coating time on the effectiveness of silica-PEG was carried out on the adsorption of anions. The anion used is NO_3^- ion with a concentration of 15 ppm. Adsorption was carried out for 10 minutes at room temperature. The adsorption results can be seen in Figure 3. It can be seen that the longer the coating time there was decreased the effectiveness of the silica-PEG, which was indicated by an increase in the removal of nitrate (%). These can be caused by a fall layer of PEG that coats the silica surface due to prolonged contact between silica and PEG. The interaction between silica and PEG for 10 minutes in this coating time parameter shows a better capacity value than the other coating times. Due to weak silanol and siloxane bonds on silica gel, the removal of nitrate increases from 10 minutes with an adsorption capacity, and nitrate removal is 0,22 mg/g and 29,8 %, sequentially. Then the coating time for adsorption of NO_3^- will accrued at 10 minutes. This is in line with research on preparing tetraethyl orthosilicate (TEOS) and polyethylene glycol (PEG). Methanol (CH_3OH) was used as the solvent, and nitric acid (HNO_3) as the catalyst. TEOS was first partially hydrolysed with deionized water, methanol, and PEG for 10 minutes (Suzaimi et al., 2019).

Commented [m26]: How do you get this number ?? there is no clear procedur in this manuscript for this purpose. do you perform thermodynamic or kinetic study?

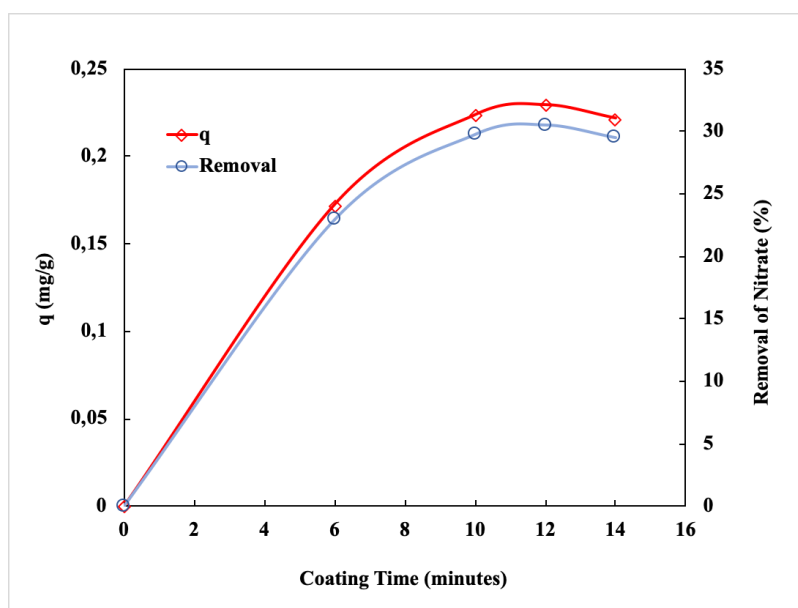


Figure 3. Effect of coating time on silica-PEG in adsorption NO_3^- 15 ppm at room temperature.

Ratio weight between silica and PEG was observed to investigate the heavy influence of silica-PEG's effectiveness. It was conducted with 1:3; 1:5; 1:7; 1:8 (w:w) of variation. Figure 4 shows the effect of the ratio silica-PEG on the adsorption of NO_3^- 15 ppm in a temperature room. There is a difference of approximately 5% between each observed ratio variation. This

matter caused an existing difference in the interaction between PEG and NO_3^- . Increasing the amount of PEG potentially introduces more carbon chains, Carbon chains that could transfer to double helix with dipole-dipole interaction with a silanol. due to this potential, it will improve the ability of silica-PEG to adsorb the nitrate ion. Nitrate ions as anions will be trapped in double helix cavities (Indriyani et al., 2019; Linda et al., 2021). Ratio Optimum coating process silica-PEG is at 1:5 with adsorption capacity and nitrate removal are 0,33 mg/g and 44,2 % sequentially.

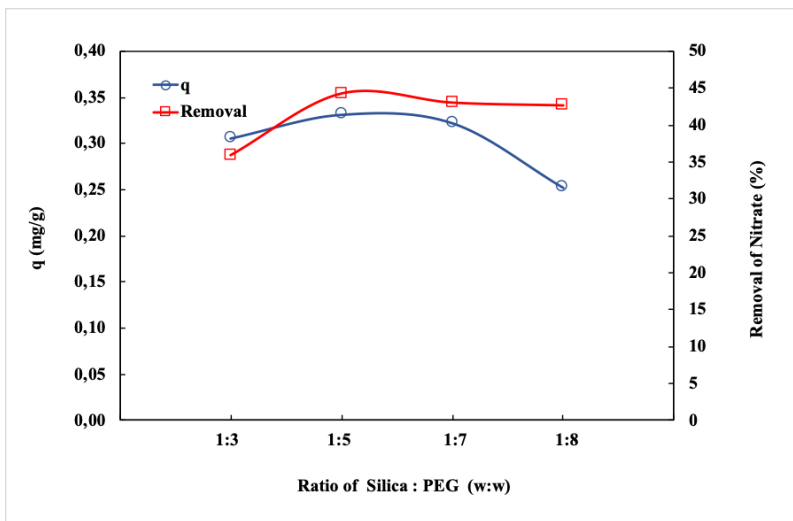


Figure 4. Effect of ratio of silica : PEG on effectiveness silica-PEG in absorption NO_3^- 15 ppm at room temperature.

The effect of variations in the concentration of PEG used in the silica coating process can be seen in Figure 5. It can be seen that there is an actual significant difference using PEG 15% compared to the others. While using 10 % of PEG as started point, it was shown the lowest value of capacity and percentage of nitrate removal: 0,58 mg/g and 78,42 %, sequentially. The high concentration of PEG can accelerate the saturation of the active groups of silica and slow down the adsorption process. Meanwhile, if the concentration is too low, the functional group that acts as the active site in the NO_3^- absorption process will not be maximally located on the silica surface (Ahmadi, 2019; Zhu, 2018). Based on Figure 5, the optimum concentration of PEG is at 15 %, with the capacity value, and percentage removal of nitrate reaching 0,63 mg/g and 84,44 %, sequentially.

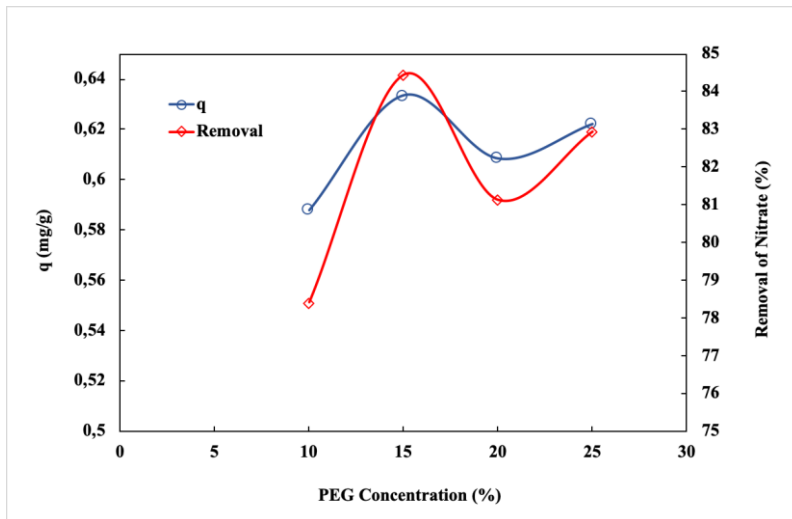


Figure 5. Effect of PEG concentration on effectiveness silica-PEG in adsorption NO_3^- 15 ppm at room temperature.

Elongation at break is the ratio between increased length and initial length after breakage of the tested specimen at a controlled temperature. In general, the combination of ultimate tensile strength and elongation at break can be a good estimation of the toughness of a polymeric material (Ahmadi-Khaneghah et al., 2019). Figure 5 shows the effect of the silica-PEG ratio on nitrate removal. There is a difference in the interaction between PEG and NO_3^- for each variety that affected the percentage of nitrates removal. The amount of PEG has the potential to introduce more carbon chains that can move to the double helix by dipole-dipole interactions with silanols. because of this potential, it will increase the ability of silica-PEG to adsorb nitrate ions. Nitrate ions as anions will be trapped in the cavity of the double helix (Linda et al., 2021; Tran et al., 2013).

3.3 Comparison of the effectiveness of Silica before and after modified with PEG 4000 for nitrate adsorption

Silica has a silanol group that is the potential to introduce and be attached to other functional groups according to the purpose of application. Firstly the carbonyl group from PEG could form a double helix and act as an active site for adsorbing ion nitrate. Since the silica-based could work as an adsorber for nitrate removal, silica-based effectiveness will be observed with and without attaching any PEG groups. Table 2 shows the comparison of capacity value and percentage removal of nitrate. it can be seen that the percentage removal of nitrate significantly improves the adsorbent's performance by almost ten times, from 9,09 % to 84,45 %. In tune with the percentage of removal nitrate, attaching the PEG group to the silica-based surface also improves the capacity value, from 0,07 mg/g to 0,63 mg/g. It could be concluded that modifying using PEG by the physical coating of silica-based improves the performance removal of nitrate.

Table 2. Comparison of Silica with and without attaching PEG groups.

Material	q (mg/g)	Removal of Nitrate (%)
Silica-based	0,07	9,09
Silica-PEG	0,63	84,45

4. Conclusions

Modifying silica with PEG in this study showed an increase in the performance and activity of silica that is seen from the value of anion absorption capacity and percentage of NO₃⁻ removal. The attachment of PEG groups into the surface of silica as an adsorbent improves the performance for nitrate removal almost ten times in terms of capacity value (q) and removal percentage. The optimum condition for the coating process was at 10 minutes of coating time, the ratio of silica:PEG was 1:5, and the concentration of PEG was 15%, achieving 84,44% of nitrate removal. Silica-PEG has the potential to be used as an alternative adsorbent for the absorption of NO₃⁻ ions with the following investigation.

5. Acknowledgments

The author would like to thank the research funding assistance through the Internal Grant with number PD-326/SP3/LPPM-UAD/IV/2021 through the Ahmad Dahlan University Research and Community Service Institute, Yogyakarta. Thank Prof. Toyohide Takeuchi, Prof. Lee Wah Lim, Chemistry and Biomolecular Science, Faculty of Engineering, Gifu University, and Prof. Fuseng Li, River Basin Research Center, Gifu University, Japan, who has facilitated the implementation of this research.

References

- Ahmadi-Khaneghah, A., Omid-Ghallemohamadi, M., & Behniafar, H. (2019). PEG-Based Epoxy And Epoxy/Silica Networks: Thermal, Mechanical, And Thermo-Mechanical Investigations. *International Journal Of Adhesion And Adhesives*, 95. <https://doi.org/10.1016/j.ijadhadh.2019.102430>
- An, J., Forchheimer, D., Sävmarker, J., Brülls, M., & Frenning, G. (2020). Nanoscale Characterization Of Pegylated Phospholipid Coatings Formed By Spray Drying On Silica Microparticles. *Journal Of Colloid And Interface Science*, 577, 92–100. <https://doi.org/10.1016/j.jcis.2020.05.045>
- Catauro, M., Tranquillo, E., Salzillo, A., Capasso, L., Illiano, M., Sapio, L., & Naviglio, S. (2018). Silica/Polyethylene Glycol Hybrid Materials Prepared By A Sol-Gel Method And Containing Chlorogenic Acid. *Molecules*, 23(10). <https://doi.org/10.3390/Molecules23102447>
- Darjito, Khunur, M. M., Purwonugroho, D., Yuliantari, M. A., Sari, Z. R., Suryaningrat, L. H. A. K., & Prananto, Y. P. (2019). Adsorption Of M(II) (M = Mn, Cu, Zn) In Various Ph And

Contact Time Using Chitosan-Silica Prepared By Sol-Gel Method. *Rasayan Journal Of Chemistry*, 12(3), 1485–1492. <https://doi.org/10.31788/RJC.2019.1235220>

- Deswati, D., Yani, E., Safni, S., Norita Tetra, O., & Pardi, H. (2020). Development Methods In Aquaponics Systems Using Biofloc To Improve Water Quality (Ammonia, Nitrite, Nitrate) And Growth Of Tilapia And Samhong Mustard. *International Journal Of Environmental Analytical Chemistry*. <https://doi.org/10.1080/03067319.2020.1839437>
- Erdoo Kukwa, R., Tyoker Kukwa, D., David Oklo, A., Thaddeus Ligom, T., Ishwah, B., & Ajegi Omenka, J. (2020). Adsorption Studies Of Silica Adsorbent Using Rice Husk As A Base Material For Metal Ions Removal From Aqueous Solution. *American Journal Of Chemical Engineering*, 8(2), 48. <https://doi.org/10.11648/J.Ajche.20200802.12>
- Fahmiati, F., Nuryono, N., & Narsito, N. (2010). Adsorption Thermodynamics Of Cd(II), Ni(II), And Mg(II) On 3-Mercapto-1,2,4-Triazole Immobilized Silica Gel. *Indonesian Journal Of Chemistry*, 6(1), 52–55. <https://doi.org/10.22146/Ijc.21773>
- Fathurrahman, M. (2020). Synthesis And Characterization Of Silica Gel From Corn Cob Ash And Its Adsorption Study Toward Cu(II) Metal Ion. *Jurnal Kartika Kimia*, 3(2). <https://doi.org/10.26874/Jkk.V3i2.66>
- Hamza, S. F., El-Sawy, M. M., Alian, N. A., & Shaker, N. O. (2021). Synthesis And Evaluation Of Performance Characteristics Green Composites From Sustainable Fatty Chitosan Graft Copolymer With Acrylic Acid For Wastewater Treatment. *Egyptian Journal Of Chemistry*, 64(10), 6007–6015. <https://doi.org/10.21608/Ejchem.2021.73857.3656>
- Luh Gede Ratna Juliasih, N., Hidayat, D., & Prasetyo Ersya, M. (2017). Penentuan Kadar Nitrit Dan Nitrat Pada Perairan Teluk Lampung Sebagai Indikator Kualitas Lingkungan Perairan. In *Analit: Analytical And Environmental Chemistry* (Vol. 2, Issue 02).
- Indriyani, L. A., Arif, Z., Lindab, R., Purwaningsih, H., Rafi, M., Kimia, A., Matematika, F., Ilmu, D., Alam, P., & Bogor, P. (2019). Jurnal Kimia Sains Dan Aplikasi Journal Of Scientific And Applied Chemistry Pengoptimuman Kondisi Adsorpsi Cd(II) Oleh Adsorben Berbasis Silika Termodifikasi Glisina Menggunakan Central Composite Design. In *Jurnal Kimia Sains Dan Aplikasi* (Vol. 22, Issue 5). <http://ejournal.undip.ac.id/index.php/Ksahttps://doi.org/10.121710/Jksa.22.S.I8a-Iqi>
- Linda, R., Abdullah, Rafi, M., Rahayu, A., Lim, L. W., & Takeuchi, T. (2021). Separation Of Polar Compounds Using Poly(Ethylene Oxide) Bonded Stationary Capillary Liquid Chromatography. *Sains Malaysiana*, 50(11), 3241–3250. <https://doi.org/10.17576/Jsm-2021-5011-08>
- Naat, J. N., Neolaka, Y. A. B., Lapailaka, T., Rachmat Triandi, T., Sabarudin, A., Darmokoesoemo, H., & Kusuma, H. S. (2021). Adsorption Of Cu(II) And Pb(II) Using SilicaMercapto (HsM) Hybrid Adsorbent Synthesized From Silica Of Takari Sand: Optimization Of Parameters And Kinetics. *Rasayan Journal Of Chemistry*, 14(1), 550–560. <https://doi.org/10.31788/RJC.2021.1415803>
- Niizeki, T., Nagayama, S., Hasegawa, Y., Miyata, N., Sahara, M., & Akutsu, K. (2016). Structural Study Of Silica Coating Thin Layers Prepared From Perhydropolysilazane: Substrate

Dependence And Water Penetration Structure. *Coatings*, 6(4), 64. <https://doi.org/10.3390/Coatings6040064>

Onn, S., Hidayatul, N., Kamarudin, N., Azali, N. S., Adira Jaafar, J., Najih Timmiati, S., & Setiabudi, H. D. (2020). Physical Coating Of Mesoporous Silica Nanoparticles With Poly (2-Vinyl Pyridine) And Polyvinylpyrrolidone For The Adsorption And Release Of 5-Fluorouracil. In *Malaysian Journal Of Catalysis* (Vol. 4).

Saravanan, S., Dubey, R. S., Saravanan, S., & Dubey, R. S. (2020). Synthesis Of SiO₂ Nanoparticles By Sol-Gel Method And Their Optical And Structural Properties Fabrication Of Reflectors For Light Management Applications View Project Nanomaterials View Project Synthesis Of SiO₂ Nanoparticles By Sol-Gel Method And Their Optical And Structural Properties. In *Romanian Journal Of Information Science And Technology* (Vol. 23, Issue 1). <https://www.researchgate.net/publication/338828540>

Shaiful Sajab, M., Hua Chia, C., Zakaria, S., & Sillanpää, M. (2014). Removal Of Organic Pollutants. In *Bioresources* (Vol. 9, Issue 3).

Suhono, R. S., Wahyuningtyas, E., & Ismiyati, T. (2019). Silica Coating Application On Heat-Cured Acrylic Resin Plates Towards The Surface Hardness And The Amount Of Residual Monomers. *Padjadjaran Journal Of Dentistry*, 31(2), 123. <https://doi.org/10.24198/Pjd.Vol31no2.19310>

Suzaimi, N. D., Goh, P. S., Malek, N. A. N. N., Lim, J. W., & Ismail, A. F. (2019). Performance Of Branched Polyethyleneimine Grafted Porous Rice Husk Silica In Treating Nitrate-Rich Wastewater Via Adsorption. *Journal Of Environmental Chemical Engineering*, 7(4). <https://doi.org/10.1016/j.jece.2019.103235>

Tran, T. N., Pham, T. V. A., Le, M. L. P., Nguyen, T. P. T., & Tran, V. M. (2013). Synthesis Of Amorphous Silica And Sulfonic Acid Functionalized Silica Used As Reinforced Phase For Polymer Electrolyte Membrane. *Advances In Natural Sciences: Nanoscience And Nanotechnology*, 4(4). <https://doi.org/10.1088/2043-6262/4/4/045007>

Yusmaniar, Purwanto, A., Putri, E. A., & Rosyidah, D. (2017). Adsorption Of Pb(II) Using Silica Gel Composite From Rice Husk Ash Modified 3-Aminopropyltriethoxysilane (Aptes)-Activated Carbon From Coconut Shell. *Aip Conference Proceedings*, 1823. <https://doi.org/10.1063/1.4978107>

Zhu, Y., Chen, L., Zhang, C., & Guan, Z. (2018). Preparation of hydrophobic antireflective SiO₂ coating with deposition of PDMS from water-based SiO₂-PEG sol. *Applied Surface Science*, 457, 522–528. <https://doi.org/10.1016/j.apsusc.2018.06.177>

Lampiran 5

[EKW] Editor Decision (do not reply to this email) Inbox x

M **Muhammad Ridwan Harahap**
to me

Mon, Jan 16, 2:36 PM (9 days ago) ☆ ↶ ⋮

Dear Assc. Prof. Aster Rahayu:

Congratulations

We have reached a decision regarding your submission to Elkawnie. Journal of Islamic Science and Technology, "SYNTHESIS SILICA-PEG BY PHYSICALLY COATING WITH PEG 4000 FOR ABSORPTION OF ION NITRATE".

Our decision is to Accepted Submission

You can already pay the publication fee in accordance with the journal's provisions.

<https://jurnal.ar-raniry.ac.id/index.php/elkawnie/about/submissions#authorFees>

Best regards

Muhammad Ridwan Harahap
(Scopus ID: 57443545800) Department of Chemistry, Faculty of Science and Technology, Universitas Islam Negeri Ar-Raniry, Banda Aceh
ridwankimia@ar-raniry.ac.id

SYNTHESIS OF SILICA-PEG BY PHYSICALLY COATING WITH PEG 4000 FOR ABSORPTION OF ION NITRATE

Aster Rahayu*, Maryudi*, Joni Aldilla Fajri**, Lee Wah Lim***, Nuraini*

*Department of Chemical Engineering, Universitas Ahmad Dahlan, Yogyakarta, Indonesia,
aster.rahayu@che.uad.ac.id, maryudi@che.uad.ac.id, 2207054002@webmail.uad.ac.id

**Department of Environmental Engineering, Universitas Islam Indonesia, Yogyakarta, Indonesia,
joni.af@uii.ac.id

***Department of Biomolecular Science, Gifu University, Gifu, Japan
lim@gifu-u.ac.jp

Email Correspondence: aster.rahayu@che.uad.ac.id

Received : August 8, 2022

Accepted : November 1, 2022

Published : December 31, 2022

Abstract: All production activities will eventually produce waste, especially liquid waste. The nitrate ion (NO_3^-) is one of the substances in liquid waste that can have a significant impact on water systems and human health. Several methods can be used to treat the nitrate contained in the water, such as adsorption, phytoremediation, and wetland treatment. One of its methods was adsorption. The silica was modified with polymer due to its huge carbon chain. This research was focused on optimizing the ability of silica-based materials using PEG by physically coating them since PEG has a long carbon chain that could be transformed into a helix. In this research, the adsorbent will be prepared from modified silica gel with PEG 4000 by physical coating. Several parameters will be observed, including the effect of coating time, silica-PEG ratio, and PEG concentration. The capacity of silica-PEG to absorb NO_3^- is being studied. The characterization of functional group content in silica-PEG was carried out by Fourier Transform Infrared (FTIR). The study results show that the coating time was 10 minutes with the ratio of silica to PEG of 1:5, and the concentration of PEG used was 15%, indicating the optimum performance of silica-PEG when used as an adsorbent, which achieved 84.44 % nitrate removal. An increase in the absorption capacity of silica-PEG demonstrates the ability of silica-PEG as a porous material. It was compared to silica gel without the PEG coating process, which was 9.09% to 84.44%.

Keywords: Adsorption; Nitrates; PEGs; physically coating.

Abstrak: Semua kegiatan produksi pada akhirnya akan menghasilkan limbah, terutama limbah cair. Limbah cair biasanya akan bermuara di sungai dan berakhir di laut. Salah satu zat dalam limbah cair adalah ion nitrat (NO_3^-) yang mana dalam jumlah banyak dapat mengganggu sistem perairan dan kesehatan. Beberapa metode dapat digunakan untuk mengolah nitrat yang terkandung dalam air, seperti adsorpsi. Salah satunya dimodifikasi dengan polimer karena memiliki rantai karbon yang besar. Penelitian ini dikonsentrasikan untuk menyelidiki optimalisasi kemampuan silika dengan PEG dengan pelapisan fisik karena PEG memiliki rantai karbon panjang yang dapat bertransformasi menjadi heliks. Dalam penelitian ini, adsorben akan dibuat dari silika gel termodifikasi dengan PEG 4000 dengan pelapisan fisik. Beberapa parameter yang akan diamati antara lain pengaruh waktu pelapisan, rasio silika-PEG, konsentrasi PEG, dan temperatur pelapisan. Kinerja silika-PEG untuk menyerap NO_3^- diselidiki.

Karakterisasi kandungan gugus fungsi pada silika-PEG dilakukan dengan Fourier Transform InfraRed (FTIR). Hasil penelitian menunjukkan bahwa waktu pelapisan adalah 10 menit dengan perbandingan silika dan PEG 1:5, dan konsentrasi PEG yang digunakan adalah 15%, menunjukkan kinerja silika-PEG yang optimum bila digunakan sebagai penyerap NO_3^- sebesar 84,44%. Kemampuan silika-PEG sebagai bahan berpori dibuktikan dengan peningkatan kapasitas penyerapan silika-PEG dibandingkan silika gel tanpa proses pelapisan PEG yaitu 9,09% menjadi 84,44%.

Kata kunci: Adsorpsi; Nitrat; PEGs; pelapisan fisik.

Recommended APA Citation :

Rahayu, A., Maryudi, Fajri, J. A., Lim, L. W., & Nuraini. (2023). Synthesis of Silica-PEG By Physically Coating With PEG 4000 For Absorption of Ion Nitrate. *Elkawnie*, 8(2), 42-53. <https://doi.org/10.22373/ekw.v8i2.14680>

Introduction

Indonesia is one of the industrial countries, contributing to more than 20% of the Indonesian economy. It makes Indonesia the top 10 in the world in the category of manufacturing value-added. The rapid development of industry in Indonesia, cannot be separated from the problem of environmental pollution, one of which is water pollution (Hamzah, 2021). With increasing industrial growth in Indonesia, it has the potential to negatively impact ecological quality, especially water, due to the imperfect processing of liquid waste produced by an industry. There is reinforced based on data collected from the Indonesian statistical agency in the environmental field, the level of water pollution in Indonesia has increased by 10% in recent years (Luh, 2017). Physical, chemical, and biological parameters become the reference for determining water quality. The physical parameters include the value of turbidity, temperature, color, discharge, Total Dissolved Solid (TDS), and Total Suspended Solid (TSS). The chemical parameters include BOD, COD, DO, pH, nitrate content, nitrite, phosphate, and heavy metals (Hamzah, 2021). As for biology, the range of microorganisms is contained. The parameter of concern in testing water quality is the nitrite content. Increasing nitrate content in water can result in increased nutrient content in water. These nutrients are beneficial for the survival of aquatic biotas such as algae and bacteria (Deswati et al., 2020). At a specific value limit, the presence of these nutrients will not have an effect, but at a high enough concentration, it will cause changes in function due to the eutrophication process.

One of the efforts to deal with water pollution due to industrial waste in Indonesia can be made with the adsorption method. The use of silica as a nitrate ion adsorbent in wastewater has been widely carried out. The use of silica is based on its properties which have a distinctive surface area and large pores. Several studies have been carried out to obtain silica as an adsorbent, heavy metal with reasonable effectiveness, such as silica to absorb heavy metal waste iron (Fe) (Kukwa et al., 2020), the maximum percentage removal of metal ions reached 99.48%. Silica has also been successfully used as an adsorbent to reduce Pb^{2+}

(Naat et al., 2021), Mn^{2+} (Darjito et al., 2019), Cd (Indriyani et al., 2019), Cr^{3+} (Choi, 2018; Rodiah, 2021), Mg^{2+} (Fahmiati et al., 2010) and Cu^{2+} (Fathurrahman, 2020; Naat, 2021), wastewater and nitrate levels in drinking water (Erdoo et al., 2020). Silica, a silicon oxide with a chemical formula (SiO_2), is an oxide that does not have an active group. Several studies reported silica-based optimization for adsorbing heavy metals, such as using the sulfonate functional group (Fahmiati et al., 2010). However, less reported optimizing the potential of silica with polymer, specifically polyethylene glycol (PEG), by physical coating (Onn et al., 2020; Suhono et al., 2019) and chemically (Niizeki et al., 2016). As a polymer, PEG has a primary hydroxyl group at the end of the polyether chain containing oxyethylene. It can form a double helix with intermolecular interactions (Catauro et al., 2018). The functional groups in PEG can provide several other interactions, such as hydrogen bonding and dipole-dipole interactions (Niizeki et al., 2016). This study aims to increase the effectiveness of the silica-based by using a physically coating method with PEG in a single and simple step. The absorption ability of silica PEG coating will be used as an adsorbent for the absorption of nitrate ions (NO_3^-). The ability of silica-PEG will be proven by comparing it with silica gel without going through a coating process for the absorption of nitrate ions.

Material And Methods

Materials

The materials used in this study included silica gel, PEG 4000 (Nacalai Tesque, Kyoto, Japan), $NaNO_3$ (Nacalai Tesque, Kyoto, Japan), Brucine Sulfate (Nacalai Tesque, Kyoto, Japan), Ethanol (Wako 1st Grade), Sulfuric Acid (Wako 1st Grade), NaCl (Nacalai Tesque, Kyoto, Japan) and Aquadest.

Apparatus

The detection of NO_3^- in terms of concentration, Spectrophotometry UV-Vis (Thermo Scientific-Genesys) was carried out. Furthermore, identifying the functional group in the polymer was carried out using Fourier Transform InfraRed (FTIR) Spectrum 400 Series Perkin Elmer.

Synthesis of Silica-PEG

Silica gel was modified with PEG and was carried out by weighing 3 grams of PEG 4000, dissolved in 20 ml of 98% ethanol, and then mixed with 5 grams of silica. The coating was carried out with a stirrer for a predetermined time. Then, the separated silica with PEG for removing the residual solution. The performance of Silica-PEG was investigated to absorb NO_3^- using UV-Vis spectrophotometry based on Standard Methods for the Examination of Water and Waste Water Indonesia (SNI 06-6989.9-2004).

Discussion

Modification and characterization of Silica-PEG 4000

Modification of silica gel using PEG 4000 through the method of physical coating. It was conducted by observing several factors that affect the silica modification process. It was started by coating the silica gel with PEG 4000, such as the contact time factor between PEG 4000 and silica, the ratio between silica and PEG 4000, the concentration of PEG 4000 used, and a temperature ongoing physical coating. Afterwards, the effectiveness of silica-PEG 4000 will be observed. The initial test of the performance of silica-PEG 4000 was by adsorbing the ion 15 ppm of NO_3^- . The coating process lasts only on surface silica. Physically coating occurs based on the Van Der Waals Force interface between the silica and PEG surfaces. Silica has site active group silanol (Si-OH) and siloxane (Si-O-Si), a cluster -OH on the surface active site of silica gel with low polarizability. According to (An et al., 2020), PEGylated on the surface of silica microparticles would improve the ability of silica microparticles for controlled pulmonary drug delivery. The presence of polarizability dramatically affects the movement or displacement of electrons on the silica surface. In theory, a vast surface of nano-silica interacts with the polymer chains, thereby reducing the freedom of movement of the PEG 4000 polymer chains (Linda et al., 2021). Visually there is a colour change in the silica gel used, shown in Figure 1.

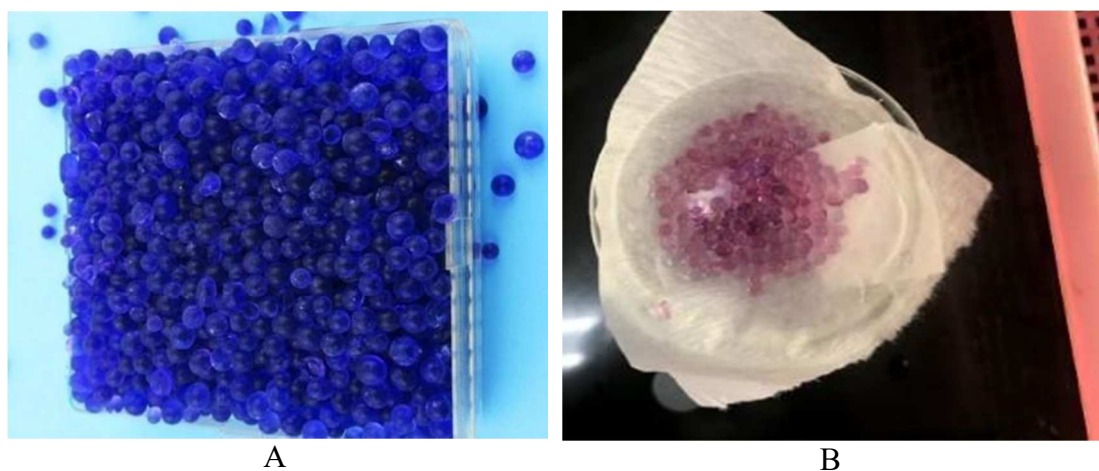


Figure 1. Visual silica gel. A. Silica gel before the coating process with PEG. B. Silica gel after processing coating with PEG.

The silica-PEG was characterized using Fourier Transform Infra-Red (FTIR) to determine and confirm the type of bonding of the organic compound groups formed on Si-PEG 4000. FTIR characterization was carried out using the mid-infrared wavelength range, which is $4000\text{-}400\text{ cm}^{-1}$, as shown in Figure 2. The characteristic peaks of silica-based (Si-OH) just consist of Si-O-Si stretching that indicated around $1130\text{-}800\text{ cm}^{-1}$. Besides that, silica-PEG appeared to peak from $3000\text{ to }3700\text{ cm}^{-1}$. Specifically, the broad peak at 3250 cm^{-1} and 1647.21 cm^{-1} were assigned to the -OH stretching vibrations of silica coating PEG (Saravanan et al., 2020). The bounding of silica and PEG was indicated by the

dipole-dipole interactions (Linda et al., 2021). The ions between the atoms of oxygen from the long chain in PEG and silica coordinated and formed a double helix. Hence acts as an active site of the ion exchange at a wavelength of 3250 cm^{-1} and is identified as an alcohol group (-OH). Thus the wavelength of 1647.27 was determined as a -OH group attached to silica. The silica itself was detected at 628 cm^{-1} as silica gel. The strong bands at $1076,28\text{ cm}^{-1}$ and 337.54 cm^{-1} were associated with the asymmetric and symmetric Si-O-Si stretching vibration bonding (Shaiful et al., 2014). Furthermore, the wavelength of 1647.27 was determined as C=C bonding and 1215.15 cm^{-1} was detected as C-C bonding from PEG (Tran et al., 2013). The spectrum that appears is adjusted concerning the wavelength of the infrared spectrum, as shown in Table 1

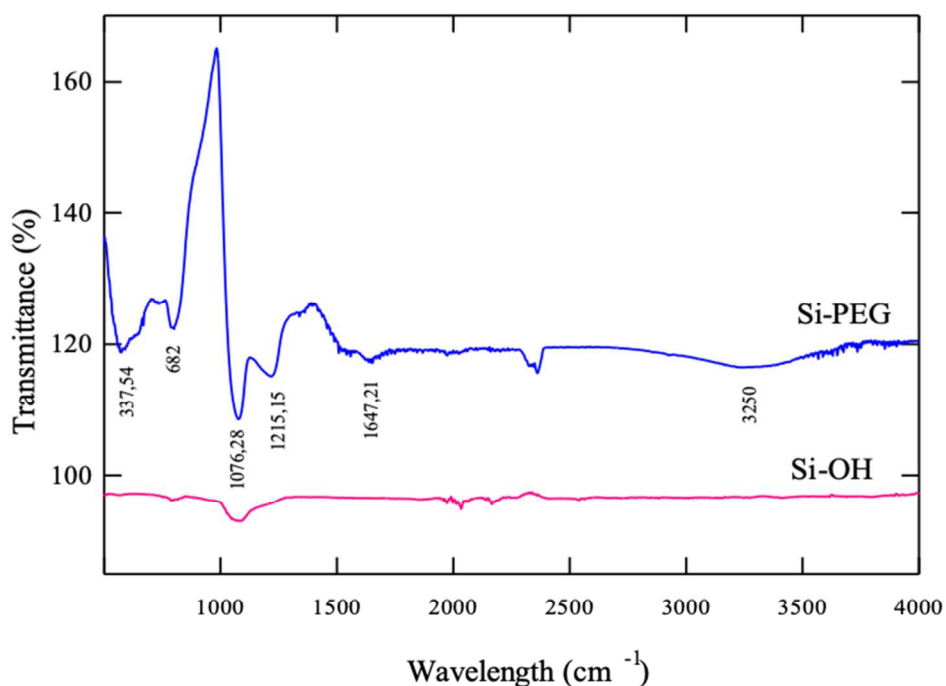


Figure 2. Fourier Transform Infrared (FTIR) spectrum of Si-PEG 4000.

Table 1. Comparison of IR spectrum wavelengths between references with Silica-PEG

Type Bond	Wavelength (cm^{-1})	
	Reference (Saravanan et al., 2020)	Silica-PEG
O-H stretching	3000-3700	3250
C-C stretching	1500-800	1215.15
C=C stretching	1650-1900	1647.27
Si-O-Si asym.stretching	1130-800	1076.28; 628; 337.54

The effectiveness of Silica-PEG 4000 for nitrate adsorption

Several things affect the silica modification process with PEG as an adsorbent in terms of coating time, silica-PEG ratio and PEG concentration. Each of these parameters affects the performance of silica-PEG in NO_3^- absorption. The effect of coating time on the effectiveness of silica-PEG was carried out on the absorption of anions. The anion used is NO_3^- ion with a concentration of 15 ppm. Absorption was carried out for 10 minutes at room temperature. The absorption results can be seen in Figure 3. It can be seen that the longer the coating time there was decreased the effectiveness of the silica-PEG, which was indicated by an increase in the removal of nitrate (%). These can be caused by a fall layer of PEG that coats the silica surface due to prolonged contact between silica and PEG. The interaction between silica and PEG for 10 minutes in this coating time parameter shows a better capacity value than the other coating times. Due to weak silanol and siloxane bonds on silica gel, the removal of nitrate increases from 10 minutes with an adsorption capacity, and nitrate removal is 0.22 mg/g and 29.8 %, sequentially. Then the coating time for adsorption of NO_3^- will be accrued at 10 minutes. This is in line with research on preparing tetraethyl orthosilicate (TEOS) and polyethylene glycol (PEG). Methanol (CH_3OH) was used as the solvent and nitric acid (HNO_3) as the catalyst. TEOS was first partially hydrolysed with deionized water, methanol, and PEG for 10 minutes (Suzaimi et al., 2019).

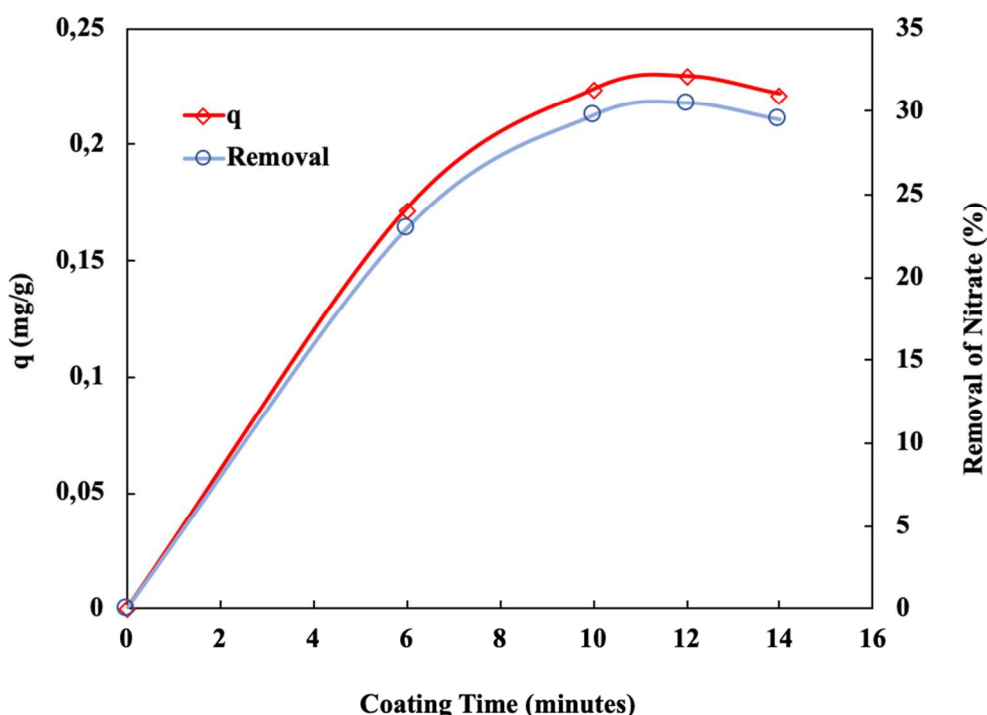


Figure 3. Effect of coating time on silica-PEG in absorption NO_3^- 15 ppm at room temperature.

The ratio weight between silica and PEG was observed to investigate the heavy influence of silica-PEG's effectiveness. It was conducted with 1:3; 1:5; 1:7; 1:8 (w:w) of variation. Figure 4 shows the effect of the ratio silica-PEG on the absorption of NO_3^- 15 ppm in a temperature room. There is a difference of approximately 5% between each observed ratio variation. This matter caused an existing difference in the interaction between PEG and NO_3^- . Increasing the amount of PEG potentially introduces more carbon chains, Carbon chains that could transfer to double helix with dipole-dipole interaction with a silanol. due to this potential, it will improve the ability of silica-PEG to adsorb the nitrate ion. Nitrate ions as anions will be trapped in double helix cavities (Indriyani et al., 2019; Linda et al., 2021). The ratio Optimum coating process silica-PEG is at 1:5 with adsorption capacity, and nitrate removal is 0.33 mg/g and 44.2 % sequentially.

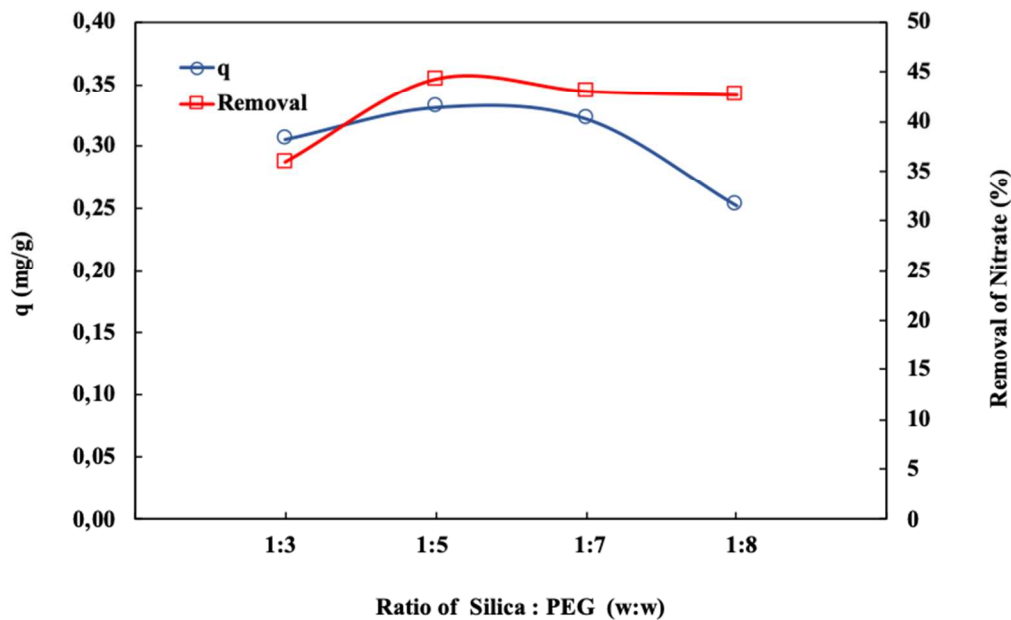


Figure 4. Effect of ratio of silica: PEG on effectiveness silica-PEG in absorption NO_3^- 15 ppm at room temperature

The effect of variations in the concentration of PEG used in the silica coating process can be seen in Figure 5. It can be seen that there is an actual significant difference using PEG 15% compared to the others. While using 10 % of PEG as started point, it was shown the lowest value of capacity and percentage of nitrate removal: 0.58 mg/g and 78.42 %, sequentially. The high concentration of PEG can accelerate the saturation of the active groups of silica and slow down the adsorption process. Meanwhile, if the concentration is too low, the functional group that acts as the active site in the NO_3^- absorption process will not be

maximally located on the silica surface (Ahmadi, 2019; Zhu, 2018). Based on Figure 5, the optimum concentration of PEG is at 15 %, with the capacity value and percentage removal of nitrate reaching 0.63 mg/g and 84.44 %, sequentially.

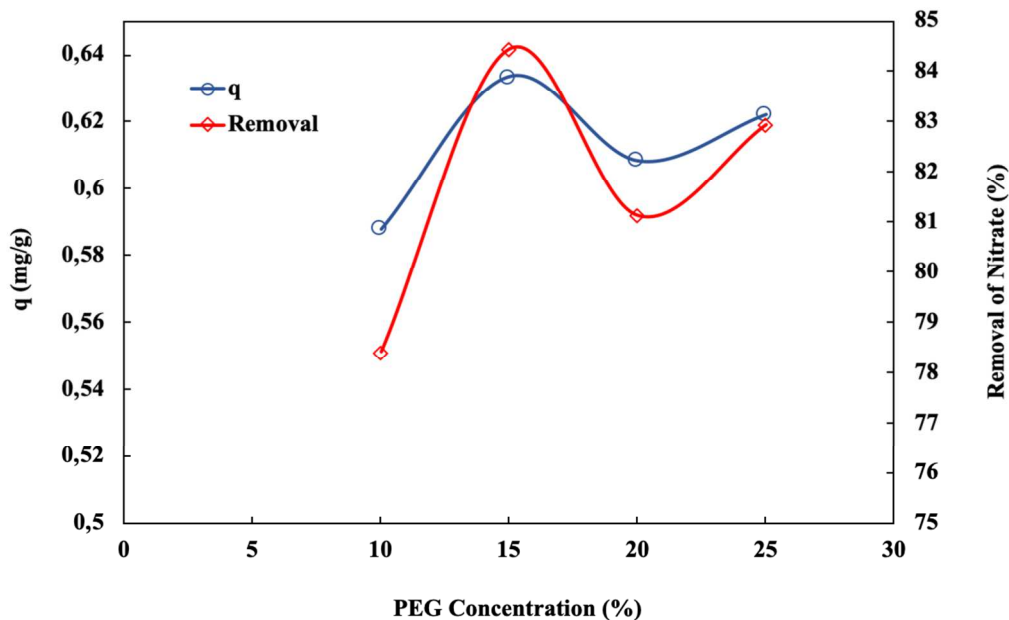


Figure 5. Effect of PEG concentration on effectiveness silica-PEG in absorption NO_3^- 15 ppm at room temperature.

Elongation at break is the ratio between increased length and initial length after breakage of the tested specimen at a controlled temperature. In general, the combination of ultimate tensile strength and elongation at break can be a good estimation of the toughness of a polymeric material (Ahmadi-Khaneghah et al., 2019). Figure 5 shows the effect of the silica-PEG ratio on nitrate removal. There is a difference in the interaction between PEG and NO_3^- for each variety that affected the percentage of nitrates removal. The amount of PEG has the potential to introduce more carbon chains that can move to the double helix by dipole-dipole interactions with silanols. because of this potential, it will increase the ability of silica-PEG to adsorb nitrate ions. Nitrate ions as anions will be trapped in the cavity of the double helix (Linda et al., 2021; Tran et al., 2013).

Comparison of the effectiveness of Silica before and after modification with PEG 4000 for nitrate adsorption

Silica has a silanol group that is the potential to introduce and be attached to other functional groups according to the purpose of application. Firstly the carbonyl group from PEG could form a double helix and act as an active site for adsorbing ion nitrate. Since the silica-based could work as an absorber for nitrate removal, silica-based effectiveness will be observed with and without attaching any PEG groups. Table 2 shows the comparison of capacity value and percentage

removal of nitrate. it can be seen that the percentage removal of nitrate significantly improves the adsorbent's performance by almost ten times, from 9.09 % to 84.45 %. In tune with the percentage of removal nitrate, attaching the PEG group to the silica-based surface also improves the capacity value from 0.07 mg/g to 0.63 mg/g. It could be concluded that modifying using PEG by the physical coating of silica-based improves the performance removal of nitrate.

Table 2. Comparison of Silica with and without attaching PEG groups.

Material	Q (mg/g)	Removal of Nitrate (%)
Silica-based	0.07	9.09
Silica-PEG	0.63	84.45

Conclusions

Modifying silica with PEG in this study showed an increase in the performance and activity of silica that is seen from the value of anion absorption capacity and percentage of NO_3^- removal. the attachment of PEG groups into the surface of silica as an adsorbent improves the performance for nitrate removal almost ten times in terms of capacity value (q) and removal percentage. The optimum condition for the coating process was at 10 minutes of coating time, the ratio of silica: PEG was 1:5, and the concentration of PEG was 15%, achieving 84.44% of nitrate removal. Silica-PEG has the potential to be used as an alternative adsorbent for the absorption of NO_3^- ions and optimizing the removal of NO_3^- from the outlet of secondary treatment with the following investigation.

Acknowledgements

The author would like to thank the research funding assistance through the Internal Grant with number PD-326/SP3/LPPM-UAD/IV/2021 through the Ahmad Dahlan University Research and Community Service Institute, Yogyakarta. Thanks Prof. Toyohide Takeuchi, Prof. Lee Wah Lim, Chemistry and Biomolecular Science, Faculty of Engineering, Gifu University, and Prof. Fuseng Li, River Basin Research Center, Gifu University, Japan, who has facilitated the implementation of this research. Thanks to Nafira Alfi Zaini Amrillah, Toby Kurniawan, Muhammad Fariq Fajar, Afifah Fika Purnama Putri and Anggi Safitri for the excellent teamwork.

References

Ahmadi-Khaneghah, A., Omid-Ghallemohamadi, M., & Behniafar, H. (2019). PEG-Based Epoxy And Epoxy/Silica Networks: Thermal, Mechanical, And Thermo-Mechanical Investigations. *International Journal Of*

- Adhesion And Adhesives*, 95.
<https://doi.org/10.1016/j.ijadhadh.2019.102430>
- An, J., Forchheimer, D., Sävmarker, J., Brülls, M., & Frenning, G. (2020). Nanoscale Characterization Of Pegylated Phospholipid Coatings Formed By Spray Drying On Silica Microparticles. *Journal Of Colloid And Interface Science*, 577, 92–100.
<https://doi.org/10.1016/j.jcis.2020.05.045>
- Catauro, M., Tranquillo, E., Salzillo, A., Capasso, L., Illiano, M., Sapio, L., & Naviglio, S. (2018). Silica/Polyethylene Glycol Hybrid Materials Prepared By A Sol-Gel Method And Containing Chlorogenic Acid. *Molecules*, 23(10). <https://doi.org/10.3390/Molecules23102447>
- Darjito, Khunur, M. M., Purwonugroho, D., Yuliantari, M. A., Sari, Z. R., Suryaningrat, L. H. A. K., & Prananto, Y. P. (2019). Adsorption Of M(II) (M = Mn, Cu, Zn) In Various Ph And Contact Time Using Chitosan-Silica Prepared By Sol-Gel Method. *Rasayan Journal Of Chemistry*, 12(3), 1485–1492. <https://doi.org/10.31788/RJC.2019.1235220>
- Deswati, D., Yani, E., Safni, S., Norita Tetra, O., & Pardi, H. (2020). Development Methods In Aquaponics Systems Using Biofloc To Improve Water Quality (Ammonia, Nitrite, Nitrate) And Growth Of Tilapia And Samhong Mustard. *International Journal Of Environmental Analytical Chemistry*. <https://doi.org/10.1080/03067319.2020.1839437>
- Fahmiati, F., Nuryono, N., & Narsito, N. (2010). Adsorption Thermodynamics Of Cd(Ii), Ni(Ii), And Mg(Ii) On 3-Mercapto-1,2,4-Triazole Immobilized Silica Gel. *Indonesian Journal Of Chemistry*, 6(1), 52–55.
<https://doi.org/10.22146/ijc.21773>
- Fathurrahman, M. (2020). Synthesis And Characterization Of Silica Gel From Corn Cob Ash And Its Adsorption Study Toward Cu(Ii) Metal Ion. *Jurnal Kartika Kimia*, 3(2). <https://doi.org/10.26874/jkk.v3i2.66>
- Hamza, S. F., El-Sawy, M. M., Alian, N. A., & Shaker, N. O. (2021). Synthesis And Evaluation Of Performance Characteristics Green Composites From Sustainable Fatty Chitosan Graft Copolymer With Acrylic Acid For Wastewater Treatment. *Egyptian Journal Of Chemistry*, 64(10), 6007–6015. <https://doi.org/10.21608/Ejchem.2021.73857.3656>
- Luh Gede Ratna Juliasih, N., Hidayat, D., & Prasetio Ersas, M. (2017). Penentuan Kadar Nitrit Dan Nitrat Pada Perairan Teluk Lampung Sebagai Indikator Kualitas Lingkungan Perairan. In *Analit: Analytical And Environmental Chemistry* (Vol. 2, Issue 02).
- Indriyani, L. A., Arif, Z., Lindab, R., Purwaningsih, H., Rafi, M., (2019). Pengoptimuman Kondisi Adsorpsi Cd(II) Oleh Adsorben Berbasis Silika Termodifikasi Glisina Menggunakan Central Composite Design. In *Jurnal Kimia Sains Dan Aplikasi* (Vol. 22, Issue 5). <https://doi.org/10.14710/jksa.22.5.184-191>

- Linda, R., Abdullah, Rafi, M., Rahayu, A., Lim, L. W., & Takeuchi, T. (2021). Separation Of Polar Compounds Using Poly(Ethylene Oxide) Bonded Stationary Capillary Liquid Chromatography. *Sains Malaysiana*, 50(11), 3241–3250. <https://doi.org/10.17576/Jsm-2021-5011-08>
- Kukwa, R., Tyoker Kukwa, D., David Oklo, A., Thaddeus Ligom, T., Ishwah, B., & Ajegi Omenka, J. (2020). Adsorption Studies Of Silica Adsorbent Using Rice Husk As A Base Material For Metal Ions Removal From Aqueous Solution. *American Journal Of Chemical Engineering*, 8(2), 48. <https://doi.org/10.11648/J.Ajche.20200802.12>
- Naat, J. N., Neolaka, Y. A. B., Lapailaka, T., Rachmat Triandi, T., Sabarudin, A., Darmokoesoemo, H., & Kusuma, H. S. (2021). Adsorption Of Cu(II) And Pb(II) Using Silica Mercapto (HsM) Hybrid Adsorbent Synthesized From Silica Of Takari Sand: Optimization Of Parameters And Kinetics. *Rasayan Journal Of Chemistry*, 14(1), 550–560. <https://doi.org/10.31788/RJC.2021.1415803>
- Niizeki, T., Nagayama, S., Hasegawa, Y., Miyata, N., Sahara, M., & Akutsu, K. (2016). Structural Study Of Silica Coating Thin Layers Prepared From Perhydropolysilazane: Substrate Dependence And Water Penetration Structure. *Coatings*, 6(4), 64. <https://doi.org/10.3390/Coatings6040064>
- Onn, S., Hidayatul, N., Kamarudin, N., Azali, N. S., Adira Jaafar, J., Najiha Timmiati, S., & Setiabudi, H. D. (2020). Physical Coating Of Mesoporous Silica Nanoparticles With Poly (2-Vinyl Pyridine) And Polyvinylpyrrolidone For The Adsorption And Release Of 5-Fluorouracil. In *Malaysian Journal Of Catalysis* (Vol. 4).
- Saravanan, S., Dubey, R. S., Saravanan, S., & Dubey, R. S. (2020). Synthesis Of Sio₂ Nanoparticles By Sol-Gel Method And Their Optical And Structural Properties Fabrication Of Reflectors For Light Management Applications View Project Nanomaterials View Project Synthesis Of Sio₂ Nanoparticles By Sol-Gel Method And Their Optical And Structural Properties. In *Romanian Journal Of Information Science And Technology* (Vol. 23, Issue 1). <https://www.researchgate.net/publication/338828540>
- Shaiful Sajab, M., Hua Chia, C., Zakaria, S., & Sillanpää, M. (2014). Removal Of Organic Pollutants. In *Bioresources* (Vol. 9, Issue 3).
- Suhono, R. S., Wahyuningtyas, E., & Ismiyati, T. (2019). Silica Coating Application On Heat-Cured Acrylic Resin Plates Towards The Surface Hardness And The Amount Of Residual Monomers. *Padjadjaran Journal Of Dentistry*, 31(2), 123. <https://doi.org/10.24198/Pjd.Vol31No2.19310>
- Suzaimi, N. D., Goh, P. S., Malek, N. A. N. N., Lim, J. W., & Ismail, A. F. (2019). Performance Of Branched Polyethyleneimine Grafted Porous Rice Husk Silica In Treating Nitrate-Rich Wastewater Via Adsorption. *Journal Of Environmental Chemical Engineering*, 7(4). <https://doi.org/10.1016/J.Jece.2019.103235>

- Tran, T. N., Pham, T. V. A., Le, M. L. P., Nguyen, T. P. T., & Tran, V. M. (2013). Synthesis Of Amorphous Silica And Sulfonic Acid Functionalized Silica Used As Reinforced Phase For Polymer Electrolyte Membrane. *Advances In Natural Sciences: Nanoscience And Nanotechnology*, 4(4). <https://doi.org/10.1088/2043-6262/4/4/045007>
- Yusmaniar, Purwanto, A., Putri, E. A., & Rosyidah, D. (2017). Adsorption Of Pb(Ii) Using Silica Gel Composite From Rice Husk Ash Modified 3-Aminopropyltriethoxysilane (Aptes)-Activated Carbon From Coconut Shell. *Aip Conference Proceedings*, 1823. <https://doi.org/10.1063/1.4978107>
- Zhu, Y., Chen, L., Zhang, C., & Guan, Z. (2018). Preparation of hydrophobic antireflective SiO₂ coating with deposition of PDMS from water-based SiO₂-PEG sol. *Applied Surface Science*, 457, 522–528. <https://doi.org/10.1016/j.apsusc.2018.06.177>