

Journals

Books

Engineering Research

- Advanced Engineering Forum >
- Applied Mechanics and Materials >
- Engineering Innovations >
- Journal of Biomimetics, Biomaterials and Biomedical Engineering >
- International Journal of Engineering Research in Africa >

Materials Science

- Advanced Materials Research >
- Defect and Diffusion Forum >
- Diffusion Foundations and Materials Applications >
- Journal of Metastable and Nanocrystalline Materials >
- Journal of Nano Research >
- Key Engineering Materials <**
- Materials Science Forum >
- Nano Hybrids and Composites >
- Solid State Phenomena >

Engineering Series

- Advances in Science and Technology >
- Construction Technologies and Architecture >

Special Book Collections

- Foundations of Materials Science and Engineering >
- Scientific Books Collection >
- Specialized Collections >
- Retrospective Collection >

Newsletter Subscription

First Name *

Last Name *

Email *

SUBSCRIBE

Subscribe to our Newsletter and get informed about new publication regularly and **special discounts for subscribers!**

Home » [Key Engineering Materials](#) » Details




Key Engineering Materials - Details

ISSN: 1662-9795

Details

Volumes

Editorial Board

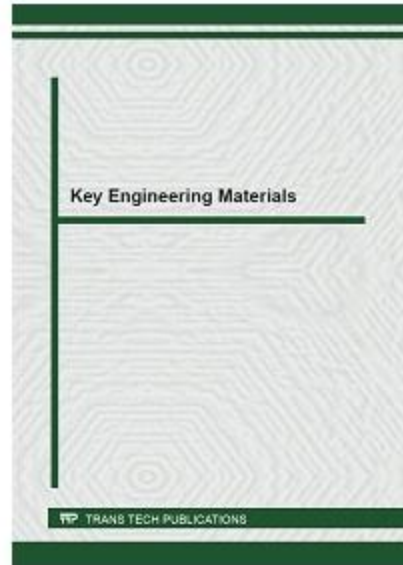

About:

Key Engineering Materials is a peer-reviewed periodical which covers entire range of basic and applied aspects of the synthesis and research, modelling, processing and application of advanced engineering materials. "Key Engineering Materials" is one of the largest periodicals in its field.

"Key Engineering Materials" specializes in the publication of thematically complete volumes and complete special topic volumes. Periodical considers stand-alone papers by individual authors. Authors retain the right to publish an extended and significantly updated version in another periodical.

SUBMIT PAPER

All published materials are archived with [PORTICO](#) and [CLOCKSS](#).

RECENT VOLUME

Abstracted/Indexed in:
 SCOPUS www.scopus.com.
 REAXYS www.reaxys.com.

- Ei Compendex www.ei.org/.
- Inspec (IET, Institution of Engineering Technology) www.theiet.org.
- Chemical Abstracts Service (CAS) www.cas.org.
- Google Scholar scholar.google.com.
- GeoRef www.americangeosciences.org/georef.
- INIS Atomindex (International Nuclear Information System) <https://inis.iaea.org>.
- Cambridge Scientific Abstracts (CSA) www.csa.com.
- ProQuest www.proquest.com.
- Ulrichsweb www.proquest.com/products-services/Ulrichsweb.html.
- EBSCOhost Research Databases www.ebscohost.com/.
- Zetoc zetoc.jisc.ac.uk.
- EVISA <http://www.speciation.net/Public/Linklists/EVISA.html>.
- Index Copernicus Journals Master List www.indexcopernicus.com.
- WorldCat (OCLC) www.worldcat.org.

ISSN print 1013-9826 ISSN cd 1662-9809 ISSN web 1662-9795

Additional Information:

Please ask for additional information: kem@scientific.net
 34 volumes per year

Subscription

WEB ACCESS 2023: Volumes 939 - 972 (34 Vols.)
 Access January - December 2023

The Journal published as of 1982 - 2022: 938 Vols.

Online Subscription Price 2023: EUR 2'875 / US\$ 3'130 (Option 1)

Online Subscription Price 2023 with access only to all Back Volumes: EUR 4'110 / USD 4'505 (Option 2)

Back Files purchase (perpetual access) on request (Option 3)

Benefits to libraries: • Outright purchase • Perpetual access rights • Multiple concurrent users • Long-time preservation • COUNTER-compliant usage statistics • Pick & Choose licensing options as well as package options. • 24/7 access on www.scientific.net • Freedom to use offline or print • Advanced search options



Please contact us for all subscription options, including access to backvolumes, multisite & archival licensing at subscriptions@scientific.net

Share:



Journals

Books

Engineering Research

- Advanced Engineering Forum >
- Applied Mechanics and Materials >
- Engineering Innovations >
- Journal of Biomimetics, Biomaterials and Biomedical Engineering >
- International Journal of Engineering Research in Africa >

Materials Science

- Advanced Materials Research >
- Defect and Diffusion Forum >
- Diffusion Foundations and Materials Applications >
- Journal of Metastable and Nanocrystalline Materials >
- Journal of Nano Research >
- Key Engineering Materials** <
- Materials Science Forum >
- Nano Hybrids and Composites >
- Solid State Phenomena >

Engineering Series

- Advances in Science and Technology >
- Construction Technologies and Architecture >

Special Book Collections

- Foundations of Materials Science and Engineering >
- Scientific Books Collection >
- Specialized Collections >
- Retrospective Collection >

Newsletter Subscription

First Name *

Last Name *

Email *

SUBSCRIBE

Subscribe to our Newsletter and get informed about new publication regularly and **special discounts for subscribers!**

Home » [Key Engineering Materials](#) » Editorial Board



Key Engineering Materials - Editorial Board

ISSN: 1662-9795

Details

Volumes

Editorial Board

Founding Editor

Fred H. Wohlbiert

Editor(s) in Chief

Assoc. Prof. Dr. Cecilia Poletti

SEND MESSAGE ✉

[ORCID](#)

Graz University of Technology, Institute of Materials Science, Joining and Forming; Kopernikusgasse 24/1, Graz, A-8010, Austria;

Prof. Dr. José Manuel Torralba

SEND MESSAGE ✉

[ORCID](#)

Universidad Carlos III de Madrid, IMDEA Materials; Av. Universidad 30, Leganés, 28911, Spain;

Editorial Board

Prof. Aldo Roberto Boccaccini

University of Erlangen-Nürnberg, Institute of Biomaterials, Department of Materials Science and Engineering; Cauerstrasse 6, Erlangen, 91058, Germany;

Prof. Mónica Campos

University Carlos III de Madrid, Department of Materials Science and Engineering; Av. Universidad 30, Leganés-Madrid, 28911, Spain;

[ORCID](#)

Dr. Li Chang

University of Sydney, School of Aerospace, Mechanical and Mechatronic Engineering; Sydney, Australia, 2006;

Prof. Yi Bing Cheng

Monash University, Department of Materials Science and Engineering; PO Box 197, Caulfield East, Australia, 3145;

[ORCID](#)

Prof. Ilaria Cristofolini

University of Trento, Department of Industrial Engineering; Via Sommarive 9, Povo, 38123, Italy;

[ORCID](#)

Prof. Robert Danzer

Montanuniversität Leoben, Institut für Struktur- und Funktionskeramik; Peter-Tunner-Strasse 5, Leoben, A-8700, Austria;

Prof. Suong Van Hoa

Concordia University, Department of Mechanical and Industrial Engineering; 1455 Demaisonneuve West # EV 4-145, Montreal, Canada, H3G1M8;

Prof. Xiao Zhi Hu

University of Western Australia, School of Mechanical and Chemical Engineering; Perth, Australia, WA 6009;

Prof. Mohamed A. Taha

Ain-Shms University, Department of Design and Production Engineering, Faculty of Engineering; Khalifa El-Maamon st, Abbasiya sq., Cairo, Egypt, 11566;

Prof. Alejandro Ureña Fernandez

Universidad Rey Juan Carlos (URJC), Department of Materials Science and Engineering; Tulipan s/n 28933, Mostoles, Madrid, Spain;

Prof. Dragan P. Uskokovic

Institute of Technical Sciences of the Serbian Academy of Sciences and Arts; Knez Mihailova 35/IV, Belgrade, Serbia;

Prof. Maria Teresa Vieira

Universidade de Coimbra, ICEMS - Instituto de Ciência e Engenharia de Materiais e Superfícies; Pólo II-Pinhal de Marrocos, Coimbra, 3030-788, Portugal;

[ORCID](#)

Prof. Zhi Rui Wang

University of Toronto, Department of Materials Science and Engineering; 184 College Street, Toronto, Canada, M5S 3E4;

Prof. Ming Xing Zhang

University of Queensland, School of Mechanical and Mining Engineering; St. Lucia, Queensland, Australia, QLD 4072;



Volumes

Key Engineering Materials
Vol. 855



Key Engineering Materials
Vol. 854



Key Engineering Materials
Vol. 853



Key Engineering Materials
Vol. 852



Key Engineering Materials
Vol. 851



Key Engineering Materials
Vol. 850



Key Engineering Materials
Vol. 849



Key Engineering Materials
Vol. 848



Key Engineering Materials
Vol. 847



Key Engineering Materials
Vol. 846



Key Engineering Materials
Vol. 845



Key Engineering Materials
Vol. 844



Key Engineering Materials
Vol. 843



[Home](#) » [Key Engineering Materials](#) » Key Engineering Materials Vol. 849

Key Engineering Materials Vol. 849

DOI: <https://doi.org/10.4028/www.scientific.net/KEM.849>

ToC: [Table of Contents](#)

Search

< 1 2 3 >

Paper Title	Page
Physical-Mechanical Properties of Paving Block from Plastic Shopping Bags Waste and Sand Authors: Iswahyuni, Indri Hermiyati, Suharyanto, Uma Fadzilia Arifin, Dewi Nur Hidayati Abstract: Plastic shopping bags are easy to obtain for free or at low prices, hence contribute as the highest quantity among plastic waste. The plastic shopping bags waste ...more	61
Quality Improvement of Recycled Paper with Extracted Xylan from Corncobs Authors: Gita Indah Budiarti, Dika Fajariyanto, Okta Hendratno Abstract: Several Indonesian paper mills utilize used paper as feedstock as the price is much cheaper and abundant availability, but the strength of the paper product tends to ...more	67
Utilization of Silica from Indonesian Solid Wastes as Catalyst Materials Authors: Firman Kurniawansyah, Amila D. Istiqomah, Aisyah J. Malahayati, Himawan Tri Bayu Murti Petrus, Achmad Roesyadi Abstract: Synthesizing materials can be attempted by utilizing alternative sources such as wastes or disposed/by-products of certain activities. In this article, exploration of silica ...more	72
Silica from Geothermal Waste as Reinforcing Filler in Artificial Leather Authors: Muh. Wahyu Syabani, Ina Amaliyana, Indri Hermiyati, Yayat Iman Supriyatna Abstract: The main components of artificial leather were polymer, plasticizer, stabilizer, and filler. Silica is one of the commons reinforcing filler for many composites. Meanwhile, ...more	78
Styrene Recovery from the Pyrolysis of Polystyrene Waste Using Bentonite and Natural Zeolite Catalyst Authors: Pramudia Bagus Dewangga, Rochmadi, Chandra Wahyu Purnomo Abstract: Polystyrene is a type of plastic that is widely used in daily life. It is applied for decoration, food packaging, and electronic packaging process. However, the use of ...more	84
Triacetin Synthesis as Bio-Additive from Glycerol Using Homogeneous and Heterogeneous Catalysts Authors: Zahrul Mufrodi, Erna Astuti, Mochamad Syamsiro, Sutiman, Suryo Purwono Abstract: The government tries to anticipate the needs of fuel in Indonesia. Efforts to develop new fuels have also been done. New fuels and renewable energy that has been ...more	90
Improvement of Biocomposite Properties Based Tapioca Starch and Sugarcane Bagasse Cellulose Nanofibers Authors: Mochamad Asrofi, Sujito, Edi Syafri, S.M. Sapuan, R.A. Ilyas Abstract: Biocomposite based tapioca starch (TS) and sugarcane bagasse cellulose nanofibers (SBCN) was made through casting method. SBCN was prepared by chemical and ...more	96
Potency of Rare Earth Elements and Yttrium in Indonesia Coal Ash Authors: Widya Rosita, Dea Anisa Ayu Besari, I Made Bendiyasa, Indra Perdana, Ferian Anggara, Himawan Tri Bayu Murti Petrus Abstract: Indonesia coal ash is predicted to reach 10.8 million tons in the year 2020 but its utilization is still limited. In the last decade, coal ash has become a promising REY source ...more	102
Zinc Oxide Recovery from Solid Waste of Electric Arc Furnace Dust (EAFD) Using Hydrometallurgical Method Authors: Widi Astuti, Agus Haerudin, Istihanah Nurul Eskani, Fajar Nurjaman, Aulia Pertiwi Tri Yuda, Joni Setiawan, Isnaeni, Farida, Dwi Wiji Lestari Abstract: Indonesia coal ash is predicted to reach 10.8 million tons in the year 2020 but its utilization is still limited. In the last decade, coal ash has become a promising REY source ...more	108
Characterization and A Preliminary Study of TiO₂ Synthesis from Lampung Iron Sand Authors: Yayat Iman Supriyatna, Slamet Sumardi, Widi Astuti, Athessia N. Nainggolan, Ajeng W. Ismail, Himawan Tri Bayu Murti Petrus, Agus Prasetya Abstract: The purpose of this study is to characterize Lampung iron sand and to conduct preliminary experiments on the TiO ₂ synthesis which can be used for the manufacturing of ...more	113

Showing 11 to 20 of 23 Paper Titles

< 1 2 3 >

Triacetin Synthesis as Bio-Additive from Glycerol Using Homogeneous and Heterogeneous Catalysts

ZAHRUL Mufrodi^{1,a}, ERNA Astuti^{1,b*}, MOCHAMAD Syamsiro²,
BUDI Santosa³, SUTIMAN⁴ and SURYO Purwono⁵

¹Department of Chemical Engineering, Universitas Ahmad Dahlan, Jl. Ring Road Selatan, Yogyakarta, Indonesia

²Department of Mechanical Engineering, Janabadra University, Jl. Tentara Rakyat Mataram, Yogyakarta, Indonesia

³Department of Automotive Technology of Vocational Education, Universitas Ahmad Dahlan, Jl. Pramuka 42 Sidikan, Yogyakarta, Indonesia

⁴Department of Automotive Technical Education, Universitas Negeri Yogyakarta, Jl. Colombo No. 1 Karangmalang, Yogyakarta, Indonesia

⁵Department of Chemical Engineering, Universitas Gadjah Mada, Jl. Grafika, Sleman, Yogyakarta, Indonesia

^azahrul.mufrodi@che.uad.ac.id, ^berna.astuti@che.uad.ac.id

Keywords: Biodiesel, Glycerol, Triacetin, Bio-additive.

Abstract. The government tries to anticipate the needs of fuel in Indonesia. Efforts to develop new fuels have also been done. New fuels and renewable energy that has been developed are water, wind, bioenergy, solar, ocean, and geothermal. Bioenergy which now widely developed is biodiesel. The development of biodiesel industry which has increased rapidly, was accompanied by government policies that are written in the blueprint of the national energy management, make the biodiesel production grow rapidly. Glycerol as a by-product of the biodiesel industry is available abundantly, so it is necessary to study alternative uses. One alternative is to process glycerol into triacetin which can be used as bio-additive. The reaction between glycerol and acetic acid using a batch reactor was done on the mole ratio of catalyst/glycerol of 3.0%, the mole ratio of acetic acid/glycerol of 3/1, reaction temperature of 80-110°C and reaction time of 60 minutes. The optimum condition is achieved when the batch reaction was run with catalyst Amberlyst-15 at temperature of 110°C with conversion of 97.52% and selectivity triacetin of 89.74%.

Introduction

Indonesia is one of the prosperous countries in terms of energy because of its availability in abundance. The population growth rate is constantly rise so that energy demands also increases. This fact changes Indonesia which used to be the oil-exporting country become a net importer of oil. The government through the ministry of energy and mineral resources have the vision to seek and to replace the use of fuel by increasing the role of alternative energy from new renewable energy as a solution to reduce the dependence of fossil energy. The renewable energy consists of the energy of water, wind, biomass or biofuels, solar energy, ocean energy, and geothermal energy. Renewable energy that still needs to be processed before used is biofuels.

The government has adopted a policy to increase the percentage use of biofuels as an anticipatory step because of the reduced supply of oil from fossil fuels and the increasing market demand. This policy is included in the roadmap of biodiesel in the blueprint of the national energy management from 2006 to 2025. That blueprint is the mandate of the Presidential Decree No. 5 of 2006, which is become the national energy development reference. In the period of 2011-2015, the government has a target the supply of biodiesel as many as 3 million kL/year or 15% of existing solar supply. Later in the period of 2016-2025, this target increased to 6.4 kL/year which will be used as the transportation needs of 20% and consumption of 5%. Biodiesel is a diesel fuel from

vegetable oil by trans-esterification. Biodiesel is one of the best alternatives fuels which have several advantages such as renewable, high cetane number, high viscosity, better lubrication properties of the fuel, has low sulfur content, and low emission.

The biodiesel production will produce glycerol as by product. As prediction, in 2020 Indonesia will produce glycerol 0.42 million kL/year. Glycerol would be a problem if it is not used and just dumped into the environment. Therefore, it is necessary to study alternative uses. There are several alternative utilization of glycerol into value-added materials. Glycerol into triacetin which can be used as bio-additive.

The abundance of glycerol will result in decreased sales value of glycerol as a byproduct of the biodiesel plant. It should be anticipated to improve the usefulness of glycerol both in terms of quantity and its variants. With the increasing usefulness of glycerol will result in the higher price of glycerol that will increase the profitability of biodiesel plants. Among the usefulness of glycerol has been investigated are polyglycidyl nitrate [1-4], bioadditive triacetin [5-8], as an ingredient in pharmaceutical products, polyether, emulsifiers, fabric softener, stabilizers, preservatives in bread, ice cream, cosmetic ingredients, and others [9, 10].

Synthesis of triacetin with solid catalysts have been carried out using phosphotungstic [11], Amberlyst-15 or SAC-13 (Nafion-SiO₂) [12], Amberlyst-15, K-10, the acid Niobic, HZMS-5 and HUSY [13], Zirconia-based solid acid [14] tungstophosphoric acid (TPA) [15], and PW2_AC [16]. The use of solid catalysts has ease of product purification process. Many studies have also been conducted to study the reaction kinetics with cation-exchange resin as a solid catalyst [5, 17]. While the reaction kinetics without catalyst was studied by Galan *et al* [10]. Then the study of continuous process and reaction kinetics using a packed bed reactor and cation exchange resin as catalyst were proposed by Fukumura *et al.* [18] and Mufrodi *et al.* [6, 8]. The reaction mechanism is simplified into three consecutive main reactions:

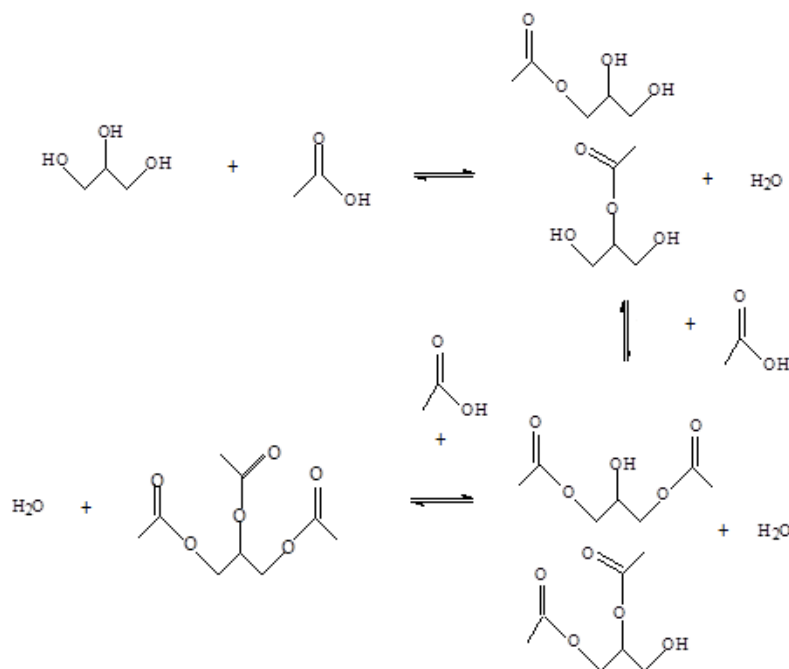


Fig. 1. Reaction mechanism

Methods

The chemicals used in the experiments were acetic acid, 98% purity (Petrochemical Chang Cun), glycerol, 93% purity (P & G Chemicals), amberlyst-15, silica-alumina, modified zeolite and sulfuric acid (Merck Index No. 016-020-00-8) as catalysts.

The reaction was done in a three-neck flask equipped with a heating mantle, cooling system, mercury stirrer, thermometer and sampling equipment (Fig. 2). The reaction between glycerol and acetic acid was done with the mole ratio of catalyst/glycerol of 3% using several types of catalyst: acetic acid, amberlyst-15, silica-alumina and modified zeolite. The reaction temperatures were 80°C, 90°C, 100°C, and 110°C.



Fig. 2. Batch reactor

Samples were analyzed using gas chromatography (GC) agilent 6890N MSD 5975B, Model Number: Agilent 19091S-433, HP-5ms column of 5%. Phenyl methyl siloxane, the temperature of the detector: MS Quad 150°C, the injector volume of 1 microliter, the injector temperature 275°C, and the injector pressure of 3.27 psi.

Results and Discussion

Experiments of triacetin from glycerol and acetic acid to the reaction temperature variation run at 80°C and 90°C, the mole ratio of catalyst/glycerol of 3% and the mole ratio of acetic acid/glycerol of 3/1. The temperature was before boiling water (100°C). The effect of various acid catalysts on Glycerol conversion and product selectivity at temperature 80°C and 90°C can be seen in Table 1.

Table 1. The effect of various acid catalysts on Glycerol conversion and product selectivity at 80°C and 90°C

Catalyst	Conversion, %		Selectivity, %					
	80°C	90°C	Monoacetin		diacetin		Triacetin	
			80°C	90°C	80°C	90°C	80°C	90°C
1. Sulfuric acid	87.69	89.52	16.41	13.74	23.85	24.61	59.74	61.65
2. Amberlyst-15	98.23	98.85	02.94	2.63	14.64	12.74	82.42	84.63
3. Silica alumina	84.56	86.22	20.38	20.05	32.74	30.99	46.88	48.96
4. Modified zeolite	86.03	87.94	19.35	18.12	27.43	25.43	53.22	56.45

Table 1 shows that glycerol conversion and triacetin selectivity are higher when the reaction temperature is increased from temperature 80°C to 90°C for all catalysts various. The best performance of catalysts is amberlyst-15, with maximum conversion is 98.85% and triacetin selectivity is 84.63%. In general, the temperature rose of 80°C to 90°C will result in decreased selectivity of monoacetin and diacetin. The increase in the average glycerol conversion of temperature from 80°C to 90°C with catalyst acetic acid, amberlyst-15, silica alumina and modified zeolite are 2.09%, 0.06%, 1.96% and 2.22%.

The effect of various acid catalysts on glycerol conversion and product selectivity at temperatures 100°C and 110°C can be seen Table 2.

Table 2. The effect of various acid catalysts on glycerol conversion and product selectivity at 100°C and 110°C

No	Catalyst	Conversion, %		Selectivity, %					
		100°C	110°C	Monoacetin		Diacetin		Triacetin	
				100°C	110°C	100°C	110°C	100°C	110°C
1.	Sulfuric acid	90.21	93.45	16.83	13.07	20.74	19.61	62.43	67.32
2.	Amberlyst-15	96.42	97.52	00.19	00.03	11.89	10.23	87.92	89.74
3.	Silica alumina	88.65	87.43	17.98	18.47	33.97	32.84	48.05	47.69
4.	Modified zeolite	89.22	89.02	15.13	15.95	24.65	24.63	60.22	59.42

The reaction between glycerol and acetic acid will produce triacetin as the main product, monoacetin and diacetin as intermediate products, and water as a side product. The reactions are series-parallel reactions and reversible reactions. The glycerol conversion and triacetin selectivity were calculated at a reaction temperature of 100°C and 110°C. These temperatures were chosen because the boiling point of water is 100°C. As seen in Table 2, the performance of two catalysts, acetic acid and amberlyst-15, increase in the higher temperature, but the performance of silica-alumina and modified zeolite decrease. Therefore, for sulfuric acid and amberlyst-15 catalysts, if the reaction temperature is increasing from 100°C to 110°C than glycerol conversion and triacetin selectivity are increasing too. For silica-alumina and modified zeolite catalysts, if the reaction temperature is increasing from 100°C to 110°C than glycerol conversion and triacetin selectivity are decreasing. The best results get on the mole ratio of catalyst and glycerol of 3%, the temperature of 110°C, the reaction time of 60 minutes, using catalyst amberlyst-15 with glycerol conversion of 97.52% and triacetin selectivity of 89.74%.

This paper also studies the effect of the addition of triacetin into biodiesel. Biodiesel can be made using waste cooking oil [19, 20] and chicken fat [21]. Biodiesel performance without triacetin, mix with 10% and 20% triacetin can be seen in Table 3.

Table 3. Properties of biodiesel without and with triacetin

No	Analysis	Product analysis				Analysis method (ASTM)
		Standard Biodiesel	Biodiesel+0% of triacetin	Biodiesel+10% of triacetin	Biodiesel+20% of triacetin	
1.	viscosity kinematic (40°C), mm ² /s	2.3-6.0	4.821	4.594	4.211	D 445
2.	Flash point, °C	>100	177	141	129	D 93
3.	pour point, °C	<18	9	12	6	D 97

High viscosity causes atomized fuel to become large granules so that fuel injection cannot be carried out properly if sprayed into the combustion chamber. The lower the viscosity of the fuel, causes the better the fuel combustion. The addition of triacetin on biodiesel has an impact on reducing viscosity so that biodiesel is more flammable. Flashpoint is the lowest temperature at

which a solvent can form an ignitable mixture in air near the surface of the liquid. Decreased of the flash point makes biodiesel more combustible. Similarly, a decrease in pour point will make it easier for biodiesel to flow at lower temperatures. Adding triacetin to biodiesel causes flash point and pour point to decrease so that biodiesel performance is getting better.

Conclusion

At the synthesise of triacetin from glycerol and acetic acid, in general, the temperature rose of 80°C to 90°C will result in decreased selectivity in monoacetin and diacetin. The optimum conditions are mole ratio of catalyst and glycerol of 3.0%, the temperature of 110°C, the reaction time of 60 minutes, and using Amberlyst-15 as a catalyst. The best results are glycerol conversion of 97.52% and triacetin selectivity of 89.74%.

Acknowledgements

The authors would like to acknowledge for financial support of this work through the research grant of Pasca Doctor 2018 project no. PPD-113/SKPP/III/2018 from The Ministry of Research Technology and Higher Education of the Republic of Indonesia

References

- [1] E. Astuti, Supranto, Rochmadi, A. Prasetya, Kinetic modelling of nitration of glycerol: three controlling reactions model, *Engineering Journal*. 18 (2014) 73.
- [2] E. Astuti, Supranto, Rochmadi, A. Prasetya, K. Ström, B. Andersson, Determination of the temperature effect on glycerol nitration processes using the hysys predictions and the laboratory experiment, *Indo. J. Chem.* 14 (2014) 57.
- [3] E. Astuti, Supranto, Rochmadi, A. Prasetya, Optimum operating conditions of glycerol nitration to produce 1, 3-dinitroglycerin kinetic modeling of nitration of glycerol, *ARPN Journal of Engineering and Applied Sciences*. 11 (2016) 5203.
- [4] E. Astuti, Supranto, Rochmadi, A. Prasetya, Optimum conditions for the formation of glycidyl nitrate from 1,3-dinitroglycerin, *Key Engineering Materials*. 718 (2017) 95.
- [5] Z. Mufrodi, E. Astuti, A. Aktawan, S. Purwono, The effect of recycle stream on the selectivity and yield of the formation of triacetin from glycerol, *IOP Conference Series: Earth and Environmental Science*. 175 (2018) 1-6.
- [6] Z. Mufrodi, Rochmadi, Sutijan, A. Budiman, Synthesis acetylation of glycerol using batch reactor and continuous reactive distillation column, *Engineering Journal*. 18 (2014) 20-29.
- [7] R. H. Cahyono, Z. Mufrodi, A. Hidayat, A. Budiman. Acetilation of Glycerol for Triacetin Production Using Zr-Natural Zeolite Catalyst, *ARPN Journal of Engineering and Applied Sciences*. 11:8 (2016) 5194-5197.
- [8] Z. Mufrodi, A. Budiman, S. Purwono. Operation conditions in synthesise of bioaditive from glycerol as by-product biodiesel: a review, *Energy Procedia*. 145 (2018) 434-439.
- [9] J. Bonet, J. Costa, R. Sire, J.M. Reneaume, E.A. Plesu, V. Plesu, G. Bozga. Revalorization of glycerol: comestible oil from biodiesel synthesis, *Food and Bioproducts Process*. 87 (2009) 171-178.
- [10] M. I. Galan, J. Bonet, R. Sire, J.M. Reneaume, A.E. Plesu, From residual to use oil: revalorization of glycerine from the biodisel synthesis, *Bioresource Tech*. 100 (2009) 3775-3778.

-
- [11] M. Zang, X. Yuan, Synthesis of glycerol triacetate catalyzed by phosphotungstic acid, *Hecheng Huaxue*. 9:5 (2001) 469.
- [12] J.A. Melero, R.V. Grieken, G. Morales, M. Paniagua, Acidic mesoporous silica for the acetylation of glycerol: synthesis of bioadditives to petrol fuel, *Energy and Fuels*. 21 (2007) 1782-1791.
- [13] V.L.C. Goncalves, B.P. Pinto, J.C. Silva, and C.J.A. Mota, Acetylation of glycerol catalyzed by different solid acids, *Catalysis Today*. 133 (2008) 673-677.
- [14] P. S. Reddy, P. Sudarsanam, G. Raju, B. M. Reddy, Synthesis of bio-additives: acetylation of glycerol over zirconia-based solid acid catalysts, *Catal Commun*. 11 (2010) 1224-1228.
- [15] M. Balaraju, P. Nikhitha, K. Jagadeeswaraiyah, K. Srilatha, P.S.S. Prasad, N. Lingaiah, Acetylation of glycerol to synthesize bioadditives over niobic acid supported tungstophosphoric acid catalysts, *Fuel Process. Tech*. 91 (2010) 249.
- [16] P. Ferreira, I. M. Fonseca, A.M. Ramos, J. Vital, J. E. Castanheiro, Acetylation of glycerol over heteropolyacids supported on activated carbon, *Catal Commun*. 12 (2011) 573-576.
- [17] D. Gelosa, M. Ramaioli, G. Valente, M. Morbidelli, Chromatographic reactors: esterification of glycerol with acetic acid using acidic polymeric resins, *Ind. Eng. Chem. Res*. 42 (2003) 6536-6544.
- [18] T. Fukumura, T. Toda, Y. Seki, M. Kubo, N. S Kitakawa, T. Yonemoto, Catalytic synthesis of glycerol monoacetate using a continuous expanded bed column reactor packed with cation-exchange resin, *Ind. Eng. Chem. Res*. 48 (2009) 1816-1823.
- [19] A. Aktawan and Z. Mufrodi, Small-scale production of biodiesel through transesterification process of waste or used cooking oil, *IOP Conference Series: Earth and Environmental Science*. 245 (2019) 1-6.
- [20] E. Astuti, Z. Mufrodi, The optimum condition of biodiesel production from waste cooking oil using continuous stirred tank reactor, *International Journal of Smart Grid and Clean Energy*. 8:2 (2019) 201-205.
- [21] G. H. Soegiantoro, J. Chang, P. Rahmawati, M.F. Christiani, Z. Mufrodi, Home-made ECO green biodiesel from chicken fat (CIAT) and waste cooking oil (pail), *Energy Procedia*. 158 (2019) 1105-1109.