

Engineering Research

- Advanced Engineering Forum >
- Applied Mechanics and Materials >
- Engineering Chemistry >
- Engineering Innovations >
- Journal of Biomimetics, Biomaterials and Biomedical Engineering >
- International Journal of Engineering Research in Africa >

Materials Science

- Advanced Materials Research >
- Defect and Diffusion Forum >
- Diffusion Foundations and Materials Applications >
- Journal of Metastable and Nanocrystalline Materials >
- Journal of Nano Research >
- Key Engineering Materials** <
- Materials Science Forum >
- Nano Hybrids and Composites >
- Solid State Phenomena >

Engineering Series

- Advances in Science and Technology >
- Construction Technologies and Architecture >

Special Book Collections

- Foundations of Materials Science and Engineering >
- Scientific Books Collection >
- Specialized Collections >
- Retrospective Collection >

Newsletter Subscription

First Name *

Last Name *

Email *

SUBSCRIBE

Subscribe to our Newsletter and get informed about new publication regularly and **special discounts for subscribers!**

Key Engineering Materials - Details


ISSN: 1662-9795



Details

Volumes

Editorial Board

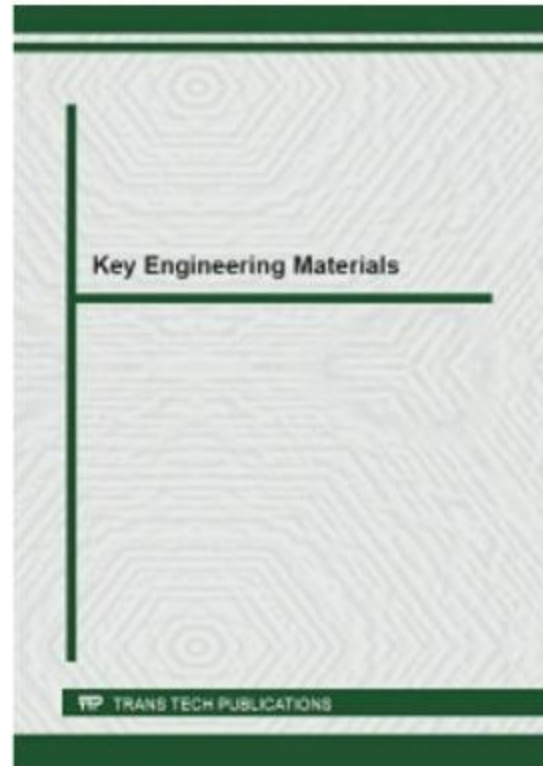

About:

Key Engineering Materials is a peer-reviewed periodical which covers entire range of basic and applied aspects of the synthesis and research, modelling, processing and application of advanced engineering materials. "Key Engineering Materials" is one of the largest periodicals in its field.

"Key Engineering Materials" specializes in the publication of thematically complete volumes and complete special topic volumes. Periodical considers stand-alone papers by individual authors.

Authors retain the right to publish an extended and significantly updated version in another periodical.

SUBMIT PAPER

All published materials are archived with [PORTICO](#) and [CLOCKSS](#).

RECENT VOLUME

Abstracted/Indexed in:
 SCOPUS www.scopus.com.
 REAXYS www.reaxys.com.

- Ei Compendex www.ei.org/.
- Inspec (IET, Institution of Engineering Technology) www.theiet.org.
- Chemical Abstracts Service (CAS) www.cas.org.
- Google Scholar scholar.google.com.
- GeoRef www.americangeosciences.org/georef.
- INIS Atomindex (International Nuclear Information System) <https://inis.iaea.org>.
- Cambridge Scientific Abstracts (CSA) www.csa.com.
- ProQuest www.proquest.com.
- Ulrichsweb www.proquest.com/products-services/Ulrichsweb.html.
- EBSCOhost Research Databases www.ebscohost.com/.
- Zetoc zetoc.jisc.ac.uk.
- EVISA <http://www.speciation.net/Public/Linklists/EVISA.html>.
- Index Copernicus Journals Master List www.indexcopernicus.com.
- WorldCat (OCLC) www.worldcat.org.

ISSN print 1013-9826 ISSN cd 1662-9809 ISSN web 1662-9795

Additional Information:

Please ask for additional information: kem@scientific.net
 34 volumes per year

Subscription

WEB ACCESS 2023: Volumes 939 - 972 (34 Vols.)
 Access January - December 2023

The Journal published as of 1982 - 2022: 938 Vols.

Online Subscription Price 2023: EUR 2'875 / US\$ 3'130 (Option 1)


Online Subscription Price 2023 with access only to all Back Volumes: EUR 4'110 / USD 4'505 (Option 2)

Back Files purchase (perpetual access) on request (Option 3)

Benefits to libraries: • Outright purchase • Perpetual access rights
 • Multiple concurrent users • Long-time preservation • COUNTER-compliant usage statistics • Pick & Choose licensing options as well as package options. • 24/7 access on www.scientific.net • Freedom to use offline or print • Advanced search options

Please contact us for all subscription options, including access to backvolumes, multisite & archival licensing at subscriptions@scientific.net

Share:

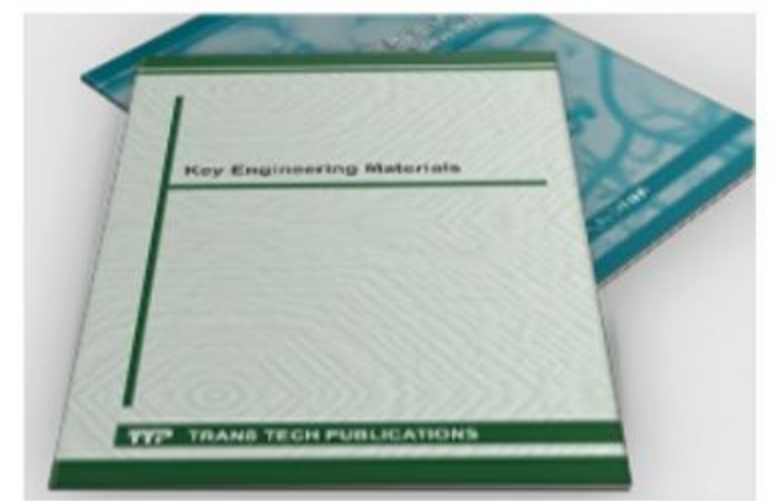

Journals

Books

Engineering Research

Advanced Engineering Forum >

Applied Mechanics and Materials >

Engineering Chemistry >

Engineering Innovations >

Journal of Biomimetics, Biomaterials and Biomedical Engineering >

International Journal of Engineering Research in Africa >

Materials Science

Advanced Materials Research >

Defect and Diffusion Forum >

Diffusion Foundations and Materials Applications >

Journal of Metastable and Nanocrystalline Materials >

Journal of Nano Research >

Key Engineering Materials <

Materials Science Forum >

Nano Hybrids and Composites >

Solid State Phenomena >

Engineering Series

Advances in Science and Technology >

Construction Technologies and Architecture >

Special Book Collections

Foundations of Materials Science and Engineering >

Scientific Books Collection >

Specialized Collections >

Retrospective Collection >

Newsletter Subscription

First Name *

Last Name *

Email *

SUBSCRIBE

Subscribe to our Newsletter and get informed about new publication regularly and **special discounts for subscribers!**

Home » [Key Engineering Materials](#) » Editorial Board



Key Engineering Materials - Editorial Board

ISSN: 1662-9795



Details

Volumes

Editorial Board

Founding Editor

Fred H. Wohlbiert

Editor(s) in Chief

Assoc. Prof. Dr. Cecilia Poletti

SEND MESSAGE ✉

[ORCID](#)

Graz University of Technology, Institute of Materials Science, Joining and Forming; Kopernikusgasse 24/1, Graz, A-8010, Austria;

Prof. Dr. José Manuel Torralba

SEND MESSAGE ✉

[ORCID](#)

Universidad Carlos III de Madrid, IMDEA Materials; Av. Universidad 30, Leganés, 28911, Spain;

Editorial Board

Prof. Aldo Roberto Boccaccini

University of Erlangen-Nürnberg, Institute of Biomaterials, Department of Materials Science and Engineering; Cauerstrasse 6, Erlangen, 91058, Germany;

Prof. Mónica Campos

University Carlos III de Madrid, Department of Materials Science and Engineering; Av. Universidad 30, Leganés-Madrid, 28911, Spain;

[ORCID](#)

Dr. Li Chang

University of Sydney, School of Aerospace, Mechanical and Mechatronic Engineering; Sydney, Australia, 2006;

Prof. Yi Bing Cheng

Monash University, Department of Materials Science and Engineering; PO Box 197, Caulfield East, Australia, 3145;

[ORCID](#)

Prof. Ilaria Cristofolini

University of Trento, Department of Industrial Engineering; Via Sommarive 9, Povo, 38123, Italy;

[ORCID](#)

Prof. Robert Danzer

Montanuniversität Leoben, Institut für Struktur- und Funktionskeramik; Peter-Tunner-Strasse 5, Leoben, A-8700, Austria;

Prof. Suong Van Hoa

Concordia University, Department of Mechanical and Industrial Engineering; 1455 Demaisonneuve West # EV 4-145, Montreal, Canada, H3G1M8;

Prof. Xiao Zhi Hu

University of Western Australia, School of Mechanical and Chemical Engineering; Perth, Australia, WA 6009;

Prof. Mohamed A. Taha

Ain-Shms University, Department of Design and Production Engineering, Faculty of Engineering; Khalifa El-Maamon st, Abbasiya sq., Cairo, Egypt, 11566;

Prof. Alejandro Ureña Fernandez

Universidad Rey Juan Carlos (URJC), Department of Materials Science and Engineering; Tulipan s/n 28933, Mostoles, Madrid, Spain;

Prof. Dragan P. Uskokovic

Institute of Technical Sciences of the Serbian Academy of Sciences and Arts; Knez Mihailova 35/IV, Belgrade, Serbia;

Prof. Maria Teresa Vieira

Universidade de Coimbra, ICEMS - Instituto de Ciência e Engenharia de Materiais e Superfícies; Pólo II-Pinhal de Marrocos, Coimbra, 3030-788, Portugal;

[ORCID](#)

Prof. Zhi Rui Wang

University of Toronto, Department of Materials Science and Engineering; 184 College Street, Toronto, Canada, M5S 3E4;

Prof. Ming Xing Zhang

University of Queensland, School of Mechanical and Mining Engineering; St. Lucia, Queensland, Australia, QLD 4072;

Volumes

Key Engineering Materials
Vol. 855



Key Engineering Materials
Vol. 854



Key Engineering Materials
Vol. 853



Key Engineering Materials
Vol. 852



Key Engineering Materials
Vol. 851



Key Engineering Materials
Vol. 850



Key Engineering Materials
Vol. 849



Key Engineering Materials
Vol. 848



Key Engineering Materials
Vol. 847



Key Engineering Materials
Vol. 846



Key Engineering Materials
Vol. 845



Key Engineering Materials
Vol. 844



Key Engineering Materials
Vol. 843



[Home](#) » [Key Engineering Materials](#) » Key Engineering Materials Vol. 849

Key Engineering Materials Vol. 849

DOI: <https://doi.org/10.4028/www.scientific.net/KEM.849>

ToC: [Table of Contents](#)

Search

1 2 3 >

Paper Title



Preface

Gasification of Oil Palm Shells and Empty Fruit Bunches to Produce Gas Fuel

Authors: Agus Aktawan, Maryudi, Siti Salamah, Erna Astuti

Abstract: National energy needs have been met by non-renewable energy resources, such as natural gas, petroleum, coal and so on. However, non-renewable energy reserves are [...more](#)

3

Utilization of Tea Tree Branches as a Source of Thermal Energy

Authors: Rudi Firyanto, Heru Susanto, Retno S.L. Ambarwati, Suherman, Widayat

Abstract: Energy has an important role in the survival of the tea processing industry. The costs for energy generation and application have a large contribution to the total cost of [...more](#)

8

Production of Bio-Crude Oil from Microalgae *Chlorella* sp. Using Hydrothermal Liquefaction Process

Authors: Aldeniro Arief Bawono, Hisyam Adhisatrio, Laras Prasakti, Yano Surya Pradana

Abstract: Currently, microalgae have attracted as potential feedstock for biofuel production. Hydrothermal liquefaction was proposed as technology to convert microalgae [...more](#)

14

Potential Application of Sago Pulp Briquette for Electricity Generation Using Gasification Technology in Papua Province, Indonesia

Authors: Mochamad Syamsiro, Muhammad Noviansyah Aridito, Syamsul Ma'arif

Abstract: Indonesia is a tropical country which become one of the largest producer country of biomass especially from agricultural and forestry sector. One of the biomass source that [...more](#)

20

Enhancement of Biogas Production in Anaerobic Digestion from Sludge of Dairy Waste with Fixed Bed Reactor by Using Natural Zeolite

Authors: Harun Pampang, Chandra Wahyu Purnomo, Rochim Bakti Cahyono

Abstract: In dairy waste treatment plant, there was sludge accumulation of material organic sediment on the bottom of the container. This sludge has a very strong odor, [...more](#)

27

Influence of Natural and H-Beta Zeolites on Yield and Composition of Non-Polar Fraction of Bio-Oil in Slow Co-Pyrolysis of Biomass and Polypropylene

Authors: Dijan Supramono, Syafira Tiaradiba

Abstract: The non-oxygenated fraction of bio-oil is precursor of the formation of biofuel because it contains hydrocarbon only. Zeolite catalysts have been proved to improve the [...more](#)

34

Utilization of *Casuarina montana* Pruning Waste Biomass as Chemical or Energy Resources

Authors: Denny Irawati, David Usman, Naresvara Nircela Pradipta

Abstract: In Indonesia, *Casuarina montana* usually planted as a road shading tree or in the home garden. This tree will be pruned periodically to reduce the amount of the canopy and [...more](#)

40

Bio-Oil Characterizations of *Spirulina Platensis* Residue (SPR) Pyrolysis Products for Renewable Energy Development

Authors: Siti Jamilatun, Aster Rahayu, Yano Surya Pradana, Budhijanto Budhijanto, Rochmadi, Arief Budiman

Abstract: Nowadays, energy consumption has increased as a population increases with socio-economic developments and improved living standards. Therefore, it is necessary to [...more](#)

47

A Novel Immobilization Method of *Saccharomyces cerevisiae* on Fermentation of Nipa Palm Sap for Fuel Grade Bioethanol Production

Authors: Chairul, Evelyn, Syaiful Bahri, Ella Awaltanova

Abstract: Nipa palm (*Nypa fruticans*) spreads abundantly in the mangrove forests of eastern coast of Sumatera Island, Indonesia. Nipa palm sap can be used as a very high-gravity [...more](#)

53

Showing 1 to 10 of 23 Paper Titles

1 2 3 >

Gasification of Oil Palm Shells and Empty Fruit Bunches to Produce Gas Fuel

AGUS Aktawan^{1,a}, MARYUDI^{1,b,*}, SITI Salamah^{1,c}, and ERNA Astuti^{1,d}

¹Chemical Engineering Department, Universitas Ahmad Dahlan

^aagus.aktawan@che.uad.ac.id, ^{b,*}maryudi@che.uad.ac.id, ^csitisalamah@che.uad.ac.id,
^derna.astuti@che.uad.ac.id

Keywords: Oil Palm Shells, Empty Fruit Bunches, Gasification, Gas Fuel.

Abstract. National energy needs have been met by non-renewable energy resources, such as natural gas, petroleum, coal and so on. However, non-renewable energy reserves are depleting and there will be an energy crisis. Conversion of biomass into energy is one solution to overcome this. Indonesia, with its biodiversity, has enormous biomass potential, especially from oil palm plantations and also sugar cane plantations. From the oil palm plantation point of view, oil palm shells and oil palm empty fruit bunches are side products. These wastes can be treated with gasification technology to produce gas fuel. The gasification tool model used in this study is a downdraft gasifier equipped with a cyclone to separate gases with solids or liquids resulting from the gasification process. The results of the gasification process show that the more feeds are introduced, the more syngas is produced during the gasification process. The more feeds, the longer the syngas release time. The two variables have a correlation, that is, between the weight of syngas and the time for syngas removal to increase in line with the addition of the amount of feed entered. Syngas analysis of oil palm empty fruit bunches contains 4.959% H₂ and 5.759% CO. Whereas the analysis of syngas of oil palm shells contained 2.524% H₂, 6.391% CO, and 0.895% CH₄.

Introduction

Along with economic and population growth, the energy demand is always increase yearly in all sectors. So far, national energy needs are met by non-renewable energy resources, such as natural gas, petroleum, coal and so on. The depletion of energy reserves is forcing the Indonesian government and society to look for other alternatives as an energy source.

Indonesia is a tropical country, so it has huge biomass potential. Agriculture and plantation industries such as oil palm plantations, coconut plantations, sugar cane plantations, industrial timber plantations, and produce a lot of biomass waste. Oil palm plantations (*Elaeis guineensis*) is a large source of biomass waste in the form of dry palm waste consisting of oil palm empty fruit bunches and oil palm shells [1].

Empty bunches are the biggest waste compared to other solid wastes. Oil palm empty fruit bunches (EFB) represent waste generated as much as 23% of fresh fruit bunches (FFB) [2]. Most areas in Indonesia produce oil palm. Such as in the areas of Riau, Lampung, Palembang, Aceh, the east coast of Sumatra, Java, Kalimantan, Sulawesi. Most oil palm producing areas do not utilize solid waste from oil palm such as empty fruit bunches, palm shells, and palm leaf.

Oil palm empty fruit bunches are the largest waste produced by oil palm plantations. The number of empty bunches reaches 30-35% [3] of the weight of fresh fruit bunches per harvest. However, until now, the utilization of oil palm empty fruit bunches has not been used optimally. At the palm oil mill, oil palm empty fruit bunches have only been burned and have now been banned due to environmental pollution concerns, or discarded causing complaints / problems because it can reduce the ability to absorb water. In addition, oil palm empty fruit bunches that decompose on the spot will attract the arrival of certain types of beetles that have the potential to damage the rejuvenated oil palm trees in the land around the landfill [4]. The composition of oil palm empty fruit bunches shown in Table 1.

Table 1. Composition of oil palm empty fruit bunches [3]

Component	Dry weight [%]
Ash	6.04
Lignin	15.70
Cellulose	36.81
Hemicellulose	27.01

From Table 1, the main component in oil palm empty fruit bunches are cellulose and hemicellulose. Those components will be converted through gasification process become carbon monoxide, methane, and hydrogen. Carbon monoxide, methane, and hydrogen can be gas fuel.

The shell is a waste produced from the processing of the kernel of the palm kernel with a shape like a coconut shell, having heat from 3500 kcal/kg to 4100 kcal/kg. Palm shells are palm trees with pisifera shell type which are sterile female so that they rarely produce fruit bunches and in the production of superior seeds are used as male elders [1]. With a very large potential, empty fruit bunches and palm shells will be able to meet current energy needs. Several treatments that can be used in processing biomass especially thermal conversion are pyrolysis [5–8] and gasification [9–11]. In this research we used gasification process to convert empty fruit bunches and oil palm shells become gas fuel.

Gasification is defined as the thermo-chemical conversion of carbon-based solid or liquid materials (feedstock) into combustible gas products with a supply of gasification aids in the form of other gases [12]. Thermo-chemical conversion changes the chemical structure of biomass at high temperatures. Gasification aids encourage carbon-based materials to be converted quickly into gas through various heterogeneous reactions [12, 13].

The gasification unit consists of two types of updraft and downdraft. This type of updraft, which experiences a counter-current flow between gas and solid material, is more suitable for the conversion of char (char) which is less reactive to gas. Nearly 90% of the world's coal is classified using this configuration [13, 14]. While the type of downdraft experiences a concurrent flow between the solid material being fed and the gas, which is less flexible for water content and size. However, this type of downdraft is preferred for small scale processes because it provides cleaner gas yields and results in uncomplicated cleaning or purification processes [13].

The main purposes of this research are wanted to know the relationship between weight of materials and weight of syngas produced and the syngas composition that produced through gasification process.

Research Methodology

Research methodology consists of materials used in research, research tools, steps in data retrieval during the gasification process, and gas analysis of the results of gasification.

Research Materials. Materials used in this research are oil palm shells and empty fruit bunches obtained from oil palm plantations in Lampung.

Research Tools. The research tool used in this study is shown in Figure 1. which consists of: a gasification reactor equipped with a cyclone and filter, a blower, a high temperature thermometer and a scale.

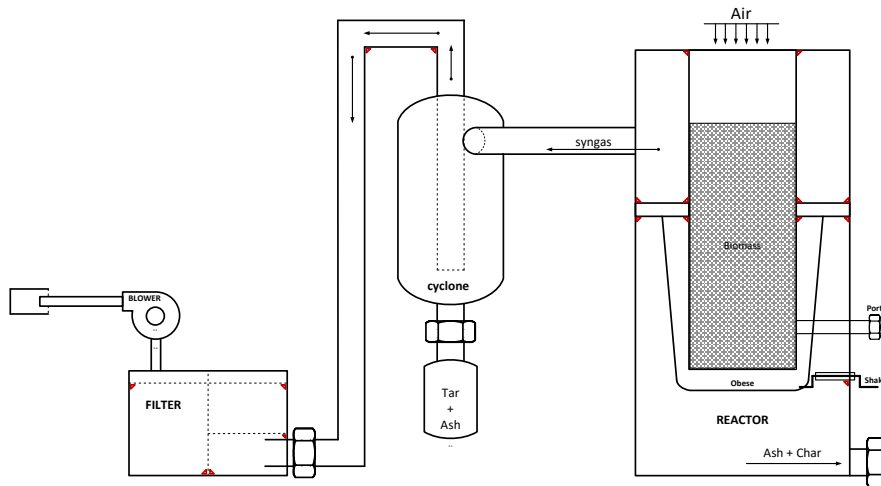


Fig. 1. A series of dry palm waste gasification tools

This biomass gasification research began by preparing biomass raw materials by drying the raw materials under the hot sun followed by reducing the size of the raw materials to 2-4 cm. Weighing biomass using a digital balance.

Biomass gasification begins by introducing biomass feedstock into the gasifier, using blower to drain air into the gasifier. The biomass was ignited through the combustion pit. The temperature recorded every minute during the gasification process.

The final gasification results in the form of gas coming out of the blower, tar which is accommodated under the cyclone and ash mixed with charcoal retained under the gasification reactor. A mixture of ash and charcoal is taken, then weighed and recorded by weight. The gas (syngas) produced is partially taken with a vacuum and put into a sample tube for gas content testing [11].

Results and Discussion

Effect of material weight on the syngas weight produced. In this research, raw materials such as empty fruit bunches and oil palm shells are used. The cellulose content in shells is around 45% and empty bunches around 36.81%. the biomass is put into the gasifier and ignited. The results of combustion in the form of gas and byproducts in the form of tar. If the gas is able to burn when ignited by fire, then this shows that there is syngas in the gasification gas output. To find out the amount of syngas produced, we need some data taken which are the weight of the residual ash and the weight of tar. From these two data we will get the effect of biomass weight on the resulting syngas. The following are data on the effect of the weight of the empty bunches and oil palm shells on the syngas weight presented in graphical form in Fig. 2. and Fig. 3.

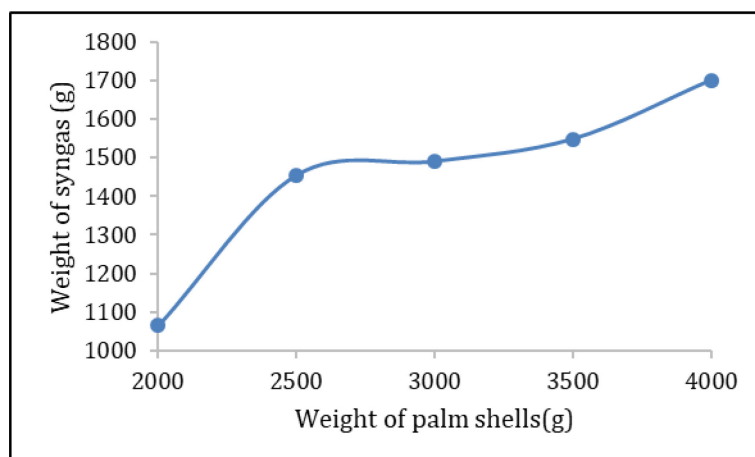


Fig. 2. Correlation between weight of palm shells and weight of syngas produced

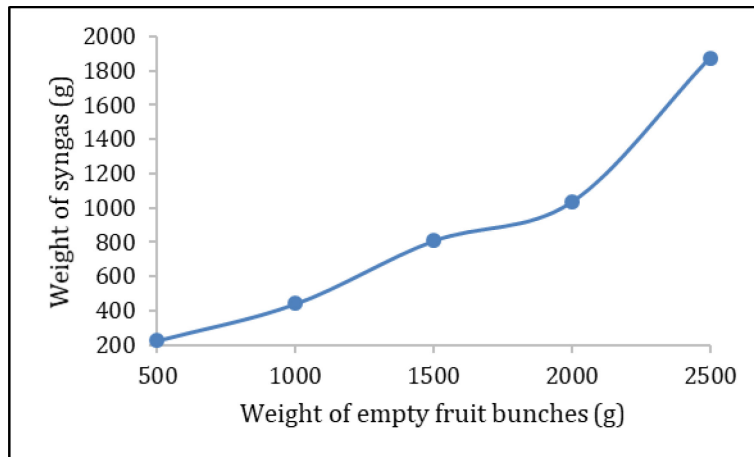


Fig. 3. Relationship between weight of empty fruit bunches and weight of syngas produced

Syngas composition. Gasification is the process of converting solid fuels through combustion with limited air supply to combustible gas in the form of CO, CH₄ and H₂. To determine the concentration of these compounds in the syngas from the gasification of oil palm empty fruit bunches and oil palm shells, sampling was carried out into a 10 ml vacuum tube and gas chromatographic analysis. Following are the results of the syngas analysis on the gasification of oil palm empty fruit bunches and oil palm shells contained in Table 2.

Table 2. Syngas composition

Component	Syngas composition [%]	
	Empty fruit bunches	Oil palm shells
H ₂	2.524	4.959
CO	6.391	5.759
CH ₄	0.895	0

From Table 2. for syngas composition of empty fruit bunches, CO has the highest concentration in the analysis of syngas with a concentration of 5.759% in other words CO has the biggest role in producing flammable or syngas gas. Then, H₂ was 4.959% and there was no CH₄ content in syngas. Based on the analysis, CH₄ at retention time, 3727 minutes can be seen the presence of CH₄ in syngas but the concentration is too small. From these data, it can be seen that CO has the highest concentration in the analysis of syngas with a concentration of 6.391% in other words CO has the biggest role in producing flammable or syngas gas. Then, H₂ is 2.524% and CH₄ content is 0.895%.

Summary

Palm shells and empty fruit bunches are good enough raw materials to be processed by gasification and produce syngas that can ignite when triggered by fire. The results of the gasification process show that the more feeds are inserted, the more syngas is produced during the gasification process. The two variables have synergy, that is, between the weight of syngas and the time for syngas removal to increase in line with the addition of the amount of feed entered. Syngas analysis of oil palm empty fruit bunches contains 4.959% H₂ and 5.759% CO. Whereas the analysis of syngas of oil palm shells contained 2.524% H₂, 6.391% CO and 0.895% CH₄.

References

- [1] N. Kamal. Karakterisasi dan Potensi Pemanfaatan Limbah Sawit. Bandung, 2012.
- [2] M. B. Yunindanova, H. Agusta, and D. Asmono. Pengaruh Tingkat Kematangan Kompos Tandan Kosong Sawit dan Mulsa Limbah Padat Kelapa Sawit terhadap Produksi Tanaman Tomat (*Lycopersicon esculentum* Mill.) pada Tanah Ultisol. Sains Tanah – J. Ilmu Tanah dan Agroklimatologi, 10(2) 91–100, 2013.
- [3] E. Hambali, S. Mujdalipah, A. H. Tambunan, A. W. Pattiwiri, and R. Hendroko, Teknologi Bioenergi. Jakarta: PT AgroMedia Pustaka, 2007.
- [4] H. Roliadi and W. Fatriasari. Kemungkinan Pemanfaatan Tandan Kosong Kelapa Sawit sebagai Bahan Baku Pembuatan Papan Serat Berkerapatan Sedang. J. Penelit. Has. Hutan 23 (2) 101–109, 2005.
- [5] I. N. Azizah, N. P. Sari, and M. Maryudi. Pengaruh Panjang Kolom Distilasi Bahan Isian Terhadap Hasil Produk Cair Sampah Plastik. Chem. J. Tek. Kim 2(1) 21, 2016.
- [6] S. Salamah and A. Aktawan. Pemurnian Hasil Cair Pirolisis sampah plastik pembungkus dengan Distilasi Batch 3 (1) 31–34, 2016.
- [7] Maryudi, S. Salamah, and A. Aktawan. Product distribution of pyrolysis of polystyrene foam waste using catalyst of natural zeolite and nickel/silica. IOP Conf. Ser. Earth Environ. Sci., 175 (1), 2018.
- [8] I. Mufandi, W. Treedet, P. Singbua, and R. Suntivarakorn. Produksi Bio-Oil dari Rumput Gajah dengan Fast Pyrolysis menggunakan Circulating Fluidized Bed Reactor (CFBr) dengan Kapasitas 45 Kg/H. Chem. J. Tek. Kim. 5 (2) 37, 2019.
- [9] Si. Maryudi; Aktawan, Agus; Salamah. Jurnal Bahan Alam Terbarukan Conversion of Biomass of Bagasse to Syngas through Downdraft Gasification. J. Bahan Alam Terbarukan, 7(1) 28–33, 2018.
- [10] A. Nurwidayati, P. A. Sulastri, D. Ardiyati, and A. Aktawan. Gasifikasi Biomassa Serbuk Gergaji Kayu Mahoni (*Swietenia Mahagoni*) untuk Menghasilkan Bahan Bakar Gas sebagai Sumber Energi Terbarukan. Chem. J. Tek. Kim. 5 (2) 67, 2019.
- [11] A. Aktawan, M. Maryudi, and S. Salamah. Biomass conversion of tamarind waste to syngas through gasification process on downdraft gasifier. IOP Conf. Ser. Mater. Sci. Eng., vol. 674, pp. 1–6, 2019.
- [12] V. Belgiorno, G. De Feo, C. Della Rocca, and R. M. A. Napoli. Energy from gasification of solid wastes. Waste Manag., 23 (1) 1–15, 2003.
- [13] C. Di Blasi. Dynamic behaviour of stratified downdraft gasifiers. Chem. Eng. Sci. 55 (15) 2931–2944, 2000.
- [14] M. L. Hobbs, P. T. Radulovic, and L. D. Smoot. Combustion and gasification of coals in fixed-beds. Prog. Energy Combust. Sci. 19 (6) 505–586, 1993.