

INTERNATIONAL SEMINAR ON CHEMICAL ENGINEERING “SOEHADI REKSOWARDOJO 2011”



- PROCEEDING -



Theme: Bioenergy, Biobased Product and Process Development

Aula Barat & Aula Timur ITB
Bandung, Indonesia • 5 - 7 October 2011



PT PUPUK SRIWIDJAJA (Persero)



PROCEEDING

International Seminar on Chemical Engineering Soehadi Reksowardojo 2011

Edited by:

Dr. Irwan Noezar
Dr. Yogi Wibisono Budhi
Dr. Ronny Purwadi
Dr. Melia Laniwati
Dr. MTAP Kresnowati
Dr. Tirto Prakoso

Department of Chemical Engineering
Faculty of Industrial Technology
Institut Teknologi Bandung

In corporation with

Indonesian Association of Chemical Engineering Departments
(APTEKINDO)
Indonesian Institution of Engineers, Chemical Engineering Chapter
(BKK-PII)

ISBN 978-979-98300-1-2

International Seminar on Chemical Engineering Soehadi Reksowardojo 2011

Table of Contents

Category	Title
APC-01	The Effect Of Emulsifier To Methyl Ester Sulfonate As Chemical Flooding Material
APC-02	Modified SIs With Epoxide From Oleic Acid And Hydrogen Peroxide In Order To Increase The Surfactant's Qualities For Eor
BPE-01	Optimasi Proses Produksi Biodiesel Dari Mikroalga Jenis Chlorella Dengan Metode <i>Central Composite Design</i>
BPE-02	Optimization Of Production Penicillin Acylase By <i>Escherichia Coli</i>
BPE-03	Crude Selulase Production From Phanerochaete Chrysosporium By Using Hardwood As A Media
BPE-04	Initial Study Biosensors Ferrooxidans Immobilized For Measurement Ascorbic Acid
BPE-05	Palm Oil Mill Effluent (Pome) Utilization For Protein Production Of Spirulina
BPE-06	Effect Time Of Feeding Volatile Fatty Acids From Palm Oil Mill Effluent (Pome) To Production Of Polyhydroxyalkanoat (Pha) By <i>Ralstonia Eutropha</i>
BPE-07	Development Of Bioreactor For Stem Cell Applications: Measuring Stem Cell Concentration In Bioreactor
BPE-08	Steel Corrosion Rate By Sulfate Reducing Bacteria From Lapindo Mud
BPE-09	Production Of Glycerol 3-Phosphate Using Thermococcus Kodakaraensis Kod1 Glycerol Kinase And In Vitro Atp-Regenerating System Of Thermus Thermophilus Hb27 Polyphosphate Kinase
BPE-10	Preliminary Study Of Biotransformation Of Aldehyde And Ketone By Clostridium Saccharoperbutylaceticum N1-4
BPE-11	Rice Bran Oil Processing From Ir64 Rice Bran By Fermentation With Yeast
BPE-12	Intensifikasi Proses Tanaman: Meningkatkan Produktivitas Dan Kualitas Produk Tanaman Dengan Pengembangan Bioreaktor Tanaman
CRE-01	Studi Kinetika Pembukaan Cincin Oksiran Pada Epoksi Jarak Pagar Dengan Metanol Dan Identifikasi Poliol
CRE-02	Hydrocarbon Gasoline Fraction From Jatropha Oil Via Alkali -Saponification And Catalytic Cracking Using B_2O_3/Al_2O_3 Catalyst
CRE-03	Karakterisasi Katalis Heterogen Arang Aktif Tersulfonasi Untuk Hidrolisis Selulosa Menjadi Glukosa
CRE-04	Biodegradable Polymer From Carbonylative Polymerization Of Undecenol Using Cobalt Phosphine Complexes

CRE-05	Synthesis Of Bioetbe: The Advantage Of Solid Acid Catalyst Fo Synthesis A New Component Of Gasoline
CRE-06	Determination Of Kinetic Rate Of N-Hexane Oxidation Over Pt/ Γ -Al ₂ O ₃ In A Fixed Bed Reactor
CRE-07	Effect Of Process Conditions On The Characteristics Of Carbon Nanotubes By Catalytic Decomposition Of Methane Over Ni-Cu-Al Catalyst
CRE-08	Effect Of Temperature On Ethanol Electro-Oxidation On Carbon Supported Pt, Ptru And Ptsn Catalysts
CRE-09	Hydrogren Peroxide Study On Photocatalytic Decolourization Of Reactive Orange 16 Dye
CRE-10	Ceramic Membrane Contactor To Recover Iodine From Brine Water
CRE-11	Evaluation Kinetics Of Hydrodesulfurization Dibenzothiophene Using Nimo / Γ -Al ₂ O ₃ Catalyst
CRE-12	Characterization Of Γ -Alumina Catalyst Support Prepared From Belitung Kaolin
CRE-13	Determining Rate Parameters Of Langmuir-Hinselwood Type Kinetics For Methane Oxidation Over Pt/ Γ -Al ₂ O ₃ In A Fixed Bed Reactor
DSC-01	Cfd Modeling Of High Performance Vane – Cyclone Mist Eliminator
DSC-02	Dynamic Modeling For Propylene Homopolymerization In Industrial Loop Reactors
DSC-03	Performance Evaluation Of Multicomponent Distillation Control System Using Steady State And Dynamic Process Modelling Case Study: Debutanizer Column
DSC-04	Dynamic Simulation Of Anti Surge Control For Two Stage Centrifugal Gas Compressor
DSC-05	Computer Aided Product Design Of Green Diesel From Biofuels
DSC-06	Scaled D-Optimal Design A Novel Approach For Improving Parameter Precision
DSC-07	Tuning Method Application Of Level Controller In Process Control Laboratory, Chemical Engineering Department, Politeknik Negeri Malang
DSC-08	Control Strategy For Outlet Temperature Of Heat Exchanger Networks By Using Pid And Mpc
DSC-09	Geometry Effects Of Upstream Conditions On The Internal Flow Characterictics In Shell And Tube Heat Exchanger
DSC-10	Simulation Process Water Treatment For Boiler
DSC-11	Supply Chain Modeling And Control System Design Of Fuel Oil Transfer Through Pipeline
DSC-12	Design And Control A Methanol Synthesis Process In A Multi Tube Plug Flow Reactor With Recycle Using Pi, Pid Controllers And Mpc

DSC-13	Simulation And Optimization Of Coupling Reaction Of Methanol Synthesis And Isopropyl Alcohol Dehydrogenation
EDU-01	Tanggapan Pendidikan Teknik Kimia Terhadap Perkembangan Perancangan Produk Kimia
EDU-02	A Chemical Engineering Laboratory Module On Soap Production
EDU-03	Teaching Chemical Product Design ar Universitas Indonesia
EST-01	Application Of Biofilm System In Treating Palm Oil Mill Effluent (Pome)
EST-02	A Feasibility Study Of Pome Pretreatment Using Wild Algae
EST-03	Index Based Inherent Safety Aessment At Early Stage Of Process Design
FST-01	Alternative Method Using Co2 For Tofu Perservation
KEY-01	Oleochemical Products
KEY-02	Current Status And Issues Of Biofuels
MST-01	Aluminum Corrosion In Citric Acid Solution
MST-02	An Experience Of Scalling-Up Paste Glue Production Of Gummed Tape From Laboratory Scale Experimental Data
MST-03	Physical Characteristics Of Biodegradable Foam From Mixed Hominy Feed And Cassava Starch
MST-04	Synthesis And Characterization Of Natrium Lignosulfonate
MST-05	Natural Rubber Powder Production From Latex: Equipment Design And Modeling
MST-06	Synthesis And Characterization Of Cellulose Based Superabsorbent Polymer Composites
MST-07	Development Of Non Petroleum Base Low lft Surfactant For Improving Oil Recovery
MST-08	Accelerated Chamois Leather Tanning Process Using Hydrogen Proxide As An Oxidizing Agent
MST-09	Factorial Design Analysis Of Compost Granulation
MST-10	Structure-Property Relationship In Layered-Silicate / Flexible Polyrethane Foam Nanocomposite
MST-11	Utilization Of <i>T.Ferrooxidans</i> Bacteria Activity In Producing Bioelectricity With Membrane Technology
POS-01	Accelerated Chamois Leather Tanning Process Using Oxidizing Agent

POS-02	The Process Of Analyzing Cu Is A Solution On Toward A Green Chemistry
POS-03	Pengembangan Model Pembelajaran Praktikum Kimia Melalui Dry Lab Pada Pembelajaran Jarak Jauh
RET-01	Degradation Of Biodiesel During Storage According To Total Acid Number And Viscosity
RET-02	Production Of Biohydrogen From Synthetic Tapioca Wastewater In Anaerobic Process
RET-03	Characteristic Of Gas-Liquid Contactor For Absorption Of Toluene Using Oils
RET-04	Measurement Of Auto-Oxidation Kinetics Of Methyl Oleate-Methyl Laurate Mixture As A Biodiesel Model System
RET-05	Enzymatic Hidrolisis Of Rice Straw With Alkaline Pretreatment For Hidrogen Production
RET-06	Producing Absolute Ethanol With Distilation And Adsorbtion By Molecular Sieve 3a
RET-07	Production Of Biodiesel By Enzymatic Transesterification Via Non-Alcohol Route Using Immobilized Biocatalyst In Column Technology Packed
RET-08	Proses Produksi Etanol Grade Bahan Bakar Dengan Proses 'Wet Adsorption-Distilation'
RET-09	Biohydrogen Technological Innovation Into Electrical Energy By Fuel Cell Technology
RET-10	Biomass To Liquid In Indonesia: Ft-Fuel Or Methanol
RET-11	Biogas Production From Glycerol Derived From Biodiesel Manufacturing
RET-12	Transformation Of Jatropha Seed To Biodiesel By In Situ Transesterification
RET-13	Biodiesel Production From Palm Fatty Acid Distillate (Pfad) Using Reactive Distillation
RET-14	The Stability Of Coal-Oil Mixtures As An Alternative Fuel Oil Using Dimensionless Number Analysis
RET-15	Determination Of Minimum Trace Metals (Nickel And Cobalt) Requirements For Obtaining Optimum Biogas Production In The Fermentation Of Palm Oil Mill Effluent
RET-16	Studies On The Reaction Kinetics Of Anaerobic Fermentative Hydrogen Production By Enterobacter Aerogenes
RET-17	Preparation, Characterization, And Activation Of Catalyst NiO/Al ₂ O ₃ For Synthesis Of Diesel-Like Hydrocarbon From Jatropha Oil Through Catalytic Pyrolysis
RET-18	Esterification Of Palm Fatty Acid Distillate With Ethanol
RET-19	Natrium Hydroxide (Naoh) As Alkaline Hydrolysis On Pretreatment Of Biogas Production From Water Hyacinth (<i>Eichornia Crassipes</i>)
RET-20	Closed Loop Double Stage Husk <i>Jatropha</i> digester

RET-21	Conversion Of Whey From Tofu Into Biogas By Anaerobic Batch Process
RET-22	Effect Of Blending Among Biodiesels On The Properties Of Oxidation Stability
RET-23	Drying And Pyrolysis Of Kraft Pulp Mill's Sludge Cake
RET-24	Steaming And Enzymatic Hydrolysis Of Empty Palm Oil Fruit Bunch To Produce Monosaccharides
RET-25	Biorefinery Preliminary Studies: Integration Of Slurry And Co2 Gas As Biomethane Digester Waste For Microalgae Scenedesmus Sp. Growth.
RET-26	The Hydrothermal Treatment For Production Of Solid Biofuel From Sugarcane Bagasse
SPT-01	Removal Of Ammonia Concentration (Nh4+-N) In Leachate Using Packed Column Stripping Process For Biogas Raw Material
SPT-02	Vapour-Liquid Equilibrium Study For Benzene And Several Types Of Oil As Absorbent
SPT-03	Cfd Turbulence Model Of Tangential Cylindrical Cyclone For Droplets Removal From Gas Streams
SPT-04	Performance Of Slotted Pore Microfiltration Membrane To Separate Oil From Water
SPT-05	Bench- And Pilot-Scale Evaluation Of Co2 Removal From Natural Gas Stream Using Polypropylene (Pp) Hollow Fiber Membrane Contactors
SPT-06	Combination Of Ozonation And Absorption Through Membrane Processes To Remove Ammonia From Wasterwater
SPT-07	Recent Development And Potential Applications Of Electrodeionization (Edi)
SPT-08	Improvement Of Selectivity And Permeation Properties Of Ultrafiltration Membrane For Humic Acid Water Treatment : A Review
SPT-09	Trimethylamine Removal From Pure Methanol Using Ion Exchange Resin
SPT-10	Room Temperature Ionic Liquids For Propyne-Propylene Separations: Theoretical And Experimental Investigation
SPT-11	Pengaruh Suhu Dan Waktu Pengeringan Film Lateks Karet Alam Menggunakan Tepung Kulit Pisang Sebagai Pengisi
SPT-12	Intensification Of Bioproducts Purification: A Perspective On Hydrolysis Of Lactate Esters
SPT-13	Study On The Effect Of Moisture Content And Material Size Of Vetiver On The Yield And Quality Of Vetiver Oil (Vetiveria Zizanoides L.)
SPT-14	Purification Process Of Tofu Waste Water Factory
SPT-15	Produced Water Management Using Membrane Technologies

Rice Bran Oil Processing from IR64 Rice Bran by Fermentation with Yeast

Endah Sulistiawati and Dwi Suhartanti

Chemical Engineering Study Program, University of Ahmad Dahlan
Biology Study Program, University of Ahmad Dahlan
UAD Campus III, Jl. Prof. Soepomo, Janturan, Warungboto, Yogyakarta 55164
Tel. (0274) 563515, Fax.(0274)564604
Email: endah100@yahoo.com

Abstract. In the rice milling process, a byproduct obtained in the form of bran (8-12%) which is the epidermis. Rice bran contains 10-13% oil, with the content of unsaturated fatty acids are high (80 percent). One way to enhance the benefits of bran is to separate the oil to be used as cooking oil. The objective of this research was determining the optimum condition for producing rice bran oil by fermentation.

Fifty grams of rice bran was added with 50 ml of warm water, then added yeast as the ratio (1:1:0.1; w: v: w), incubated during 21 hours. After the fermentation process completed, all the materials were added with 50% ethanol, filtered, then distilled.

This research concluded that the optimum condition for producing the rice bran oil is fermented with bread yeast during 21 hours, which was 26.882 g of 50 g bran, 2.5 times better than the control (without yeast) which produce only 10 g of oil. Second oil gained was 24.913 g of bran using tempeh yeast.

Keywords: *bread yeast, IR 64, rice bran oil, tape yeast, tempeh yeast.*

1 Introduction

In the process of a rice mill grinder, a byproduct obtained in the form of bran 8-12% which is the cuticle. Besides these results actually have a use-value and economic well if handled with care to increase the value added in agro-industry system of rice in the countryside. Bran oil contains 10-13 percent achieved by the content of unsaturated fatty acids are high at 80%.

Rice bran oil [synonyms: Rice oil; *Oryza sativa* L] means the oil derived from the layers around the endosperm of rice. Making process of rice bran oil still using conventional methods of solvent extraction, or heating such as by making the process of other cooking oil (for examples: palm oil, soybean oil, coconut oil) [3]. Although there is another way of provocation by the VCO used in the making, it is necessary to do the process of making rice bran oil by using services microorganisms especially yeast, so that the quality and quantity of rice bran oil obtained will be better [5].

Pure coconut oil processing performed by the Philippine community with traditional fermentation methods, the way fermented for 24-36 hours, and laboratory testing showed that pure coconut oil is very high quality of Lauric acid containing about 50-55% [5].

Microbes have a significant role of the cell can be utilized in the field of biotechnology and activities as well as compounds produced components can be utilized. Some of

microorganism produces microbial enzymes. There are several microorganisms that have a useful enzyme to break down complex compounds such as polysaccharides, proteins, and fats. Leaven bread is the main source of supply of the enzyme invertase, maltase, and protease zymase [4]. Enzyme-producing microbes can separate or break the protein in organic materials that contain oil. Enzymatic manufacturing process can be done with a simple way, namely by making use of microbes in tempeh yeast [7].

Jahani et.al have researched the response surface methodology, was used to determine the optimum processing conditions for enzymatic degumming of rice bran oil. Reaction time, enzyme dosage, level of water added and temperature were the factors investigated with respect to phosphorus and free fatty acids contents. Applying desirability function method, optimum operating conditions were found to be reaction time of 4.07 h, enzyme dosage of 50 mg/kg, added water of 1.5 ml/100 g and temperature of 49.2 °C. At this optimum point, phosphorous and free fatty acids contents of degummed oil were found to be 8.86 mg/kg and 2.01 g/100 g as oleic acid, respectively [8].

2 Research Methods

The raw materials in this research were rice bran type of IR64, bread yeast, tape yeast, tempeh yeast, and aquadest. The materials used for the analysis of Saponification Value and Free Fatty Acid were KOH, alcohol, phenolphthalein indicator (pp), and NaOH.

Fifty grams of rice bran was added with 50 ml of warm water (aquadest), then added yeast as the ratio (1:1:0,1; w: v: w), incubated during 21 hours, at room temperature and neutral pH. After the fermentation process completed, all the materials were added with 200 ml of 50% ethanol, were mixed well and afterwards filtered. After filtering the mixtures, the filtrate that contains oil, alcohol, and water were distilled at 78°C temperature to separate the alcohol from oil and water mixture. The mixture of oil and water were dried in oven at 110°C until constant weight to obtain the crude rice bran oil (RBO). Then, RBO were analyzed saponification value (SV) and free fatty acid (FFA) content.

3 Results and Discussion

Rice bran was fermented by three kinds of yeast. There were Bread yeast, Tempeh yeast, and Tape yeast. The time of fermentation was 21 hours, at room temperature and neutral pH. After all the processes finished, the results of rice bran oil was measured, in grams. All results as shown in the table 1 and figure 1.

Rice Bran Oil Processing from IR64 Rice Bran by Fermentation with Yeast

Table 1 Rice bran oil results (in grams) from IR64 rice bran by fermentation with yeast (fermentation time 21 hours, room temperature, neutral pH)

Yeast	Sample			Mean
	1	2	3	
Control	10.7	9.2	10.1	10
Bread yeast	28.366	27.136	25.144	26.882
Tempeh yeast	25.438	24.813	24.488	24.913
Tape yeast	21.069	22.014	21.474	21.519

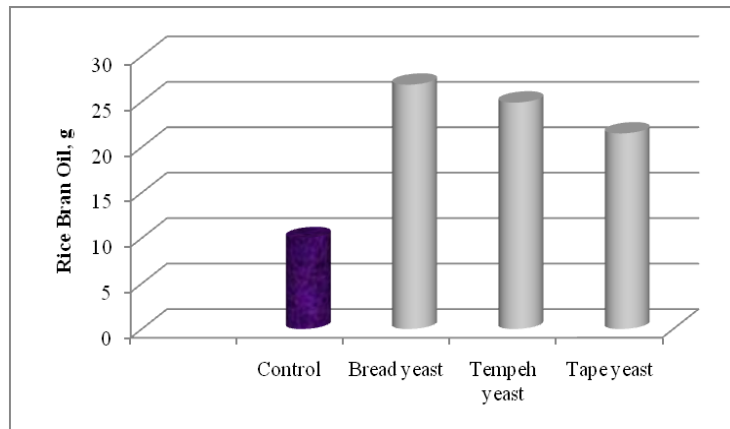


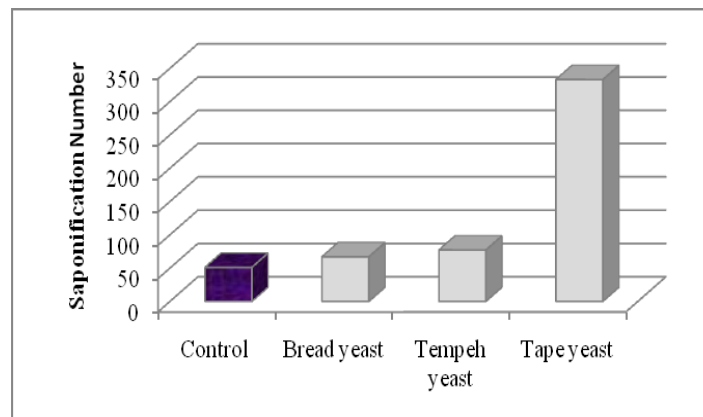
Figure 1 Rice bran oil result (g)

Figure 1 shows that the most rice bran oil is produced bread yeast. The control of 50 g rice bran gave average yields only 10 g of oil. Leaven bread is the main source of supply of the enzyme invertase, maltase, and protease zymase [4]. Protease enzyme produced by bread yeast will describe proteins that surrounded the oil molecules, so the oil can be produced more. Enzyme-producing by microbes that can separate or break the protein in organic materials contain oil. Enzymatic manufacturing process can be done with a simple way, namely by making use of microbes in tempeh yeast [7]. Fermentation process is influenced by the type of microbes and substrate used [2,5].

The Saponification Value of crude RBO was analyzed, in mg KOH/g oil. The results can be shown as the table 2 and figure 2. According to Codex [9], the Saponification Value of commercial RBO is in the range 180-199 mg KOH/g oil. So, crude RBO from this research was out of the range. In the next time, it needs purifying of crude RBO.

Table 2 Saponification Value (SV) of crude RBO using the three kinds of yeast (fermentation time 21 hours, room temperature and neutral pH)

Yeast	Sample			Mean SV, (mg KOH/ g oil)
	1	2	3	
Control				51.12
Bread yeast	67.712	66.187	66.966	66.955
Tempeh yeast	77.657	77.032	76.614	77.101
Tape yeast	333.611	332.957	332.543	333.037

**Figure 2** Saponification Value of crude RBO using the three kinds of yeast

From Figure 2 it appears that the highest Saponification Value is resulted from fermentation by tape yeast, the number was 333.077. In the tape yeast, there is a mix of microbial populations, in which there are species of the genus *Aspergillus*, *Saccharomyces*, *Candida*, *Hansenula*, and the bacteria *Acetobacter*. The genus live together in synergy in the fermentation of rice bran [1,2]. Oil fermentation can be done by using enzymes or by microbes inoculum that produces the protease enzyme. Enzymes is necessary to hydrolyze proteins or damaging surrounding globula fat, and macromolecules that bind cellulose especially globula fat, hemicellulose, and pectin. These enzymes, among others can be obtained from bread yeast, tempeh yeast, and tape yeast.

Table 3 Free fatty acid of resulted RBO

Yeast	Sample			Mean FFA, %
	1	2	3	
Control				11.10
Bread yeast	5.59	5.77	5.81	5.26
Tempeh yeast	6.49	6.54	6.72	6.58
Tape yeast	9.62	9.83	9.79	9.75

Rice Bran Oil Processing from IR64 Rice Bran by Fermentation with Yeast

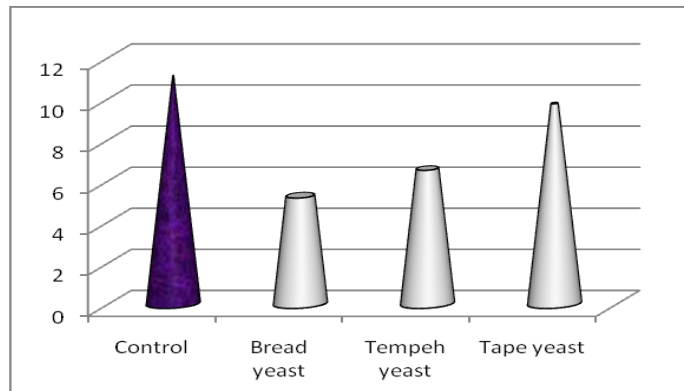


Figure 3 Free Fatty Acids numbers of rice bran oil produced using yeast fermentation

Figure 3 shows that the highest FFA in RBO was contained in rice bran oil control (with no yeast treatment). The lowest FFA was contained in RBO from bread yeast fermentation, 5.26%. In wheat germ oil, the free fatty acid (FFA) content of the crude oil is usually very high and quite variable (5–25% is typical), depending upon the conditions of germ separation, germ storage, and oil extraction. FFA often contributes to bitter and soapy flavor in food. Wheat germ oil is usually dark-colored and may have strong odor and flavor depending on the oxidative condition of the oil. Therefore, it is desirable to remove FFA as much as possible [6]. The crude RBO from this research had dark color, and it needed purifying. The research of Jahani et al. that used enzymatic degumming process gave free fatty acids contents of degummed oil was 2.01 g/100 g as oleic acid [8].

4 Conclusion

From this research, it was concluded that the best condition for producing the rice bran oil was fermentation with bread yeast during 21 hours (at room temperature and neutral pH), which resulted 26.882 g of 50 g bran. It was 2.5 times better than the control (without yeast) which produced only 10 g of oil. The second oil gained was 24.913 g of RBO using tempeh yeast. The third was 21.519 g using tape yeast. The highest saponification value was obtained by fermentation with tape yeast. The lowest FFA was fermentation using bread yeast.

5 References

- [1] Atlas, R.M., *Principles of Microbiology*, 2 ed, pp. 820-827, Wm.C. Brown Publishing, Tokyo, 1996.
- [2] Dwidjoseputro, "Dasar-Dasar Mikrobiologi", ed 13. pp.146-155, Penerbit Djambatan, 1998.
- [3] Hadipernata, M., *Mengolah Dedak Menjadi Minyak (Rice Bran Oil)*, Warta Penelitian dan Pengembangan Pertanian, **29** (4), 8-11, 2007.
- [4] Medicafarma, *Yeast*, <http://medicafarma.blogspot.com/2008/06/pembuatan-ragi.html>, (2008).
- [5] Suhartanti, Dwi, *Panduan Praktis Pembuatan VCO Menggunakan Modifikasi Metode Antara Penggojokan dan Pancingan*, Unit Transfer Teknologi UAD-Dirjen

- Dikti, Yogyakarta, 2006.
- [6] Wang, T., and Johnson, L.A., *Refining High-FreeFatty Acid Wheat Germ Oil*, JAOCS, **78**(1), 71-76, 2001.
- [7] Yunandar, *Membuat Virgin Coconut Oil dengan Ragi Tempe*, STPP Manokwari <http://www.stpp-manokwari.ac.id>, (2006).
- [8] Jahani , M., Alizadeh, M., Pirozifard, M., and Qudsevali, A., *Optimization of enzymatic degumming process for rice bran oil using response surface methodology*, Food Science and Technology, **41**(10), 1892-1898, 2008.
- [9] Codex, *Codex Standards for Named Vegetable Oils*, www.codexalimentarius.net/.../CXS_210e.pdf (September 2011).

Acknowledgments

On this occasion the author would like to thank to DP2M-Higher Education which has provided Competitive Grant funding for this research.