eecsi 2018

Organizer:

UMM
UNIVERSITAS MUHAMMADIYAH MALANG

Sponsored by:

RISTEKDIKTI

Technical Co.Sponsorship:

IEEE
INDONESIA SECTION

PROCEEDING

2018 5th International Conference on Electrical Engineering, Computer Science and Informatics

Indexed by:

Scopus®

October
16 - 18, 2018

Ijen Suites
Resort & Convention
Malang, Indonesia

Co.Organizers:

Universitas Diponegoro Semarang

Universitas Ahmad Dahlan

Universitas Islam Sultan Agung UNISSULA

iaes
Institute of Advanced Engineering and Science

UTM
UNIVERSITI TEKNOLOGI MALAYSIA

PROCEEDINGS

2018 5th International Conference on Electrical Engineering, Computer Science and Informatics (EECSI 2018)

16-18 October 2018, Malang, Indonesia

Editors:
Anton Yudhana, Universitas Ahmad Dahlan, Yogyakarta, Indonesia
Zulfatman, Universitas Muhammadiyah Malang, Indonesia
Deris Stiawan, Universitas Sriwijaya, Palembang, Indonesia
Munawar A. Riyadi, Universitas Diponegoro, Semarang, Indonesia
Imam Much Ibnu Subroto, Universitas Islam Sultan Agung, Semarang, Indonesia
Agus Eko Minarno, Universitas Muhammadiyah Malang, Indonesia
Christian Sri Kusuma Aditya, Universitas Muhammadiyah Malang, Indonesia

PROCEEDINGS

2018 5th International Conference on Electrical Engineering, Computer Science and Informatics (EECSI 2018)

ISBN : 978-1-5386-8401-6 (USB, Part Number : CFP18B51-USB)
ISBN : 978-1-5386-8400-9 (DVD, Part Number : CFP18B51-DVD)
ISBN : 978-1-5386-8402-3 (XPLORE COMPLIANT, Part Number : CFP18B51-ART)

Additional copies may be ordered to:
Lembaga Pengembangan Publikasi Ilmiah (LPPI)
Universitas Muhammadiyah Malang
Gedung Perpustakaan Pusat UMM, Jl. Raya Tlogomas No. 246, Malang, 65144.
+62341-464318 Ext. 243

ORGANIZING COMMITTEE OF EECSI 2018 CONFERENCE

Steering Committee

- Adam Skorek, IEEE MGA Awards and Recognation Chair (R7) Trois-Rivières, QC, Canada
- Pekik Argo Dahono, IEEE Indonesia Chapters Chair (EdSoc/EDS/PELS/SPS)
- Mochamad Ashari, Telkom University, Bandung, Indonesia
- Tumiran, Universitas Gadjah Mada, Yogyakarta, Indonesia
- Hermawan, Universitas Diponegoro, Semarang, Indonesia
- Zainudin Nawawi, Universitas Sriwijaya, Palembang, Indonesia
- Rahmat Budiarto, Albaha University, Baha, Saudi Arabia
- Sri Arttini Dwi Prasetyowati, Universitas Islam Sultan Agung, Semarang, Indonesia
- Kartika Firdausy, Universitas Ahmad Dahlan, Yogyakarta, Indonesia
- Siti Nurmaini, Universitas Sriwijaya, Palembang, Indonesia
- Ahmad Mubin, Universitas Muhammadiyah Malang, Indonesia

General Chair

- Tole Sutikno, IAES Indonesia

Finance Chairs and Treasurer

- Wiwiek Fatmawati, Universitas Islam Sultan Agung, Semarang, Indonesia
- Lailis Syafa'ah, Universitas Muhammadiyah Malang, Indonesia
- Lina Handayani, Universitas Ahmad Dahlan, Yogyakarta, Indonesia

Program Chairs

- Deris Stiawan, Universitas Sriwijaya, Palembang, Indonesia
- Mochammad Facta, Universitas Diponegoro, Semarang, Indonesia
- Agus Eko Minarno, Universitas Muhammadiyah Malang, Indonesia
- Machmud Effendy, Universitas Muhammadiyah Malang, Indonesia
- Fauzi Sumadi, Universitas Muhammadiyah Malang, Indonesia
- Christian Sri Kusuma Aditya, Universitas Muhammadiyah Malang, Indonesia

General Co-Chair

- Zulfatman, Universitas Muhammadiyah Malang, Indonesia
- Anton Yudhana, Universitas Ahmad Dahlan, Yogyakarta, Indonesia

Publication Chairs

- Munawar A. Riyadi, Universitas Diponegoro, Semarang, Indonesia
- Balza Achmad, Universitas Gadjah Mada, Yogyakarta, Indonesia
- Yuda Munarko, Universitas Muhammadiyah Malang, Indonesia
- Wahyu A. Kusuma, Universitas Muhammadiyah Malang, Indonesia

Publicity Chairs

- Imam Much Ibnu Subroto, Universitas Islam Sultan Agung, Semarang, Indonesia
- Maskur, Universitas Muhammadiyah Malang, Indonesia
- Son Ali Akbar, Universitas Ahmad Dahlan, Yogyakarta, Indonesia
- Sam F. Chaerul, Universitas Islam Sultan Agung, Semarang, Indonesia
- Ahmad Heryanto, Universitas Sriwijaya, Palembang, Indonesia

TECHNICAL PROGRAM COMMITTEE

Munawar Riyadi	Diponegoro University	Indonesia
Deris Stiawan	University of Sriwijaya	Indonesia
Rahmat Budiarto	Al-Baha University	Saudi Arabia
Nik Rumzi Nik Idris	Universiti Teknologi Malaysia	Malaysia
Haleh Aghajani	Baylor Scott & White Health	USA
Wassim Alexan	German University in Cairo	Egypt
Humaira Anwer	National University of Sciences & Technology, Islamabad	Pakistan
Mahdi Baradarannia	University of Tabriz	Iran
Zesheng Chen	Purdue University Fort Wayne	USA
Deniz Dal	Ataturk University	Turkey
Abubaker Gaber	University of Technology Malaysia	Malaysia
Maxime Leclerc	Thales Canada Inc	Canada
Mingkang Li	Robert Bosch GmbH	Germany
Xian Li	Southeast University	P.R. China
Chih-Chin Liang	National Formosa University	Taiwan
Agus Minarno	Universitas Muhammadiyah Malang	Indonesia
Davood Mohammadi	Khorasan Regional Electrical Company	Iran
Chressen Much	Universitätsklinikum Eppendorf	Germany
Maurice Ntahobari	Institut Teknologi Sepuluh Nopember	Indonesia
Naveed Sabir	Mehran University Of Engineering & Technology, Jamshoro	Pakistan
Abdulqawi Saif	Université de Lorraine	France
Steffen Späthe	Friedrich-Schiller-University Jena	Germany
Robert Szabolcsi	Óbuda University	Hungary
Amin Torabi Jahromi	Persian Gulf University	Iran
S Zafaruddin	Bar-Ilan University	Israel
Mudrik Alaydrus	Universitas Mercu Buana Jakarta	Indonesia
Mohammed Alghamdi	Al-Baha University	Saudi Arabia
Harikumar Rajaguru	Bannari Amman Institute of Technology	India
Ali Tekeoglu	SUNY Polytechnic Institute	USA
Ameur Bennaoui	University of Science and Technology (USTO)	Algeria
Ashish Tanwer	Stony Brook University	USA
Haikal Satria	Universiti Teknologi Malaysia	Malaysia
Paolo Crippa	Università Politecnica delle Marche	Italy

LIST OF REVIEWERS

Abdel Ghani Aissaoui	University of Bechar	Algeria
Abdelfatteh Haidine	ENSA El Jadida - University Chouaib Doukkali	Morocco
Abdualah Aljankawey	University of New Brunswick	Canada
Abdulfattah Noorwali	University of Western Ontario	Canada
Abdullah Alomari	Albaha University	Saudi Arabia
Abhijeet Kumar	Pune Insitute of Computer Technology	India
Abul Bashar	Prince Mohammad Bin Fahd University	Saudi Arabia
Adrian Kliks	Poznan University of Technology	Poland
Adrian Tam	Clarity Solutions Group	USA
Ahmed Abotabl	Samsung Semiconductors Inc.	USA
Ajay Dadhich	Govt. Engineering College Ajmer	India
Aji Wibawa	Indonesia	Indonesia
Akbar Sheikh-Akbari	Leeds Beckett University	United Kingdom
Akhil Gupta	Lovely Professional University	India
Alain Richard Ndjiongue	University of Johannesburg	South Africa
Albert Alexander	Kongu Engineering College	India
Alexander Sergienko	St.-Petersburg Electrotechnical University	Russia
Ali Al Janaby	University of Mosul	Iraq
Ali Tekeoglu	SUNY Polytechnic Institute	USA
Alon Slapak	RodRadar	Israel
Ameur Bennaoui	University of Science and Technology (USTO)	Algeria
Amin Aeenmehr	Production Technology Research Institute	Iran
Amin Torabi Jahromi	Persian Gulf University	Iran
Amit Kumar	Galgotias University	India
Amiza Rasmi	TM Research & Development	Malaysia
Amrit Mukherjee	Jiangsu University	P.R. China
Andang Sunarto	Fakultas Ekonomi dan Bisnis Islam, IAIN Bengkulu	Indonesia
Andrea Vicenzutti	University of Trieste	Italy
Andrew Lowe	Auckland University of Technology	New Zealand
Andrews Samraj	Mahendra Engineering College	India
Antonio Oliveira-Jr	Federal University of Goias	Brazil
Anupama Kowli	IIT Bombay	India
Archana Shinde patil	Rajarambapu Institute Of Technology, Rajaramnagar	India
Arshad Muhammad	Sohar University	Oman
Arvind Singh	University of Pretoria	South Africa
Asaad Elmoudi	Red River College	Canada
Aseel Ajlouni	University of Jordan	Jordan
Ashish Kumar	Manipal University Jaipur	India
Ashish Tanwer	Stony Brook University	USA

Ashwani Yadav	Amity University Rajasthan	India
Atif Khan	University of Chicago	USA
Azilah Saparon	Universiti Teknologi MARA	Malaysia
Azmi Abdulbaki	University of Anbar	Iraq
Bagus Haryadi	Universitas Ahmad Dahlan	Indonesia
Bala Vishnu J	Anna University	India
Basari Basari	Universitas Indonesia	Indonesia
Benny Hardjono	Universitas Pelita Harapan	Indonesia
Benoît Muth	Benoît Muth	France
Bogdan Cristea	Laird	Romania
Candid Reig	University of Valencia	Spain
Changyan Ran	Three Gorges University	P.R. China
Chen Qiu	Samsung Electronics America	USA
Cheng Chen	Intel Corporation	USA
Cheruku Kumar	Amity University Rajasthan	India
Chih-Chin Liang	National Formosa University	Taiwan
China Sonagiri	Institute of Aeronautical Engineering	India
Chitrangada Roy	Sikkim Manipal Institute of Technology	India
Chong Yen Fook	University of Malaysia in Perlis	Malaysia
Chuan-Ming Liu	National Taipei University of Technology	Taiwan
Chung-Liang Chang	National Pingtung University of Science and Technology	Taiwan
Cong Pu	Marshall University	USA
Dan Dobrea	Technical University "Gh. Asachi"	Romania
Darmawaty Mohd Ali	Universiti Teknologi MARA	Malaysia
Davood Ghaderi	Bursa Technical University	Turkey
Dawam D. Jatmiko Suwawi	Telkom University	Indonesia
Deepak Punetha	Tula's Institute, Dehradun	India
Deepak Subramanian	Trusted Labs	Singapore
Deepti Theng	G. H. Raisoni College of Engineering	India
Deniz Dal	Ataturk University	Turkey
Deris Stiawan	University of Sriwijaya	Indonesia
Dharmendra Mahato	Birsa Institute of Technology Sindri, Dhanbad	India
Dilşad Engin	Ege University	Turkey
Dimitrios Kallergis	University of Piraeus	Greece
Divya Rishi Shrivastava	Manipal University Jaipur	India
Dominik Luczak	Poznan University of Technology	Poland
Donato Impedovo	Università degli Studi di Bari	Italy
Dr Eng Harish Kumar	King Khalid University	Saudi Arabia
Duc-Lam Nguyen	Seoul National University	Korea
Dwi Lastomo	Institut Teknologi Sepuluh Nopember Surabaya	Indonesia
E Hari Krishna	University College of Engineering, KU, Kothagudem	India
Eduard Babulak	National Science Foundation	USA
Eduardo Pinos	Universidad Politécnica Salesiana	Ecuador

Edward Moreno	UFS - Federal University of Sergipe	Brazil
Ehab Hussein	University of Babylon	Iraq
Elias Aboutanios	University of New South Wales	Australia
Elisha Nyamasvisva	Infrastructure University Kuala Lumpur	Malaysia
Elnaz Limouchi	Florida Atlantic University	USA
Ema Rachmawati	Telkom University	Indonesia
Emre Kiyak	Anadolu University	Turkey
Enrico Tronci	Sapienza University of Rome	Italy
Eraclito Argolo	Universidade Federal do Maranhão	Brazil
Esmeralda Djamal	Universitas Jenderal Achmad Yani	Indonesia
Evgeny Markin	USA	Russia
Ezra Morris Gnanamuthu	Universiti Tunku Abdul Rahman	Malaysia
Fairul Azhar Abdul Shukor	Universiti Teknikal Malaysia Melaka	Malaysia
Faliu Yi	University of Connecticut	USA
Farhan Siddiqui	Dickinson College	USA
Farshid PirahanSiah	MIMOS Berhad (Deep Learning)	Malaysia
Fatimah Salim	Universiti Teknologi Malaysia (UTM)	Malaysia
Federico Menna	EIT Digital	Belgium
Felix Albu	Valahia University of Targoviste	Romania
Fernando Mussoi	Federal Institute of Santa Catarina	Brazil
Francesco Grasso	University of Florence	Italy
Francesco Verde	University of Napoli Federico II	Italy
Franco Simini	Universidad de la Republica	Uruguay
Fred Berry	Purdue University	USA
Galymzhan Nauryzbayev	LN Gumilyov Eurasian National University	Kazakhstan
Gang Wang	PCTEL, Inc.	USA
Gaofei Sun	Changshu Institute of Technology	P.R. China
Gen Motoyoshi	NEC Corporation	Japan
George Pavlidis	ATHENA Research Center	Greece
Gerino Mappatao	De La Salle University	Philippines
Go Yun Il	Heriot-Watt University Malaysia	Malaysia
Grienggrai Rajchakit	Maejo University	Thailand
Haijun Pan	New Jersey Institute of Technology	USA
Haikal Satria	Universiti Teknologi Malaysia	Malaysia
Hairulazwan Hashim	Universiti Tun Hussein Onn Malaysia	Malaysia
Haitham Abu Ghazaleh	Tarleton State University	USA
Haleh Aghajani	Baylor Scott & White Health	USA
Halil Soken	Japan Aerospace Exploration Agency	Japan
Hamid Alasadi	IRAQ- BASRA	Iraq
Haniza Nahar	Universiti Teknikal Malaysia	Malaysia
Hao Wu	ZTE Corporation	P.R. China
Harikumar Rajaguru	Bannari Amman Institute of Technology	India
Harishchandra Dubey	University of Texas at Dallas	USA

Harry Prabowo	Universitas Gadjah Mada	Indonesia
Hendi Wicaksono	University of Surabaya	Indonesia
Henry Palit	Petra Christian University	Indonesia
Hermawan Hermawan	Diponegoro University	Indonesia
Hussain Saleem	University of Karachi	Pakistan
Idris bin Ismail	Universiti Teknologi PETRONAS	Malaysia
Idris Lim	University of Glasgow	United Kingdom
Imad Mohamad	University of Baghdad	Iraq
Indra Riyanto	Universitas Budi Luhur	Indonesia
Intan Sari Areni	Hasanuddin University	Indonesia
Irfan Allahi	Lahore University of Management Sciences	Pakistan
Iwan Setiawan	Universitas Diponegoro	Indonesia
J Somlal	OppNagarjuna High School, Pedavadlapudi	India
Jamal Hussein	Senior Communication Engineer	United Kingdom
Jana Bhaskara Rao	Anil Neerukonda Institute of Technology and Sciences	India
Jenila Livingston	VIT Chennai	India
Jens Klare	Fraunhofer FHR	Germany
Jiachyi Wu	National Taiwan Ocean University	Taiwan
Jing-Sin Liu	Academia Sinica	Taiwan
Joni Simatupang	President University	Indonesia
José Rufino	Universidade de Lisboa	Portugal
Josip Music	University of Split	Croatia
Juan Carrillo de Gea	University of Murcia	Spain
Juergen Freudenberger	University of Applied Sciences, Konstanz	Germany
Jui-Yuan Lin	Southern Taiwan University of Science and Technology	Taiwan
Julian Webber	Osaka University	Japan
Julio Rojas-Mora	Universidad Austral de Chile	Chile
Kai Zhu	Bell Labs, Nokia	P.R. China
Kamal Chenaoua	King Fahd University of Petroleum & Minerals	Saudi Arabia
Kamal Kant Sharma	Chandigarh University	India
Kamarulafizam Ismail	Universiti Teknologi Malaysia	Malaysia
Karim Al-Saedi	Mustansiriyah University	Iraq
Karim Sebaa	University of Dr Yahia Fares	Algeria
Karthikeyan Ramasamy	Anna University, Chennai	India
Kashif Sharif	Beijing Institute of Technology	P.R. China
Kaveh Ahmadi	University of Toledo	USA
Ke Zeng	Microsoft	USA
Kesavaraja D	Dr Sivanthi Aditanar College of Engineering	India
Kezhi Li	Imperial College London	United Kingdom
Khairul Anuar Mohamad	Universiti Tun Hussein Onn Malaysia	Malaysia
Khairul Munadi	Syiah Kuala University, Faculty of Engineering	Indonesia
Khaled Itani	ISAE Cnam Liban	Lebanon
Khalil Azha Mohd Annuar	Universiti Teknikal Malaysia Melaka	Malaysia

Kittipong Tripetch	Keio University	Japan
Konstantinos Giannakis	Ionian University	Greece
Kotb Basem	Menofia University	Egypt
Kunxia Wang	Hefei University of Technology	P.R. China
Kyungbaek Kim	Chonnam National University	Korea
Lacrimioara Grama	Technical University of Cluj-Napoca	Romania
Lateeef Adesola Akinyemi	Lagos State University, Lagos	Nigeria
Lavish Kansal	Lovely Professional University	India
Lei Liu	City University of Hong Kong	Hong Kong
Liang-Bi Chen	Southern Taiwan University of Science and Technology	Taiwan
Lija Jacob	Saintgits College of Engineering	India
Long Chen	Guangdong University of Technology (GDUT)	P.R. China
Lucio Agostinho	Federal University of Technology - Campus Apucarana	Brazil
Luis Teixeira	Universidade Catolica Portuguesa	Portugal
Lukman Audah	Universiti Tun Hussein Onn Malaysia	Malaysia
M. Fahim Khan	The University of Tokyo	Japan
M. Hassaballah	South Valley University	Egypt
Madhu Ghattamaneni	Sree Vidyanikethan Engineering College	India
Madhur Upadhayay	Shiv Nadar University	India
Magali Rossi	Technical College FATEC	Brazil
Mahmoud Doughan	Lebanese University, Faculty of Engineering, Branch 3	Lebanon
Mahmoud Rokaya	Taif University	Saudi Arabia
Malaoui Abdessamad	Sultan Moulay Slimane University of Beni Mellal	Morocco
Manojkumar Parmar	Robert Bosch Engineering and Solutions Limited	India
Manolo Hina	ECE Paris School of Engineering	France
Manoochehr Nahvi	University of Guilan, Rasht	Iran
Manuel Silva	School of Engineering, Polytechnic Institute of Porto	Portugal
Marcel Wagner	University of São Paulo	Brazil
Marco Guazzone	University of Piemonte Orientale	Italy
Marek Michalski	Poznan University of Technology	Poland
Mark Leeson	University of Warwick	United Kingdom
Marwan Nafea	Universiti Teknologi Malaysia (UTM)	Malaysia
Mas Rina Mustaffa	Universiti Putra Malaysia	Malaysia
Masrullizam Mat Ibrahim	Universiti Teknikal Malaysia Melaka	Malaysia
Maulin Joshi	Gujarat Technological University	India
Maushumi Barooah	Gauhati University	India
Maxime Leclerc	Thales Canada Inc	Canada
Maxwell Dondo	Defence Research & Development Canada	Canada
Mayank Chaturvedi	Graphic Era University	India
Megat Farez Azril Zuhairi	Universiti Kuala Lumpur	Malaysia
Meirista Wulandari	Universitas Indonesia	Indonesia
Meliksah Ozakturk	Iskenderun Technical University	Turkey
Michael McGuire	University of Victoria	Canada

Minghai Feng	Apple	P.R. China
Mochammad Facta	Diponegoro University	Indonesia
Mohamad Faizal Ab Jabal	Universiti Teknologi MARA (Johor)	Malaysia
Mohamad Fauzi Zakaria	Universiti Tun Hussein Onn Malaysia	Malaysia
Mohamad Koteich	Renault-Nissan Alliance	France
Mohamed Moharam	Misr University For Science and Technolgy	Egypt
Mohammad Al-Mashhadani	Al-Maarif University College	Iraq
Mohammad AlOtaibi	Imam University	Saudi Arabia
Mohammad Al-Shabi	University of Sharjah	United Arab Emirates
Mohammad Khaja Shaik	St Ann's College of Engineering and Technology	India
Mohammad Khalily Dermany	Islamic Azad University, Khomein Branch	Iran
Mohammad Nasir Uddin	American International University-Bangladesh	Bangladesh
Mohammed Al-Rayif	King Khalid University	Saudi Arabia
Mohammed Younis	University of Baghdad	Iraq
Mohd Ashraf Ahmad	Universiti Malaysia Pahang	Malaysia
Mohd Daud	Politeknik Sultan Salahuddin Abdul Aziz Shah	Malaysia
Mohd Izhwan Muhamad	Faculty of Engineering, Universiti Putra Malaysia	Malaysia
Mohd Khair Hassan	Universiti Putra Malaysia	Malaysia
Mohd Khairi Mohd Zambri	Universiti Teknikal Malaysia Melaka	Malaysia
Mohd Shahril Ahmad Khiar	Universiti Teknikal Malaysia Melaka	Malaysia
Mohsen Karimzadeh Kiskani	University of California Santa Cruz	USA
Moorthy Veerasamy	Vishnu Institute of Technology	India
Muataz Salih	Flex	Malaysia
Muftah Fraifer	IDC-CSIS-UL	Ireland
Muhamad Fadli Ghani	Universiti Kuala Lumpur Malaysian Institute of Marine Engineering Technology	Malaysia
Muhammad H Jamaluddin	Universiti Teknikal Malaysia Melaka	Malaysia
Muhammad Ishtiaq Ahmad	Beijing Institute of Technology	P.R. China
Muhammad Syafrullah	Universitas Budi Luhur	Indonesia
Muhammad Zahid Tunio	Dawood University Engineering & Technology (DUET)	Pakistan
Mujtaba Mahdi Mudassir Syed	Osmania University	India
Mundukur Bhat	Vignan's University	India
N. Prabaharan	SASTRA Deemed University	India
Nadeem Qazi	Brunel University	United Kingdom
Narottam Das	University of Southern Queensland	Australia
Narumol Chumuang	Muban Chombueng Rajabhat University	Thailand
Nasser Najibi	City University of New York	USA
Naveed Sabir	Mehran Univ. of Engineering & Technology, Jamshoro	Pakistan
Naveen Kumar Rangaraju	JNTU Hyderabad	India
Naveena C	VTU	India
Nibras Faqera	Universiti Sains Malaysia	Malaysia
Nidhal Abass	University of Kufa	Iraq
Nik Rumzi Nik Idris	Universiti Teknologi Malaysia	Malaysia

Nikhil Bhargava	Indian Institute of Technology	India
Nikisha Jariwala	VNSGU	India
Ning Zhao	East China Research Institute of Electronic Engineering	P.R. China
Nisha Mithal	General Management	USA
Norashikin M. Thamrin	University Teknologi MARA	Malaysia
Noraziahtulhidayu Kamarudin	University College of Technology Sarawak	Malaysia
Norizam Sulaiman	Universiti Malaysia Pahang	Malaysia
Norkamruzita Saadon	Universiti Teknologi MARA Terengganu	Malaysia
Nour El Deen Khalifa	Cairo University	Egypt
Nuno Rodrigues	Instituto Politécnico de Bragança	Portugal
Omar Al saif	Mosul University	Iraq
Omar Daoud	Philadelphia University	Jordan
Omer Gul	Middle East Technical University	Turkey
Otavio Lavor	UFERSA	Brazil
Pakawan Pugsee	Chulalongkorn University	Thailand
Pancham Shukla	London Metropolitan University	United Kingdom
Paolo Crippa	Università Politecnica delle Marche	Italy
Paramate Horkaew	Suranaree University of Technology	Thailand
Parameshachari B Divakarachari	Visvesvaraya Technological University	India
Partha Ray	Sikkim University	India
Patrick Ho	Monash University	Malaysia
Pawel Rozga	Lodz University of Technology	Poland
Pedro Gonçalves	Universidade de Aveiro	Portugal
Peter Noel	TSMC	Canada
Peter Roessler	University of Applied Sciences Technikum Wien	Austria
Pierre Tsafack	University of Buea	Cameroon
Prashant Upadhyaya	KCNIT-Banda	India
Priti Rege	College of Engineering, Pune	India
Pujianto Yugopuspito	Universitas Pelita Harapan	Indonesia
Puneet Kumar	Symantec Corp	USA
Punith Kumar M b	University of Mysore	India
Qiu Xue-song	Beijing University of Posts and Telecommunications	P.R. China
Raad Al-Qassas	Princess Sumaya University For Technology	Jordan
Raaed Ibrahim	Foundation of Technical Education	Iraq
Rafael Cepeda	InterDigital Europe Ltd.	United Kingdom
Rafael Marinho	UFPB	Brazil
Raid Daoud	Northern Technical University/Al-Hawija Institute	Iraq
Raj Jaiswal	Galgotias University	India
Rajeev Mathur	Geetanjali Instt of Tech Studies, Udaipur	India
Rajeev Sobti	Lovely Professional University	India
Ramaprabha Ramabadran	SSN College of Engineering	India
Ramesh Singh	DTU Delhi	India
Ramkumar Jaganathan	VLB Janakiammal College of Arts and Science	India

Ramoshweu Lebelo	Vaal University of Technology	South Africa
Rana Al Salman	Al Mustansiriya University	Iraq
Rana Khudhair Ahmed	Al-Rafidain University College	Iraq
Rana Sircar	Ericsson	India
Rasmus Nielsen	Cisco Systems	USA
Raveendranathan Kalathil Chellappan	College of Engineering Thiruvananthapuram	India
Ravi Subban	Pondicherry University, Pondicherry	India
Rayane El Sibai	Sorbonne Université	France
Reena Singh	MIT Manipal	India
Rehan Qureshi	Sir Syed University of Engineering & Technology	Pakistan
Renam da Silva	Universidade Federal do Rio de Janeiro	Brazil
Renliang Gu	Google Inc.	USA
Riccardo Pecori	eCAMPUS University	Italy
Riko Saragih	Maranatha Christian University	Indonesia
Rini Hasanah	Brawijaya University	Indonesia
Robert Pucher	University of Applied Sciences Technikum Wien	Austria
Robert Szabolcsi	Óbuda University	Hungary
Roberto Carlos Herrera Lara	National Polytechnic School	Ecuador
Rodrigo Campos Bortoletto	São Paulo Federal Institute of Education, Science and Technology	Brazil
Rodrigo Montufar-Chaveznava	Facultad de Ingeniería, Universidad Nacional Autonoma de Mexico	Mexico
Roman Senkerik	Tomas Bata University in Zlín, Faculty of Applied Informatics	Czech Republic
Rostyslav Sklyar	Independent Professional	Ukraine
S Kannadhasan	Tamilnadu Polytechnic College	India
S Zafaruddin	Bar-Ilan University	Israel
Saeid Nahavandi	Deakin University	Australia
Safdar Bouk	Kyungpook National University	Korea
Sakena Abdul Jabar	Universiti Malaysia Sarawak	Malaysia
Saman Parvaneh	Philips Research North America	USA
Sandeep Kakde	Y C College of Engineering	India
Santosh Chapaneri	University of Mumbai	India
Sarada Dakua	Hamad Medical Corporation	Qatar
Sarvesh Sharma	BITS-Pilani	India
Scott Trent	IBM Research - Tokyo	Japan
Seng Hansun	Universitas Multimedia Nusantara	Indonesia
Seppo Sirkemaa	University of Turku	Finland
Sergey Makarov	Peter the Greate St. Petersburg Polytechnic University	Russia
Seungchul Ryu	Yonsei University	Korea
Shailendra Singh	University Of California, Riverside	USA
Sharad Mohod	SGB Amravati University Amravati	India
Shashikant Patil	SVKM NMIMS Mumbai India	India

Shibiao Wan	The Hong Kong Polytechnic University	Hong Kong
Shilpa Mehta	FACULTY	India
Shishir Shukla	Amity University	India
Shuang Yin	Google	USA
Smitha K. G.	Nanyang Technological University	Singapore
Srinivasa Rao Balasani	Visakha Institute of Engineering & Technology	India
Srinivasulu Tadisetty	Kakatiya University College of Engineering and Technology	India
Steffen Späthe	Friedrich-Schiller-University Jena	Germany
Su Fong Chien	MIMOS Berhad	Malaysia
Sudhanshu Jha	National Institute of Technology (NIT), Jamshedpur	India
Sükrü Ozan	Izmir Institute of Technology	Turkey
Sumit Waghmare	Utopus Insights	India
Sundararaju Karuppannan	Two Thousand Two Anna University	India
Suneeta Harlapur	Vemana Institute of Technology	India
Sunil Kumar	Mody University of Science and Technology	India
Suraya Mohammad	University Kuala Lumpur - British Malaysian Institute	Malaysia
Suryakanthi Tangirala	Faculty of Business	Botswana
Sutrisno Sutrisno	Diponegoro University	Indonesia
Tadanki Muni	K L University	India
Takeshi Tsuchiya	Suwa University of Science	Japan
Tapodhir Acharjee	Assam University, Silchar	India
Tarun Yadav	Scientific Analysis Group, Defence Research & Development Organisation, Ministry of Defence, GOI	India
TH Sutikno	Institute of Advanced Engineering and Science	Indonesia
Thaksen Parvat	Sinhgad Institute of Technology, Lonavala	India
Thinagaran Perumal	University Putra Malaysia	Malaysia
Thitinan Tantidham	Mahidol University	Thailand
Tianhua Xu	University of Warwick	United Kingdom
Tole Sutikno	Universitas Ahmad Dahlan	Indonesia
Tomoaki Nagaoka	National Institute of Information and Communications Technology	Japan
Toufik Sebbagh	University of Skikda	Algeria
Tresna Dewi	Politeknik Negeri Sriwijaya	Indonesia
Tris Dewi Indraswati	Institut Teknologi Indonesia	Indonesia
V Jyothsna	JNTUH	India
Vahid Khalilzad-Sharghi	Medical Imaging Solutions USA	USA
van Thuan Do	Wolffia AS	Norway
Vasos Vassiliou	University of Cyprus	Cyprus
Victor Ramos	Universidad Autonoma Metropolitana	Mexico
Vikash Bhardwaj	Radha Govind Group of Institutions	India
Vito Veneziano	University of Hertfordshire	United Kingdom
Vivek Kute	R. T. M. Nagpur University, Nagpur	India

Wael Salah	Palestine Technical University - Kadoorie	Palestine
Wassim Alexan	German University in Cairo	Egypt
Xia Li	Qualcomm	USA
Xiangguo Li	Henan University of Technology	P.R. China
Xiaojun Li	Texas A&M University	USA
Ying-Ren Chien	National I-Lan University	Taiwan
Yiting Xia	Facebook Inc.	USA
Yong Sun	Schlumberger	USA
Yoshihiro Ito	Nagoya Institute of Technology	Japan
Yu Wang	Tianjin TEDA cable TV Network Co. Ltd	P.R. China
Yuchun Guo	Beijing Jiaotong University	P.R. China
Yulius Prabowo	Kalbis Institute	Indonesia
Yumnam Jayanta	National Institute of Electronics and Information Technology (Kolkata)	India
Yun Ai	Norwegian University of Science and Technology	Norway
YunWu Zhang	Southeast University	P.R. China
Zaher Haddad	Alaqsa University	Palestine
Zahéra Mekkioui	University of tlemcen	Algeria
Zesheng Chen	IPFW	USA
Zhao Chen	Columbia University	USA
Zhaoquan Gu	Guangzhou University	P.R. China
Zhen Mo	VMware	USA
Zhengwei Hao	MathWorks	USA
Zulfatman Has	University of Muhammadiyah Malang	Indonesia
Zuraini Dahari	Universiti Sains Malaysia	Malaysia

Table of Contents

2018 5th International Conference on Electrical Engineering, Computer Science and Informatics (EECSI)

LIST OF PAPERS

A B C D E F G H I K L M N O P Q R S T U V W

A TOP A B C D E F G H I K L M N O P Q R S T U V W

F TOP A B C D E F G H I K L M N O P Q R S T U V W

G TOP A B C D E F G H I K L M N O P Q R S T U V W

I TOP A B C D E F G H I K L M N O P Q R S T U V W

T TOP A B C D E F G H I K L M N O P Q R S T U V W

U TOP A B C D E F G H I K L M N O P Q R S T U V W

V TOP A B C D E F G H I K L M N O P Q R S T U V W

W TOP A B C D E F G H I K L M N O P Q R S T U V W

A Survey on Topologies and Controls of Z-Source Matrix Converter

Tri Wahono
Department of Electrical Engineering
Universitas Ahmad Dahlan
Yogyakarta, Indonesia
triwahono060@gmail.com

Tole Sutikno
Department of Electrical Engineering
Universitas Ahmad Dahlan
Yogyakarta, Indonesia
tole@ee.uad.ac.id

Nuryono Satya Widodo
Department of Electrical Engineering
Universitas Ahmad Dahlan
Yogyakarta, Indonesia
nuryono.sw@ee.uad.ac.id

Mochammad Facta
Department of Electrical Engineering
Universitas Diponegoro
Semarang, Indonesia
mochfacta@gmail.com

***Abstract*--This paper describes the Z-source matrix converter (ZS-MC) topology which specifically discusses topology and control on the ZS-MC. There are two topologies on the ZS-MC, namely Z-source direct-MC (ZS-DMC) and indirect-MC (ZS-IMC). The difference of each of these topologies is in the number of switching mosfets, where ZS-DMC put on nine switches, while ZS-IMC eighteen switches. ZS-IMC topology overcomes the limitations of traditional MC voltage reinforcement and accommodates the operation of buck and boost converter by reducing the number of switches and providing high efficiency.**

Keywords--- Z-source matrix converter (ZS-MC), Z-Source direct matrix converter (ZS-DMC), Z-Source Indirect matrix converter (ZS-IMC), Topologies, Modulation, Control

I. INTRODUCTION

There are several converter techniques, namely ac-to ac converters which are often called cyclo-converter, dc-to-dc converter, dc-to ac inverter, and rectifier ac-to dc from some of these techniques, how it works with directional models. The classification of the model is a weakness that can only work in one direction, so there are still many stress losses [1]. Therefore the emergence of a matrix converter, matrix converter topology is promising for universal power conversion. The converter matrix offers several significant advantages, like a power factor that can be adjusted. ac-to ac matrix converter topology provides a transformation system for both amplitude and frequency simultaneously in multi-phase voltages without the use of energy storage [2]. Matrix converter can produce sinusoidal signal input current and output frequency higher than input frequency [2][3]. There are two matrix converter topologies including direct matrix converter (DMC) and indirect matrix converter (IMC), DMC can convert voltage and current in one step by using a bidirectional switch that is controlled [4].

As an alternative IMC has a two-stage power conversion with an input stage with six bidirectional switches. The constraints on this topology are voltage reinforcement. therefore z-source topology has high performance and can operate at various load susceptibility [5], by implementing the Z-source network to the conventional three-phase matrix converter utilizes the boost operation, so that the transfer ratio of voltage reached by combining the two topologies to design the Z-source matrix converter (ZS-MC).

ZS-MC does not use a complicated turnover strategy because the Z-source matrix converter intentionally employs the short circuit that is avoided in the conventional matrix [6][7]. Z-source matrix converter is divided into two, namely Z-source indirect matrix converter (ZS-IMC) and Z-source direct matrix converter (ZS-DMC). The operation of the ZS-MC is explained by two modes, such as shoot through zero states and non-shoot through the states. In this paper discusses topology and control in ZS-MC. Section II discusses ZS-MC method, by applying Z-source to utilize the voltage ratio gain feature. Section III discusses ZS-IMC which explains the configuration, control, modulation, and the development of ZS-IMC which is quasi Z-source indirect matrix converter. For section IV discusses the ZS-DMC which consists of configuration, control, and modulation. In section V it represents the two topologies, ZS-IMC topology overcomes the limitations of traditional MC voltage reinforcement and accommodates the operation of buck and boost converter by reducing the number of switches and providing high efficiency.

II. Z-SOURCE MATRIX CONVERTER TOPOLOGIES

ZS-MC is a new topology that implements the Z-source network (ZS-N), to overcome the limitations of the voltage transfer ratio that has been carried out on conventional matrix converters. The converter uses an exclusive impedance network on the main circuit of the converter to the main power source to create the operation of buck and boost [8]. Deploying the ZS-N to utilize the voltage ratio gain feature is intended to remove complicated switching strategies because ZS-MC deliberately uses the short circuit that is avoided in conventional matrix converters. Fig.1 is a scheme of ZS-MC.

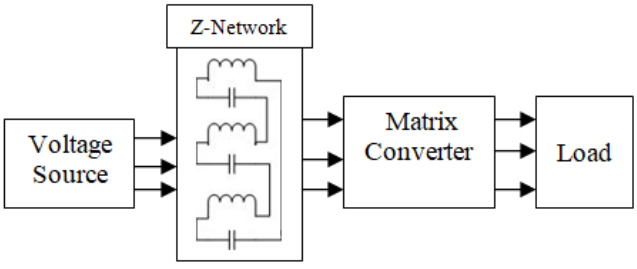

Fig. 1. ZS-MC scheme

Fig. 2 shows the structure of the ZS-MC. There are two structure, namely ZS-IMC and ZS-DMC. The ZS-IMC has been possibly developed as Quasi ZS-IMC.

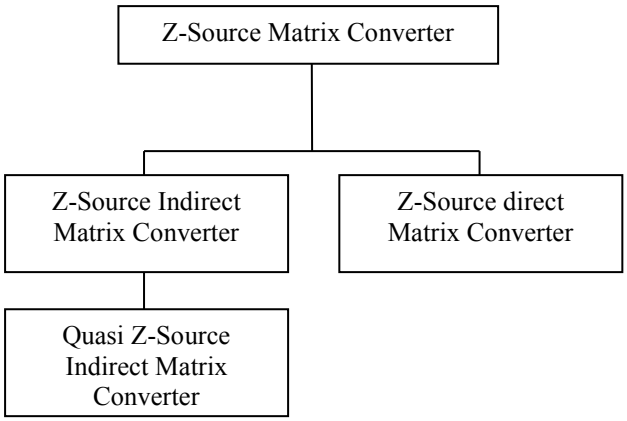

Fig. 2. ZS-MC classification

III. Z-SOURCE INDIRECT MATRIX CONVERTER

ZS-IMC has 18 bidirectional switches that convert voltage and current in one step as development for a choice to matrix converter. This configuration is made of two conventional converters combined together; this indirect converter circuit has two stages. The first stage is the rectifier and the second stage is the inverter. Two switching cells form rectifier for the proposed topology.

A. Configuration of ZS-IMC

The topology of ZS-IMC is illustrated in Fig 3. The fundamental idea of the ZS-IMC is a separation in three stage for AC/AC conversion: In the Z-source, the rectifier stage is constructed from six switches, two directions are constructed with 18 switch directions [9][10], while the inverter level has six feedback. a two-port circuit consisting of a capacitor separator L4 and L5 and C4 and C5 connected, form X is used to provide the source of the combined impedance of the router level to the inverter stage, section S1 is used bidirectional [11].

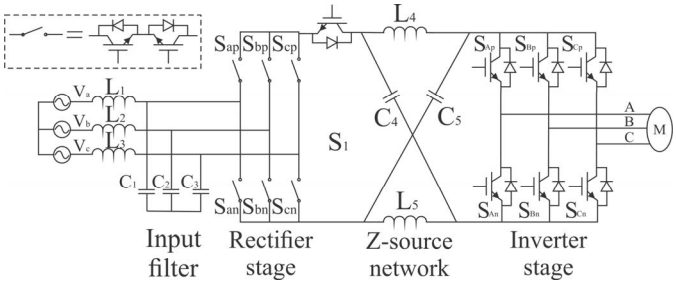

Fig. 3. Topology configuration of ZS-IMC [11].

B. Control of ZS-IMC

The ZS-IMC consists of three parts: the source-side Matrix Converter, Z-source network, and matrix converter side-load [2], [12], [13]. The most important aspect of ZS-MC is to execute the operation of buck and boost converter. The topology can increase and decrease the output voltage compared to the input voltage. Each ZS-IMC utilizes 18 ac switches, so in practical it will be difficult to direct implementation [14]. However, this gave us the finishing point for the proposed topology and assisted us to conclude several practical ZS-MCs. Fig. 4 shows an example of simplified ZS-MC, where the MC source-side in Fig. 3, substituted by three-phase AC switch symbolized as S0 When S0 is stored, then the operation of simplified ZS-MC is the same as traditional VS-MC procedure [9], [15]. An active voltage and zero voltage to the shoot-through status load is produced and included in the PWM MC, and the S0 is in off position during the shoot-through status. As the interval of the shoot-through become longer, then the output voltage becomes greater and increase. The proposed mechanism clearly reduces the number of switches, compared to the combination shown in Fig. 4.

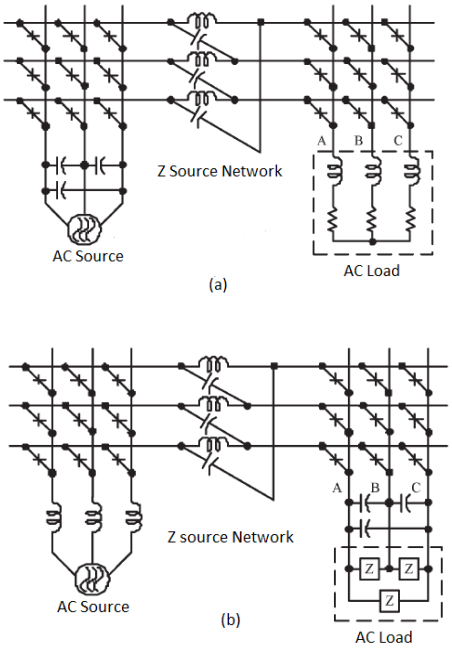

Fig. 4. ZS-IMC (a) Voltage-fed, (b) Current-fed [16].

C. Modulation Techniques on ZS-IMC

Modulation techniques used in ZS-IMC use carrier-based pulse width modulation (PWM) compared to space vector modulation (SVM) techniques. Another technique proposed with space vector, in the switching period to minimize harmonic generation in the output waveform. therefore it takes overmodulation, the result of over modulation on the inevitable low-order harmonics produced in the output. Harmonic generation in the vector space d2-q2 results in increased losses. minimize harmonic attention as the desired output is in the over modulation area [17].

The development of ZS-IMC that has been carried out by [18] is a Quasi-Z-source indirect matrix converter (QZS-IMC). By utilizing the Z-source network to integrate filter functions so that they do not require an input filter. The QZS-IMC topology is shown in fig. 5. From this series it can be seen that there is a combination of one switch two inductors L1 and L2 and capacitors C1 and C2. It can overcome the voltage ratio, consisting of two stages of

correction and inversion stage. But the results are not easy for system integration and manufacturing processes.

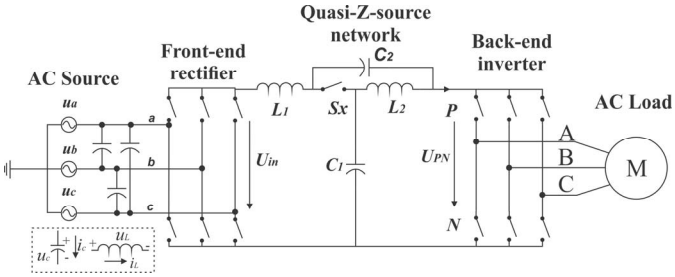

Fig. 5. Quasi Z-Source Indirect Matrix Converter

IV. Z-SOURCE DIRECT MATRIX CONVERTER

ZS-DMC has nine bidirectional switches that convert voltage and current in one step. The basic configuration of ZS-DMC [19][20]. It consists of ZS-N and three phase matrix converter connected between load and Z-source. The matrix converter has nine bidirectional switches and each bidirectional switch has two IGBT connected in anti-parallel [21]. The ZS-DMC is explained by two modes i.e. shoot through zero and non-shoot through state [8].

A. Configuration of ZS-DMC

The configuration of ZS-DMC shown in Fig. 6, has three main parts, namely, the AC input source, Z-source network, and load. A different level for step-up the voltage on the output side is executed by making a control mechanism the short circuit between the input phases. The ZS-N contains six capacitors, six inductors, and three bidirectional switches. All three switches must have the same status [22].

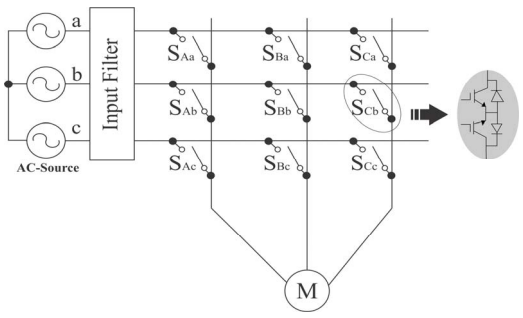

Fig. 6. Main circuit of Z-source direct matrix converter [23]

B. Control of ZS-DMC

The utilize the boost feature, ZS-DMC mechanism is carried out in two different states i.e. a shoot-through zero state as in Fig. 7 and a non-shoot-through state as shown in Fig. 8 [24]. During the shoot through the state, switches S1, S2, and S3 are off, which is Sz=0 for boosting operation. During the non-shoot through state, switches S1, S2, and S3 are on, which is Sz=1 for normal operation [25]. It is assumed that the inductors L1, L2, and L3 have the equal inductance value and capacitor C1, C2 and C3 are in identical capacitance. By this configuration, the symmetrical-N is created.

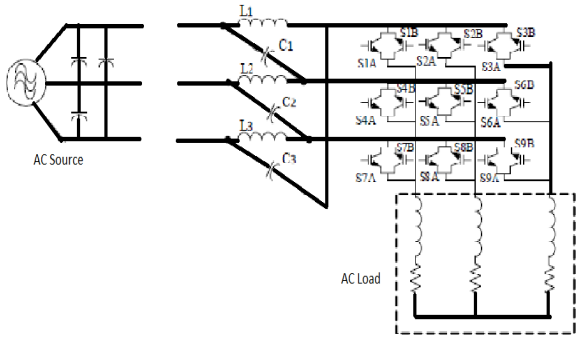

Fig. 7. ZS-DMC in shoot through zero state

Fig. 7 shows the configuration of the shoot-through state for the proposed topology at interval of T0 during a period of switching process [26]. The matrix converter by design is short-circuited and all switches S1, S2 and S3 are in off position. In Fig. 7, the reconfiguration of equivalent circuit deduces the voltage transfer ratio, by making assumption that there is a symmetrical three-phase system and expansion of input and output voltages.

ZS-DMC is in the non-shoot-through state at T1 interval during a period of the switching process, T [27][28]. Fig. 7 shows the configuration circuit for the non-shoot-through state.

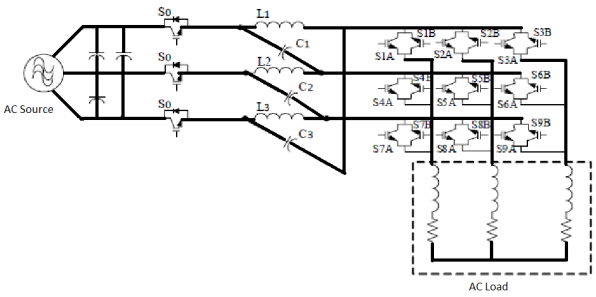

Fig. 8. ZS-DMC in non-shoot-through-state

C. Modulation Techniques on ZS-DMC

ZS-DMC uses the modulation space vector method. According to the principle, where each two-phase input does not get a short circuit and must make a closed loop formation. For six active vectors and three zero vectors, there are nine switches to use. Improved performance of ZS-DMC using a different PWM modulation method. have the appropriate PWM schema that is capable of achieving the maximum susceptible output voltage. Minimize harmonics at the output and input currents, providing maximum efficiency [29]. ZS-DMC is the distribution of shoot through the traditional PWM modulation concept. In this section the carrier PWM and space vector based on pulse width modulation schema (SVPWM) [30]. By comparing the two modulations, the THD input current and THD voltage from the SVPWM scheme is 1.2% and 8% lower than PWM, so it shows that SVPWM is suitable for ZS-DMC.

Both of the topologies, ZS-IMC and ZS-DMC in each configuration and control using SVPWM modulation are presented in Table I.

TABLE I. Comparison between ZS-IMC and ZS-DMC of topologies using SVPWM modulation

Type	Configuration	Control
ZS-DMC	by two modes, Shoot through zero state and Non-shoot through state	ZS-DMC has nine bidirectional switches that convert voltage and current in one step
ZS-IMC	two stage rectifier and inverter	Each ZS-IMC requires an 18 ac switch, which makes it difficult to use directly

V. CONCLUSION

This manuscript outlines a literature review on different Z-source matrix converter (ZS-MC) topologies, including Z-source indirect matrix converter (ZS-IMC) and Z-source direct matrix converter (ZS-DMC). ZS-IMC topology overcomes the limitations of traditional MC voltage reinforcement and makes the operation of buck and boost by decreasing the number of switches to obtain high efficiency, reliability and low cost. ZS-IMC topology is very suitable for research and applied in industry.

ACKNOWLEDGMENT

This research was supported by Electrical Engineering Research Group Ahmad Dahlan University

REFERENCES

[1] T. Friedli and J. W. Kolar, "Milestones in Matrix Converter Research," *IEEJ J. Ind. Appl.*, vol. 1, no. 1, pp. 2–14, 2012.

[2] R. Ghoni, A. N. Abdalla, S. P. Koh, and H. F. Rashag, "Issues of matrix converters : Technical review," vol. 6, no. 15, pp. 3576–3588, 2011.

[3] P. W. Wheeler, J. Rodríguez, S. Member, J. C. Clare, L. Empringham, and A. Weinstein, "Matrix Converters : A Technology Review," vol. 49, no. 2, pp. 276–288, 2002.

[4] N. Nie, "Matrix Converter : Circuit Topology , Model , and Analysis," pp. 5918–5923, 2015.

[5] E. Babaei and E. Shokati Asl, "A new topology for Z-source half-bridge inverter with low voltage stress on capacitors," *Electr. Power Syst. Res.*, vol. 140, pp. 722–734, 2016.

[6] A. P. Ii, "Z -Source Converters : Topologies , Modulation," vol. 65, no. 10, pp. 8274–8276, 2018.

[7] X. Fang and Z. Chen, "Current-Fed Z-Source Matrix Converter," pp. 93–96, 2009.

[8] R. Bharani, V. V Adhisree, B. Amman, E. District, and T. Nadu, "Performance Analysisi of Z-source Matrix Converter by Implementation Different PWM Schemes," pp. 1–9.

[9] T. Friedli, J. W. Kolar, J. Rodriguez, and P. W. Wheeler, "Comparative Evaluation of Three-Phase AC – AC Matrix Converter and Voltage DC-Link Back-to-Back Converter Systems," vol. 59, no. 12, pp. 4487–4510, 2012.

[10] A. Ammar, S. Member, H. Y. Kanaan, S. Member, N. Moubayed, S. Member, M. Hamouda, and S. Member, "A Technology Survey of Matrix Converters in Power Generation Systems," 2017.

[11] W. Song and Y. Zhong, "A Study of Z-Source Matrix Converter With High Voltage Transfer Ratio," pp. 8–13, 2008.

[12] F. N. Luca Zarri, Giovanni Serra, *Control of Matrix Converters*. 2007.

[13] S. H. Hosseini, J. Nabati, and A. Mirlou, "Generalized Single Phase Z-Source Matrix Converter," pp. 404–408, 2011.

[14] F. Z. Peng and S. Member, "Z-Source Inverter," vol. 39, no. 2, pp. 504–510, 2003.

[15] A. Hakemi and M. Monfared, "Very high gain three-phase indirect matrix converter with two Z-source networks in its structure," 2017.

[16] B. Ge, Q. Lei, S. Member, W. Qian, and F. Z. Peng, "A Family of Z-Source Matrix Converters," vol. 59, no. 1, pp. 35–46, 2012.

[17] M. Chai, D. Xiao, R. Dutta, and J. E. Fletcher, "Space vector PWM techniques for three-to-five-phase indirect matrix converter in the overmodulation region," *IEEE Trans. Ind. Electron.*, vol. 63, no. 1, pp. 550–561, 2016.

[18] M. Li, Y. Liu, H. Abu-rub, and S. Member, "Optimizing Control Strategy of Quasi-Z Source Indirect Matrix Converter for Induction Motor Drives," no. Dmc.

[19] L. Rmili, S. Rahmani, and K. Al-haddad, "A review of Indirect Matrix Converter Topologies," vol. 1, no. June, pp. 30–37, 2015.

[20] M. Su, Z. Zhao, H. Dan, T. Peng, Y. Sun, R. Che, F. Zhang, and Q. Zhu, "Modified modulation scheme for three-level diode-clamped matrix converter under unbalanced input conditions," pp. 1–9, 2018.

[21] E. Karaman, F. Niu, and A. M. Trzynadlowski, "Three-Phase Switched-Inductor Z-Source Matrix Converter," pp. 1449–1454, 2012.

[22] Z. Wang, Y. Guo, Y. Guo, W. Deng, and X. Wang, "Study of Quasi Z-source Direct Matrix Converter based on New Strategy of Dual Space Vector Modulation," pp. 2–7, 2017.

[23] S. B. Omar Ellabban, Haitham Abu-Rub, "Z-Source Matrix Converter : An Overview," vol. 8993, no. c, 2015.

[24] K. Park, S. Member, K. Lee, S. Member, and F. Blaabjerg, "Improving Output Performance of a Z-Source Sparse Matrix Converter Under Unbalanced Input-Voltage Conditions," vol. 27, no. 4, pp. 2043–2054, 2012.

[25] H. M. Nguyen, H. Lee, and T. Chun, "Input Power Factor Compensation Algorithms Using a New Direct-SVM Method for Matrix Converter," vol. 58, no. 1, pp. 232–243, 2011.

[26] C. N. El-khoury, H. Y. Kanaan, I. Mougharbel, and K. Al-haddad, "Implementation of a Series Z-source Very Sparse Matrix Converter in a PMSG-based WECS," 2018.

[27] M. Guo, Y. Liu, and B. Ge, "Optimum Boost Control of Quasi-Z Source Indirect Matrix Converter," vol. 0046, no. c, 2018.

[28] R. Prasad, K. Basu, K. K. Mohapatra, M. Ieee, N. Mohan, and F. Ieee, "Ride-Through Study for Matrix-Converter Adjustable-Speed Drives during Voltage Sags," pp. 686–691, 2010.

[29] C. S. A. Sekhar, R. Hemantha, V. Raghavendrarajan, and M. Sasikumar, "Space Vector Modulation Based Direct Matrix Converter for Stand-Alone system," *Int. J. Power Electron. Drive Syst.*, vol. 4, no. 1, pp. 24–35, 2014.

[30] J. Rodriguez, M. Rivera, J. W. Kolar, and P. W. Wheeler, "A review of control and modulation methods for matrix converters," *IEEE Trans. Ind. Electron.*, vol. 59, no. 1, pp. 58–70, 2012.

AUTHOR INDEX

EECSI 2018
CONFERENCE

Malang, Indonesia

http://eecsi.org/2018