

Identitas Paper

Paper ID / DOI	18351 / DOI: https://doi.org/10.18280/ria.370206
Judul Paper	Application of Median and Mean Filtering Methods for Optimizing Face Detection in Digital Photo
Authors	SUNARDI, Anton Yudhana, Setiawan Ardi Wijaya*
Jurnal	Revue d'Intelligence Artificielle (RIA)
Penerbit	Lavoisier
Negara	France
Quartile dan SJR	Scopus Q3, SJR 0.3 https://www.scimagojr.com/journalsearch.php?q=24847&tip=sid&clean=0
Terbit	Vol 37 No 2 April 2023 pp 291-297
Link Paper	https://www.iieta.org/journals/ria/paper/10.18280/ria.370206



Proses Pengelolaan Paper

Tahap	Tanggal	Proses/Aktivitas
1	04 December 2022	Submission
2	30 January 2023	Revision required
3	02 February 2023	Submit the revision
4	07 February 2023	Accepted
5	24, 28 February 2023	Editing process
6	30 April 2023	Published

			Nov-22				Dec-22				Jan-23				Feb-23				Mar-23				Apr-23			
	Quartile	SJR	I	II	III	IV	I	II	III	IV	I	II	III	IV	I	II	III	IV	I	II	III	IV	I	II	III	IV
RIA-apr	Q3	0.30					4	10						30	2	7	24	28								30

Tahap 1
Submission, 04 December 2022

Revue d'Intelligence Artificielle



OPEN JOURNAL SYSTEMS

Tasks 0

Submissions

Submission LibraryView Metadata

Application of Median and Mean Filtering Methods for Optimizing Face Detection in Digital Photo
Sunardi Sunardi, Anton Yudhana, Setiawan Ardi Wijaya

SubmissionReviewCopyeditingProduction

Submission Files

36401-1jaya_diudara, Author, RIA Template 1.docxArticle Text

36402-1jaya_diudara, Author, Dataset.docxData Set

36403-1jaya_diudara, Author, research result.docxResearch Results

Download All Files

Pre-Review Discussions

Add discussion

Name	From	Last Reply	Replies	Closed
------	------	------------	---------	--------

Tahap 2
Revision required, 30 January 2023

Tulis

Kotak Masuk 149

Berbintang

Ditunda

Penting

Terkirim

Draf 17

Kategori

Selengkapnya

Label

[Imap]/Sent

[Imap]/Trash

Deleted Items

Sent Items

Telusuri email

RIA 18351 Kotak Masuk

editor.ria.iieta.org <editor.ria@iieta.org>
kepada saya, eyudhana@ee.uad.ac.id, sunardi@mti.uad.ac.id

Dear author,

We have reached a decision regarding your submission to Revue d'Intelligence Artificielle, "Application of Median and Mean Filtering Methods for Optimizing Face Detection in Digital Photo".

Our decision is: Revisions Required

1. Revise the current paper according to reviewers' comments. Highlight any change or track changes you make. Response to reviewers is also required.

2. Typeset your final paper according to the attached template.

Please return your revised manuscript and the response to reviewers to this e-mail before 5 February 2023. Thanks for your cooperation.

Editorial Board
Revue d'Intelligence Artificielle
<http://www.iieta.org/Journals/ria>
published by
International Information and Engineering Technology Association (IIETA)
<http://www.iieta.org/>

Review Comments


Application of Median and Mean Filtering Methods for Optimizing Face Detection in Digital Photo

In this paper, the authors used median and means filtering techniques to reduce noise in digital photographs, used a confusion matrix to quantify the median and means filtering methods' accuracy and used the parameters Mean Square Error (MSE) and Peak Noise to Signal Ratio (PNSR) to assess these approaches' performance. The research is of certain significance. The revise opinions are as follows:



1. In the introduction, the author should discuss the shortcomings of the existing research and explain the necessity of the research.
2. “The images utilized in this study are landscape photographs with descriptions of ten representative photographs with one face, ten representative photographs with two faces, and ten representative ...” The meaning of the words used in this sentence does not match the research content. Please check and correct the language problem in the paper.
3. “Examples of samples meeting three requirements are shown in Table 1 in accordance with the earlier description. In this study, 30 face pictures served as the sample.” Due to the diversity of the objects studied in this paper, the number of samples is obviously insufficient. It is suggested to add more samples to verify the calculation results.
4. “Figure 3 is an example of the features that affect the success rate. The features are f1, f2, and f3, and the weights are a1, a2, and a3, each feature is referred to as a weak classifier, whereas the strong classifier is the equation.” The equations and factors are the result of different dimensions, so the expression here needs to be modified.
5. “Max is an image's highest pixel value, which is often 255.” The pixel of the image is related to the device, so the value is given directly here, which is not correct. If this is the case in the study subjects, it needs to be explained.
6. “The classifier's filter order is considered weak in this context since it only accepts a limited number of accurate responses. Each step of filtering enhances the previously filtered image ...” This calculation method requires a lot of memory consumption, and the calculation error is large. Please make appropriate discussion at the end of the paper.

7. Figure 5 displays the findings after averaging the MSE and PNSR values. It is suggested to normalize the data in the figure so as to facilitate comparative analysis.
8. “Figure 4. MSE and PNSR average chart” The number is wrong, please modify it.
- The repetition rate of conclusion and abstract is too high. Please summarize the main conclusions and innovation points of the paper in the conclusion.

Tahap 3
Submit the revision, 02 February 2023

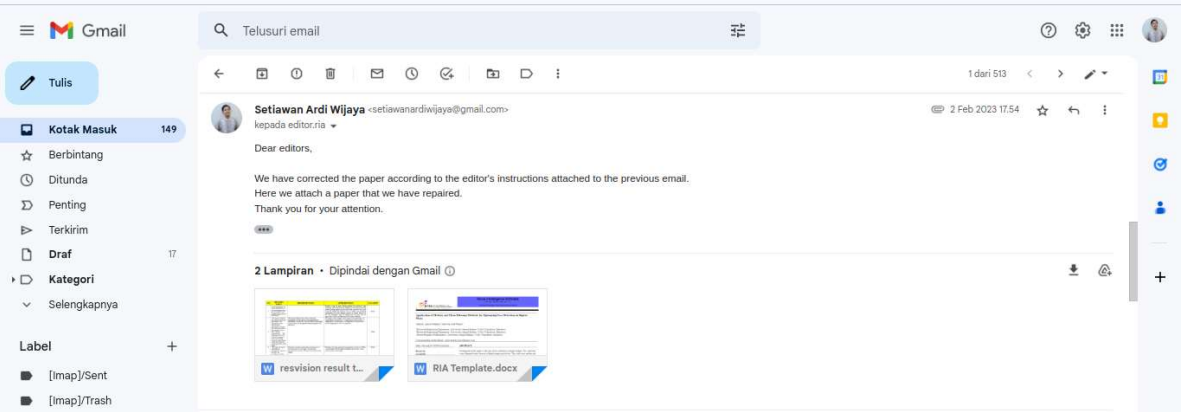

NO	REVISION POINT	BEFORE REVISION	AFTER REVISION	LOCATION
1	In the introduction, the author should discuss the shortcomings of the existing research and explain the necessity of the research.		Research using the mean filtering method had previously been conducted with a total of 30 test samples [5] and research using the median filtering method had previously been conducted with a total of 10 test samples [6]; however, the two studies were conducted independently and used different numbers of samples. Because of this, the researchers used 30 sample photos to assess the two approaches' viability and determine which one worked best.	Page 1
2	“The images utilized in this study are landscape photographs with descriptions of ten representative photographs with one face, ten representative photographs with two faces, and ten representative ...” The meaning of the words used in this sentence does not match the research content. Please check and correct the language problem in the paper.	The images utilized in this study are landscape photographs with descriptions of ten representative photographs with one face, ten representative photographs with two faces, and ten representative photographs with three faces.	The images used as samples in this study are clear landscapes, 10 sample photos with one face, 10 sample photos with two faces, 10 sample photos with three faces, 10 sample photos with four faces and 10 sample photos with 5 or more faces.	Page 2
3	“Examples of samples meeting three requirements are shown in Table 1 in accordance with the earlier description. In this study, 30 face pictures served as the sample.” Due to the diversity of the objects studied in this paper, the number of samples is obviously insufficient. It is	Examples of samples meeting three requirements are shown in Table 1 in accordance with the earlier description. In this study, 30 face pictures served as the sample.	Examples of samples meeting five requirements are shown in Table 1 in accordance with the earlier description. In this study, 50 face pictures served as the sample.	Page 2

	suggested to add more samples to verify the calculation results.			
4	“Figure 3 is an example of the features that affect the success rate. The features are f_1 , f_2 , and f_3 , and the weights are a_1 , a_2 , and a_3 , each feature is referred to as a weak classifier, whereas the strong classifier is the equation.” The equations and factors are the result of different dimensions, so the expression here needs to be modified.	Figure 3 is an example of the features that affect the success rate. The features are f_1 , f_2 , and f_3 , and the weights are a_1 , a_2 , and a_3 , each feature is referred to as a weak classifier, whereas the strong classifier is the equation.	Figure 3 is an example of the features that affect the success rate. The features are f_1 , f_2 , and f_n , and the weights are a_1 , a_2 , and a_n , each feature is referred to as a weak classifier, whereas the strong classifier is the equation.	Page 3
5	“Max is an image's highest pixel value, which is often 255.” The pixel of the image is related to the device, so the value is given directly here, which is not correct. If this is the case in the study subjects, it needs to be explained.	Max is an image's highest pixel value, which is often 255.”	The image utilized in this study has been transformed to a grayscale image, with an 8-bit bit depth and an intensity range of 0 to 255. White is represented by a number of 255 and black by a value of 0.	Page 3
6	“The classifier's filter order is considered weak in this context since it only accepts a limited number of accurate responses. Each step of filtering enhances the previously filtered image ...” This calculation method requires a lot of memory consumption, and the calculation error is large. Please make appropriate discussion at the end of the paper.		But this calculation method requires a lot of memory consumption, and the calculation error is large.	Page 4
7	Figure 5 displays the findings after averaging the MSE and PNSR values. It is suggested to normalize the data in the figure so as to facilitate comparative analysis.			Page 5
8	“Figure 4. MSE and PNSR average chart” The number is wrong, please modify it.	Figure 4. MSE and PNSR average chart	Figure 5. MSE and PNSR average chart	Page 5
9	The repetition rate of conclusion and abstract is too high. Please summarize the main conclusions and innovation points of the paper in the conclusion.	According to the study's findings, face detection in digital photographs can be successfully accomplished using the median and mean filtering techniques, 90% of the accuracy according to the confusion matrix, is proof of this. The lighting, the object's condition at the time of the photograph, and the supporting objects in the image can all affect the detection of other objects in certain sample photos that are not faces.	This study's result is that, in terms of accuracy and error, the median filtering approach outperforms the mean filtering method. The median filtering method had the lowest average MSE results, with a value of 12.65, and the highest PNSR value, with a value of 17.28, according to the findings of comparing the median and mean filtering methods using MSE and PNSR on 50 image samples. The fastest average time was obtained from the mean	Page 5-6

		According to the outcomes of comparing the median and mean filtering techniques using MSE and PSNR on 30 image samples, the median filtering method produced the lowest average MSE results with a value of 19.43, while the greatest PSNR value was also discovered there with a value of 13.74. The median filtering method yields the quickest average time, 3.89 seconds, as well. These results provide evidence that the median filtering approach outperforms the mean filtering method in terms of accuracy and error. However, these two techniques have been effectively employed to find people in digital pictures, and they both work well as a guide for face detection.	filtering method with a time of 3.18 seconds. The accuracy of the median and mean filtering methods, which is 90% based on the confusion matrix, shows that they are effective for face detection scenarios in digital photographs. These two techniques can be used as a guide for face detection because they have both been used successfully to find people in digital photographs.	
--	--	---	--	--

Application of Median and Mean Filtering Methods for Optimizing Face Detection in Digital Photo

Sunardi¹, Anton Yudhana², Setiawan Ardi Wijaya^{3*}

¹ Electrical Engineering Department, Universitas Ahmad Dahlan, 55164, Yogyakarta, Indonesia

² Electrical Engineering Department, Universitas Ahmad Dahlan, 55164, Yogyakarta, Indonesia

³ Master Program Of Informatics, Universitas Ahmad Dahlan, 55164, Yogyakarta, Indonesia

Corresponding Author Email: setiawanardiwijaya@gmail.com

<https://doi.org/10.18280/ria.xxxxxx>

ABSTRACT

Received:

Accepted:

Keywords:

Mean Filtering, Median Filtering, MSE, PNSR, Confusion Matrix

Locating the facial region is the aim of face detection in digital images. Face detection issues frequently arise because of digital image noise levels. This study uses median and means filtering techniques to reduce noise in digital photographs. A confusion matrix is used to quantify the median and means filtering methods' accuracy, while the parameters Mean Square Error (MSE) and Peak Noise to Signal Ratio (PNSR) are used to assess these approaches' performance. For this experiment, Viola-Jones was chosen as the face detection method since it is one of the face detection methods with the best accuracy and computational power. According to the outcomes of comparing the median and mean filtering techniques using MSE and PNSR on 50 image samples, the median filtering approach produced the lowest average MSE results, with a value of 19.43, and the median filtering procedure yielded a 13.74 value for the highest PNSR score. The fastest average time was obtained from the mean filtering method with a time of 3.18 seconds. As for the accuracy based on the confusion matrix, these two methods get a good accuracy of 90%. These findings indicate that the Median Filtering approach is superior to the Mean Filtering method in terms of error.

1. INTRODUCTION

The human face recognition system is very important in this era of very fast technological development [1,2]. The algorithm must first recognize the face before human face recognition [3,4]. However, issues frequently arise when it is determined that the image to be processed has a lot of noise. By using the Median and Mean Filtering methods and evaluating their viability for usage in the situation of face detection in digital photographs, this study resolves the issue at hand. Research using the mean filtering method had previously been conducted with a total of 30 test samples [5] and research using the median filtering method had previously been conducted with a total of 10 test samples [6]; however, the two studies were conducted independently and used different numbers of samples. Because of this, the researchers used 30 sample photos to assess the two approaches' viability and determine which one worked best. Because the median value of all previous values is used when replacing pixels, the median filtering approach was chosen because it effectively reduces noise in the image and produces a more focused image [7-9].

Since the Mean Filtering method effectively reduces picture noise and sharpens images by replacing pixel values with the average of all previous values, it was chosen [9-11]. Several criteria are employed in a confusion matrix to test the accuracy of this procedure, namely True Positive (TP), True Negative (TN), False Positive (FP), and False Negative (FN) making it easier during the calculation process [12-14]. Peak Noise to

Signal Ratio (PNSR) and Mean Square Error (MSE) are used to gauge the effectiveness of this technique. The better the results, which are inversely correlated with MSE and PNSR values, the smaller the MSE value and higher the PNSR value respectively [15-16]. MSE and PNSR were also chosen since they are simple to obtain and frequently utilized in research [17-21].

The Red Green Blue (RGB) image is input into the processing system as the first stage in the face detection process, after which the RGB image is transformed into a grayscale image [22-24]. The grayscale image is then subjected to filtering with the goal of lowering noise and improving the image so that it is simpler to process.

Viola-Jones is the technique used to find faces. This technique was chosen since it is an accurate face identification process with strong computing capabilities [3,25]. The Viola-Jones method selects the feature values for the Cascade Classifier using Integral Image and AdaBoost after using the Haar-like feature as a descriptor. Using this classifier, we can recognize faces in digital pictures [26,27].

The Joint Photographic Experts Group (JPEG) format, which uses a lossy compression method to degrade the quality of the image, was utilized to create the image for this study [28-30]. A camera that captures photos that are similar to the object's condition at the time of capture can record the reflection of an object as an image. The image was captured using the 13-megapixel and 5-megapixel Samsung A11 smartphone camera. The images used as samples in this study are clear landscapes, 10 sample photos with one face, 10

sample photos with two faces, 10 sample photos with three faces, 10 sample photos with four faces and 10 sample photos with 5 or more faces.

An Asus laptop with a core i3 CPU and 8 GB of memory was used for this study, along with the MATLAB a13 software and the Windows 10 pro operating system. Because MATLAB is accompanied with excellent mathematical software, graphics, and programming abilities, it is widely used. The application includes built-in features to carry out a variety of tasks [31-33].

There are four sections to this essay. The background of this study and a few relevant earlier investigations are presented in Section 1. Flowcharts and an explanation of the median and mean filtering techniques used for face detection in digital photographs are provided in Section 2. The results of tests using the mean filtering method are shown in Section 3. The use of median and mean filtering methods for face detection in digital photographs is then discussed in Section 4, with conclusions drawn about which approach is the most effective.

2. MATERIALS AND METHODS

2.1 Object of Research

A digital snapshot of a human face serves as the subject of the investigation. Research efforts aim to improve methods for identifying face objects in photographs. The images used as samples in this study are clear landscapes, 10 sample photos with one face, 10 sample photos with two faces, 10 sample photos with three faces, 10 sample photos with four faces and 10 sample photos with 5 or more faces. Table 1 provides examples of the photo samples that were used.

Table 1. Examples of sample photos used

No	Sample	Description
1		Camera: front camera Samsung A11 with 5 megapixels resolution Date: 15 November 2021, 8:04 PM File type: JPG 1,10 MB Size: 3264x1836 px
2		Camera: front camera Samsung A11 with 5 megapixels resolution Date: 16 January 2022, 4:26 PM File type: JPG 2,30 MB Size: 3264x1836 px
3		Camera: front camera Samsung A11 with 5 megapixels resolution Date: 10 September 2020, 1:29 PM File type: JPG 1,27 MB Size: 3264x1836 px
4		Camera: Samsung A11 with 13 megapixels resolution Date: 09 January 2023, 2:59 PM File type: JPG 2,27 MB Size: 4128x2322 px

5		Camera: Samsung A11 with 13 megapixels resolution Date: 31 December 2022, 3:13 PM File type: JPG 3,27 MB Size: 4128x2322 px
---	--	--

Examples of samples meeting five requirements are shown in Table 1 in accordance with the earlier description. In this study, 50 face pictures served as the sample.

2.2 Pre-processing

Pre-processing is a procedure used to improve the classification's precision and accuracy.

2.3 Filtering

Filtering is a process of improving the image to reduce the existing noise. Filtering used in this research are:

2.3.1 Median Filtering

This method sorts the pixel values to make it work from the smallest to the largest value based on eight neighbors as shown in Table 2, after which the middle value is taken [7-9].

Table 2. An example of eight adjacent pixels

P1	P2	P3
P8	f(y,x)	P4
P7	P6	P5

Mathematically, the filter can be equation (1) as follows:

Median(x, y) = P1, P2, P3, P4, P5, P6, P7, P8 (1)

After being sorted as in equation (1), the middle value is taken and the value in f(x, y) is replaced with that value.

2.3.2 Mean Filtering

This technique replaces the pixel values with an average of all the current values [10-9]. Table 2 provides a sample of 3x3 pixels and the equation to calculate them (2):

Mean(y, x) = 1/9 (P1,P2,P3,P4,P5,P6,P7,P8) (2)

So the initial value of f(y, x) is changed to the value that gets Mean(y, x).

2.4 Viola-Jones

In digital photographs, face characteristics are found using the Viola-Jones approach. There are four essential components to this approach, namely:

2.4.1 Haar-like Feature

Alfred Haar, a Hungarian mathematician, gave this characteristic its name in the 19th century. By showing a square with oppositely colored sides, occasionally having a lighter side on one side than the other, such as the brow's outer edge, one might identify traits that resemble those of Haar [26,27]. The center could be more reflective than the surrounding squares, giving the impression of a nose. The

Haar-like feature's dark and light sides are depicted in Figure 1.




Figure 1. Haar-like Feature

To aid the engine in understanding what a picture is, Figure 1 depicts the dark and light sides. Each characteristic will yield a single value, with the dark side being worth -1 and the light side being worth +1. For face detection, it is also essential to consider the horizontal and vertical parameters that describe the geometry of the machine's nose and eyebrows, respectively [26,27].

2.4.2 Integral Image

Because there will be more pixels in huge features in this part, the feature values are calculated carefully. To swiftly complete complex computations and demonstrate that the characteristics of a number of features meet the requirements, an integral picture is utilized [26,27]. An example of computing the integral image is provided in Figure 2.

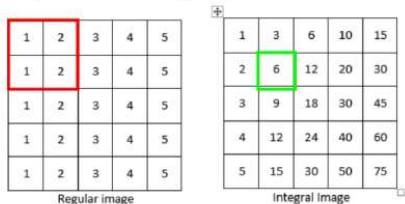


Figure 2. Integral image example

There are two images in Figure 2, a standard image and an integral image. By summing the values of the regular picture according to the red line in Figure 2 one can obtain the integral image value represented by the green line.

2.4.3 AdaBoost

In order to improve accuracy, this method can actually identify the FP and TN in the data from the supplied image [26,27].



Figure 3. Feature example

$$F(x) = a_1f_1(x) + a_2f_2(x) + \dots + a_nf_n(x) \tag{3}$$

Figure 3 is an example of the features that affect the success rate. The features are f_1 , f_2 , and f_n , and the weights are a_1 , a_2 , and a_n . each feature is referred to as a weak classifier, whereas the strong classifier is the equation. $F(x)$ to create a powerful classifier, two or three weak classifiers must be combined. Assemblies are what happen when something is added repeatedly, and this is how adaptive boosting works [26,27].

2.4.4 Cascaded Classifier

This classifier is a shortcut to improve the model's speed and accuracy. It begins by taking a sub-window, after which it selects the most crucial or ideal qualities, making sure that they

are present in the sub-image window. The sub-window won't be processed if there isn't one. If so, the sub-window will be rejected without the feature being used, and the number of features it has will continue. Cascading is utilized to speed up the machine's processing because this procedure takes a long time because it must be done for each feature [26,27].

2.5 Result Evaluation

Utilize a confusion matrix to evaluate the reliability of the mean filtering technique. This method makes the computation procedure simpler by measuring it using multiple criteria, including TP, TN, FP, and FN [12,14]. Here is equation (4) to calculate accuracy:

$$accuracy = \frac{TP+TN}{TP+TN+FP+FN} \tag{4}$$

PNSR and MSE are used to gauge the effectiveness of this technique. The better the results, which are inversely correlated with MSE and PNSR values, greater the PNSR value and lower the MSE value, respectively [15,16]. Here is equation (5) for MSE:

$$MSE = \frac{\sum_{x=0}^{X-1} \sum_{y=0}^{Y-1} (M(a,b) - N(a,b))^2}{x \times y} \tag{5}$$

$N(a, b)$ is the reference image, and $M(a, b)$ is the value of the filtered image. The highest power signal to greatest power noise ratio is known as the PNSR [16]. The equation (6) for PNSR is as follows.

$$PSNR = 10 \log_{10} \frac{Max_i^2}{MSE} \tag{6}$$

Max_i is the highest pixel value in an image. The image utilized in this study has been transformed to a grayscale image, with an 8-bit bit depth and an intensity range of 0 to 255. White is represented by a number of 255 and black by a value of 0.

2.6 Proposed Method

The approach suggested in this study uses mean filtering to find faces in digital pictures. Figure 4 shows the flowchart for this study methodology.

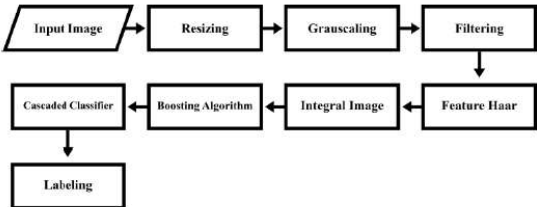


Figure 4. Research flow

- 1) Put images into MATLAB, the program used to process images.
- 2) In order to expedite processing, the initial photo is resized during the resizing stage.

3) Use the grayscale procedure to transform RGB-format photographs into grayscale. Utilize the following formula to turn the RGB image to grayscale:

$I_y = 0.333Fr + 0.5Fg + 0.1666Fb$ (7)

While I_y is the intensity of gray, which is similar to an RGB level image the intensity of Red is Fr , the intensity of Green is Fg , and the intensity of Blue is Fb .

4) To reduce the noise in the image, enhance it using median or mean filtering techniques.

5) It is easy to categorize photographs based on feature values. There are a number of benefits to using features rather than pixels directly. If the function allows for the encoding of ad-hoc domain knowledge, which is difficult to recognize with little training data, that would be a very tenable explanation.

6) The integral image approach reduces the computation of the original value of each Haar-like feature at each picture position. The phrase "overall integral" refers to the weighted pixel values that will be added to the source image.

7) Weighting the representations of weak classifiers allows the boosting solution technique to merge numerous weak classifiers into strong classifiers.

8) Weights the weak classifier and combines a number of weak classifiers to create a stronger classifier. The classifier's filter order is considered weak in this context since it only accepts a limited number of accurate responses. Each step of filtering enhances the previously filtered image. If one of these filters fails, the region in the image is marked as "non-face." But this calculation method requires a lot of memory consumption, and the calculation error is large.

9) The face is then marked with a red line after the image has been converted into a matrix value using a method to locate the area.

3. EXPERIMENTAL RESULTS

50 images were utilized in this investigation, including 10 sample photos with one face, 10 sample photos with two faces, 10 sample photos with three faces, 10 sample photos with four faces and 10 sample photos with 5 or more faces.

The image was captured using the 13-megapixel main camera and 5-megapixel front camera on the Samsung A11 smartphone. The Median and Mean Filtering techniques were examined at this point. The MATLAB software with hardware support for an Intel(R) Core(TM) i3-5005U CPU running at 2.00GHz and 8 GB of RAM was used for the tests.

The following is an example of the results obtained based on the three criteria used, an example of the results is presented in table 3 below.

Table 3. An Example of the Results Obtained

No	Samples	Method	Result
1		Median	TP
			MSE: 0.95
			PNSR: 24.28
		Mean	Speed: 3.01s
			TP
			MSE: 14.92
			PNSR: 12.33
			Speed: 3.61s


2		Median	TN
			MSE: 57.44
		Mean	PNSR: 6.47
			Speed: 3.60s
3		Median	TP
			MSE: 1.15
		Mean	PNSR: 23.46
			Speed: 4.64s
4		Median	TP
			MSE: 0.29
		Mean	PNSR: 30.96
			Speed: 1.92s
5		Median	TN
			MSE: 7.52
		Mean	PNSR: 15.30
			Speed: 1.87s
			TP
			MSE: 1.15
			PNSR: 20.26
			Speed: 2.00s
			TP
			MSE: 23.94
			PNSR: 10.27
			Speed: 2.03s

Table 3 displays the outcomes of processing three sample criteria from Table 1 using the median and mean filtering procedures. Table 4 below shows the full findings for the 50 samples.

Table 4. Results MSE and PNSR

No	Method	Description	MSE	PNSR	Speed (s)
1	Median	TP	0.95	24.28	3.01
	Mean	TP	14.92	12.33	3.61
2	Median	TP	7.63	15.24	3.91
	Mean	TP	19.59	11.15	4.90
3	Median	TN	4.23	17.80	3.93
	Mean	TN	11.79	13.35	4.88
4	Median	TN	9.90	14.11	3.82
	Mean	TN	20.00	11.05	4.66
5	Median	TP	4.92	17.15	3.55
	Mean	TN	13.13	12.88	4.36
6	Median	TP	16.31	11.94	3.87
	Mean	TP	33.05	8.87	4.78
7	Median	TN	19.01	11.28	3.91
	Mean	TN	35.35	8.58	4.90
8	Median	TN	30.98	9.15	3.92
	Mean	TN	51.58	6.94	4.88
9	Median	TP	8.60	14.72	4.12
	Mean	TP	16.13	11.99	5.13
10	Median	TN	7.01	15.60	3.26
	Mean	TN	19.56	11.15	4.04
11	Median	TN	57.44	6.47	3.60
	Mean	TN	90.53	4.50	3.62
12	Median	TP	50.75	7.01	4.54
	Mean	TP	72.96	5.43	4.54
13	Median	TP	0.87	24.65	3.85
	Mean	TN	9.33	14.37	3.72

14	Median	TN	11.96	13.29	3.47
	Mean	TN	23.39	10.38	3.50
15	Median	TN	5.59	16.58	3.83
	Mean	TN	21.31	10.78	3.85
16	Median	TP	15.84	12.07	3.67
	Mean	TP	31.73	9.05	3.64
17	Median	TP	15.29	12.22	9.98
	Mean	TN	27.41	9.69	3.89
18	Median	TP	14.08	12.58	3.67
	Mean	TP	30.98	9.16	3.53
19	Median	TN	45.60	7.48	4.85
	Mean	TP	66.66	5.83	4.78
20	Median	TP	0.94	24.33	3.96
	Mean	TP	10.55	13.83	3.71
21	Median	TN	52.33	6.88	0.79
	Mean	TN	124.19	3.12	0.66
22	Median	FP	8.26	14.89	3.41
	Mean	FP	26.01	9.91	3.39
23	Median	TP	1.15	23.46	4.64
	Mean	TP	11.63	13.41	3.55
24	Median	TN	61.70	6.16	4.51
	Mean	TP	102.95	3.94	3.46
25	Median	TP	29.22	9.41	2.35
	Mean	TP	48.11	7.24	1.74
26	Median	TP	9.49	14.79	7.19
	Mean	TP	19.59	11.15	2.91
27	Median	FP	10.07	14.04	4.80
	Mean	FP	12.47	13.11	6.66
28	Median	TN	50.92	6.99	5.70
	Mean	TN	74.18	5.36	5.71
29	Median	FP	28.27	9.55	2.33
	Mean	FP	44.80	7.55	1.70
30	Median	TP	3.57	18.54	3.20
	Mean	TP	15.11	12.27	3.12
31	Median	TP	5.97	16.31	1.69
	Mean	TN	31.88	9.03	2.68
32	Median	TP	8.58	14.73	1.70
	Mean	TP	45.36	7.50	1.64
33	Median	TN	1.11	23.61	1.77
	Mean	TN	14.24	12.53	1.60
34	Median	TP	7.45	15.35	2.57
	Mean	TP	45.36	7.50	2.42
35	Median	TN	0.82	24.91	2.43
	Mean	TP	16.21	11.97	2.38
36	Median	TP	1.60	22.02	2.27
	Mean	TP	16.21	11.97	2.08
37	Median	TN	1.95	21.16	2.17
	Mean	TN	22.20	10.60	2.09
38	Median	FP	0.74	25.39	2.07
	Mean	FP	7.29	15.44	1.96
39	Median	TN	0.20	30.96	1.92
	Mean	TN	7.52	15.30	1.87
40	Median	TN	2.34	20.38	2.29
	Mean	TN	13.68	12.71	2.14
41	Median	TN	3.97	18.08	2.18
	Mean	TN	23.47	10.36	2.17
42	Median	TN	7.91	15.09	3.97
	Mean	TN	43.02	7.73	2.18
43	Median	TN	1.13	23.53	2.01
	Mean	TN	14.09	12.57	2.01
44	Median	TN	0.54	26.73	1.97
	Mean	TN	9.66	14.22	1.95
45	Median	TN	1.07	23.77	1.99
	Mean	TP	15.76	12.09	1.94
46	Median	TP	0.24	30.34	1.94
	Mean	TN	8.66	14.69	1.91
47	Median	TN	0.42	27.87	1.97
	Mean	TP	7.92	15.08	1.98
48	Median	FP	0.56	26.60	1.93
	Mean	FP	10.30	13.94	1.89
49	Median	TP	0.84	24.80	2.20
	Mean	TN	13.96	12.62	2.15
50	Median	TP	2.40	20.26	2.00
	Mean	TP	23.94	10.27	2.03

The outcomes of the median and mean filtering are quite important. The outcomes were achieved using median filtering with three criteria from 50 sample photos, the face in the image was recognized in the first 22 samples using TP information, and the second 23 samples with TN information, The third 5 samples with FP description, namely the face in the image, failed to be detected while other objects were discovered, despite the face in the image being detected. The first 21 samples having TP information, which allowed for the detection of faces in images, yielded the best results for mean filtering, the face in the image was detected in the second 24 samples with TN information, although other objects were also detected; the face in the image was not detected in the third 5 samples with FP information. This can happen as a result of the lighting, the object's state at the time of the photo, and the supporting items in the image. Determine the two filtering algorithms' accuracy using the confusion matrix as follows:

$$accuracy\ median = \frac{TP + TN}{TP + TN + FP + FN} = \frac{22 + 23}{22 + 23 + 5} = \frac{45}{50} = 0.9 = 90\%$$

$$accuracy\ mean = \frac{TP + TN}{TP + TN + FP + FN} = \frac{21 + 24}{22 + 24 + 5} = \frac{45}{50} = 0.9 = 90\%$$

Both filtering techniques have a high accuracy of 90% based on median and mean accuracy, however, as median filtering receives more TP criteria than mean filtering in this instance, it is superior. Figure 5 displays the findings after averaging the MSE and PNSR values.

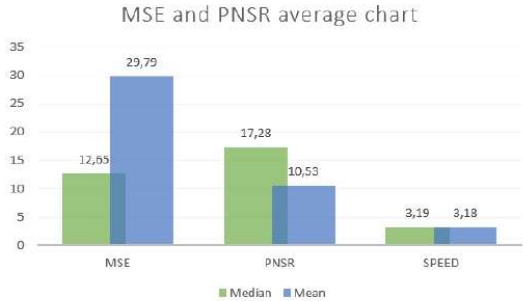


Figure 5. MSE and PNSR average chart

Based on Figure 5, the average results of MSE and PNSR calculations were obtained from the median and mean filtering methods. If we look at the average of the 50 samples, the lowest MSE score is found in the median filtering method with a value of 12.65, while the highest average PNSR value is also found in the median filtering method with a value of 17.28. The fastest average time was obtained from the mean filtering method with a time of 3.18 seconds. Based on these results it can be concluded that the Median Filtering method is better than the mean filtering method in terms of accuracy and error. Even so, both of these methods can be used and worked well in this study.

4. CONCLUSION

This study's result is that, in terms of accuracy and error, the median filtering approach outperforms the mean filtering method. The median filtering method had the lowest average MSE results, with a value of 12.65, and the highest PNSR

value, with a value of 17.28, according to the findings of comparing the median and mean filtering methods using MSE and PNSR on 50 image samples. The fastest average time was obtained from the mean filtering method with a time of 3.18 seconds. The accuracy of the median and mean filtering methods, which is 90% based on the confusion matrix, shows that they are effective for face detection scenarios in digital photographs. These two techniques can be used as a guide for face detection because they have both been used successfully to find people in digital photographs.

ACKNOWLEDGMENT


This research was supported and funded by Institute of Research and Community Services (LPPM) Universitas Ahmad Dahlan, Yogyakarta, Indonesia.

REFERENCES

- [1] A. Eleyan and M. S. Anwar, "Multiresolution Edge Detection Using Particle Swarm Optimization," *Int. J. Eng. Sci. Appl.*, vol. 1, no. 1, pp. 11–17, 2017.
- [2] M. R. Wankhade and N. M. Wagdarikar, "Feature Extraction of Edge Detected Images," *Int. J. Comput. Sci. Mob. Comput.*, vol. 6, no. 6, pp. 336–345, 2017.
- [3] M. V. Alyushin, V. M. Alyushin, and L. V. Kolobashkina, "Optimization of the data representation integrated form in the viola-jones algorithm for a person's face search," *Procedia Comput. Sci.*, vol. 123, pp. 18–23, 2018, doi: 10.1016/j.procs.2018.01.004.
- [4] N. T. Deshpande and S. Ravishankar, "Face Detection and Recognition using Viola-Jones algorithm and fusion of LDA and ANN," *IOSR J. Comput. Eng.*, vol. 18, no. 6, pp. 1–6, 2016, [Online]. Available: <https://pdfs.semanticscholar.org/c5cf/c1f5a430ad9c103b381d016adb4cba20ce4e.pdf>
- [5] S. Sunardi, A. Yudhana, and S. A. Wijaya, "Penerapan Metode Median Filtering untuk Optimasi Deteksi Wajah pada Foto Digital," *J. Innov. Inf. Technol. Appl.*, vol. 4, no. 1, pp. 51–60, 2022, doi: doi.org/10.35970/jinita.v4i1.1214.
- [6] S. Sunardi, A. Yudhana, and S. Ardi, "Application of Mean Filtering Method for Optimizing Face Detection in Digital Photos," *Int. J. Artif. Intell. Res.*, vol. 6, no. 2, 2022, doi: 10.29099/ijair.v6i2.307.
- [7] A. Kaur, "Mingle Face Detection using Adaptive Thresholding and Hybrid Median Filter," *Int. J. Comput. Appl.*, vol. 70, no. 10, pp. 13–17, 2013, doi: 10.5120/11997-7883.
- [8] R. Al-taie, B. Saleh, and H. Abu-Asaad, "A REVIEW PAPER : DIGITAL IMAGE FILTERING PROCESSING," *Technium*, vol. 3, no. 9, pp. 1–11, 2021.
- [9] S. A. Shaban and D. L. Elsheweikh, "Blood group classification system based on image processing techniques," *Intell. Autom. Soft Comput.*, vol. 31, no. 2, pp. 817–834, 2022, doi: 10.32604/iasc.2022.019500.
- [10] R. Kumar, C. Shao, and P. Kaur, "An improved adaptive weighted mean filtering approach for metallographic image processing," *J. Intell. Syst.*, vol. 30, no. 1, pp. 470–478, 2021, doi: 10.1515/jisys-2020-0080.
- [11] J. Choudhary and A. Choudhary, "Enhancement in Morphological Mean Filter for Image Denoising Using GLCM Algorithm," *Int. J. Comput. Theory Eng.*, vol. 13, no. 4, pp. 134–137, 2021, doi: 10.7763/ijcte.2021.v13.1302.
- [12] S. Maharani, H. Ridwanto, H. Rahmania Hatta, D. Marisa Khairina, and M. Rivani Ibrahim, "Comparison of TOPSIS and MAUT methods for recipient determination home surgery," *LAES Int. J. Artif. Intell.*, vol. 10, no. 4, pp. 930–937, 2021, doi: 10.11591/ijai.v10.i4.pp930-937.
- [13] K. Jankowska and P. Ewert, "Effectiveness Analysis of Rolling Bearing Fault Detectors Based On Self-Organising Kohonen Neural Network – A Case Study of PMSM Drive," *Power Electron. Drives*, vol. 6, no. 1, pp. 100–112, 2021, doi: 10.2478/pead-2021-0008.
- [14] V. Balaji and S. K. S. Raja, "Recommendation learning system model for children with autism," *Intell. Autom. Soft Comput.*, vol. 31, no. 2, pp. 1301–1315, 2022, doi: 10.32604/iasc.2022.020287.
- [15] D. G. Chachlakis, T. Zhou, F. Ahmad, and P. P. Markopoulos, "Minimum Mean-Squared-Error autocorrelation processing in coprime arrays," *Digit. Signal Process. A Rev. J.*, vol. 114, p. 103034, 2021, doi: 10.1016/j.dsp.2021.103034.
- [16] P. Pinki and R. Mehra, "Estimation of the Image Quality under Different Distortions," *Int. J. Eng. Comput. Sci.*, vol. 5, no. 17291, pp. 17291–17296, 2016, doi: 10.18535/ijecs/v5i7.20.
- [17] D. Umamaheswari and E. Karthikeyan, "Comparative analysis of various filtering techniques in image processing," *Int. J. Sci. Technol. Res.*, vol. 8, no. 9, pp. 109–114, 2019.
- [18] M. A. Abdillahi, A. Yudhana, and A. Fadlil, "Compression Analysis Using Coiflets, Haar Wavelet, and SVD Methods," *JUITA J. Inform.*, vol. 9, no. 1, p. 43, 2021, doi: 10.30595/juita.v9i1.8559.
- [19] E. A. Pambudi, E. S. Wijaya, and A. Fauzan, "Improved Sauvola Threshold for Background Subtraction on Moving Object Detection," *Int. J. Softw. Eng. Comput. Syst.*, vol. 5, no. 2, pp. 78–89, 2019, doi: 10.15282/ijsecs.5.2.2019.6.0062.
- [20] N. Senthilkumaran and S. Vaithegi, "Image Segmentation By Using Thresholding Techniques For Medical Images," *Comput. Sci. Eng. An Int. J.*, vol. 6, no. 1, pp. 1–13, 2016, doi: 10.5121/cseij.2016.6101.
- [21] A. Kaur, U. Rani, and G. S. Josan, "Modified Sauvola binarization for degraded document images," *Eng. Appl. Artif. Intell.*, vol. 92, no. March, p. 103672, 2020, doi: 10.1016/j.engappai.2020.103672.
- [22] A. Yudhana, Sunardi, and S. Saifullah, "Segmentation comparing eggs watermarking image and original image," *Bull. Electr. Eng. Informatics*, vol. 6, no. 1, pp. 47–53, 2017, doi: 10.11591/eei.v6i1.595.
- [23] Hongmei Li, Yiping Cao, Yingying Wan, Cai Xu, Hechen Zhang, Haihua An, Haitao Wu, "An improved temporal phase unwrapping based on super-grayscale multi-frequency grating projection," *Opt. Lasers Eng.*, vol. 153, 2022, [Online]. Available: <https://doi.org/10.1016/j.optlaseng.2022.106990>.
- [24] J. W. Yoo and K. S. Lee, "Usefulness of grayscale values measuring hypoechoic lesions for predicting prostate cancer: An experimental pilot study," *Prostate Int.*, vol. 10, no. 1, pp. 28–33, 2022, doi: 10.1016/j.pmi.2021.11.002.
- [25] P. Irgens, C. Bader, T. Lé, D. Saxena, and C. Ababei, "An efficient and cost effective FPGA based implementation of the Viola-Jones face detection algorithm," *HardwareX*, vol. 1, pp. 68–75, 2017, doi: 10.1016/j.ohx.2017.03.002.
- [26] P. Viola and M. Jones, "Rapid Object Detection Using a Boosted Cascade of Simple Features," in *Proceedings of the 2001 IEEE Computer Society Conference on Computer Vision and Pattern Recognition*, 2001, pp. 1–1. doi: 10.1109/CVPR.2001.990517.
- [27] P. Viola and M. Jones, "Robust Real-Time Face Detection," *Int. J. Comput. Vis.*, vol. 57, pp. 137–154, 2004, doi: <https://doi.org/10.1023/B:VISI.0000013087.49260.fb>.
- [28] I. Riadi, A. Fadlil, and T. Sari, "Image Forensic for detecting Splicing Image with Distance Function," *Int. J. Comput. Appl.*, vol. 169, no. 5, pp. 6–10, 2017, doi: 10.5120/ijca2017914729.
- [29] M. Zairi, T. Boujiha, and A. Ouelli, "Improved JPEG image watermarking in data compression domain using block

- selection strategy,” *EAI Endorsed Trans. Internet Things*, vol. 6, no. 24, pp. 1–7, 2021, doi: 10.4108/eai.8-2-2021.168690.
- [30] S. Battiato, O. Giudice, F. Guamera, and G. Puglisi, “Estimating Previous Quantization Factors on Multiple JPEG Compressed Images,” *Eurasip J. Inf. Secur.*, vol. 2021, no. 8, pp. 1–11, 2021, doi: 10.1186/s13635-021-00120-7.
- [31] S. Attaway, *Introduction to MATLAB*. 2019. doi: 10.1016/b978-0-12-815479-3.00001-5.
- [32] A. Vagga, S. Aherrao, H. Pol, and V. Borkar, “Flow visualization by Matlab® based image analysis of high-speed polymer melt extrusion film casting process for determining necking defect and quantifying surface velocity profiles,” *Adv. Ind. Eng. Polym. Res.*, vol. 5, no. 1, pp. 1–11, 2021, doi: 10.1016/j.aiepr.2021.02.003.
- [33] M. Coblenz, “MATVines: A vine copula package for MATLAB,” *SoftwareX*, vol. 14, p. 100700, 2021, doi: 10.1016/j.softx.2021.100700.

Tahap 4
Accepted, 07 February 2023

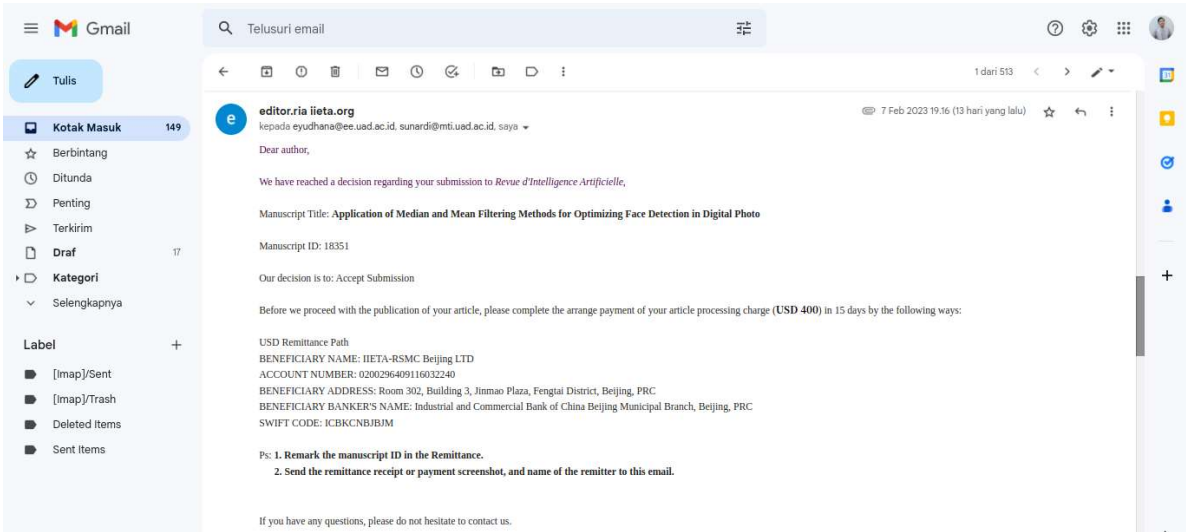

International Information & Engineering
Technology Association
#2020, Scotia Place Tower One, 10090 Jasper Avenue, Edmonton,
AB T5J 3R8, Canada
Tel: +1 780 218 9920; Fax: +1 780 341 0800
www.iieta.org



IIETA International Information and
Engineering Technology Association
Advancing the World of Information and Engineering

Acceptance Letter
Revue d'Intelligence Artificielle

February 7, 2023

Setiawan Andi Wijaya

Master Program Of Informatics,
Universitas Ahmad Dahlan, 55164,
Yogyakarta, Indonesia

Dear Sunardi, Anton Yudianto, Setiawan Andi Wijaya

MS: Application of Median and Mean Filtering Methods for Optimizing Face Detection in Digital Photo

I am pleased to inform you that as per the recommendation of the editorial board, your above-mentioned manuscript has been accepted for publication in Revue d'Intelligence Artificielle (ISSN 0992-499X).

Please note the following points, and ensure compliance:

- 1) Page Proofs of your paper will also be sent to you for minor corrections and approval.
- 2) Provide us with your E-mail ID for future correspondence.
- 3) Provide complete postal address with correct postal code.
- 4) The corresponding author would receive a PDF of the published paper.
- 5) If your paper is found with plagiarism content after the release of Acceptance Letter, it will not be published in the Journal.

It is recommended that you cite this and other published works from International Information and Engineering Technology Association (www.iieta.org) in your papers to be published in other journals.

Yours sincerely,



Date: February 7, 2023
Place: Edmonton, Canada

Tahap 5a
Editing Process, 24 February 2023

UNIVERSITAS
AHMAD DAHLAN

Sunardi sunardi <sunardi@mti.uad.ac.id>

RIA 18351

editor.ria iieta.org <editor.ria@iieta.org>
To: "setiawanardiwijaya@gmail.com" <setiawanardiwijaya@gmail.com>
Cc: "eyudhana@ee.uad.ac.id" <eyudhana@ee.uad.ac.id>, "sunardi@mti.uad.ac.id" <sunardi@mti.uad.ac.id>

Fri, Feb 24, 2023 at 10:29 AM

Dear author,

Please check the attached files and follow the requirements:

1. Please download the attachment we sent you, and modify your article according to our mark based this version. Please **highlight** any change you make.
2. Please fill in "**Copyright Transfer Agreement**". Please note that "**corresponding author's signature**" in the agreement shall be manually signed.
3. Please supply all authors' ORCID.

To ensure fast publication of your paper, please return your revised manuscript and the answers to all queries to this e-mail **before 24-25 February 2023**. Thus, we have enough time to process your manuscript in the next step. For further assistance, please do not hesitate to contact us via this e-mail.

Editorial Board
Revue d'Intelligence Artificielle
<http://www.iieta.org/Journals/RIA>
published by
International Information and Engineering Technology Association (IIETA)
<http://www.iieta.org/>

Tahap 5b
Editing Process, 28 February 2023

UNIVERSITAS
AHMAD DAHLAN

Sunardi sunardi <sunardi@mti.uad.ac.id>

RIA 18351

editor.ria iieta.org <editor.ria@iieta.org>
To: "setiawanardiwijaya@gmail.com" <setiawanardiwijaya@gmail.com>
Cc: "eyudhana@ee.uad.ac.id" <eyudhana@ee.uad.ac.id>, "sunardi@mti.uad.ac.id" <sunardi@mti.uad.ac.id>

Tue, Feb 28, 2023 at 8:16 AM

Dear author,

Before publication, it is decided that this final proof should be sent to the authors once again for careful reading and re-check, to rule out the mistakes / errors of all kinds.

Download "final proof". Read it carefully with particular reference to the following points:

1. If some corrections are left out, highlight them and attach notes on how to correct directly in the PDF file.
2. Check with care all the symbols in the text.

Please return the corrected final proof before **February 28-29 2023**.

It is our mutual responsibility that the academic works published in the journal should be "mistake or error free" and of quality as well. Our attention and efforts to this would make the journal still better, besides enhancing the utility of your published research.

