

HASIL CEK_PRODUCTION OF BIOETHANOL FROM SARGASSUM CRASSIFOLIUM USING SELLULASE ENZYMES FROM TRICHODERMA RESEEI AND ASPERGILLUS NIGER

by Universitas Ahmad Dahlan Yogyakarta 42

Submission date: 22-Nov-2023 03:10PM (UTC+0700)

Submission ID: 2236003102

File name: LULASE_ENZYMES_FROM_TRICHODERMA_RESEEI_AND_ASPERGILLUS_NIGER.pdf (123.66K)

Word count: 1637

Character count: 9005

**PRODUCTION OF BIOETHANOL FROM *SARGASSUM CRASSIFOLIUM*
USING SELLULASE ENZYMES FROM *TRICHODERMA RESEEI* AND
*ASPERGILLUS NIGER***

**Trianik Widyaningrum^{1,2}, Indro Prastowo^{1,4},
Masreza Parahadi³, Eka Indriyanti¹**

Department of Biology Education, Faculty of Teacher Training and Education¹,
Ahmad Dahlan University, Department of Biology, Faculty of Mathematics and Natural
Sciences, Brawijaya University², Department of Postgraduate Program in Biotechnology,
Postgraduate School, Gadjah Mada University³, Nitidipuran Life Science Studio⁴
(trianikwidyaningrum@gmail.com)¹, (indro.prastowo25@gmail.com)⁴,
(reza.hadi7@gmail.com)³

Abstract

Indonesia has the potential as the world's largest bioethanol producer. The efforts to produce bioethanol using non-crop raw material are recently developed. *Sargassum crassifolium* is a promising raw material for biofuel production since containing a high concentration of polysaccharides. The purpose of this study to determine *Sargassum crassifolium* bioethanol production by using enzymes from *Trichoderma reesai* and *Aspergillus niger*. Pre-treatment of *Sargassum crassifolium* at working pressure of 15 Psi, temperature of 121 °C and sulphuric acid concentration of 0.2 M increased the reducing sugars concentration up to 0,000558 mg/L. The application of cellulase enzymes from *Trichoderma reesai* and *Aspergillus niger* (3:1) helped increasing the reducing sugars concentration up to 1031,67 mg/L. Fermentation using a naturally yeast, *Saccharomyces cereviceae* (JCM 3012) (0.15 g/mL), produced bioethanol up to 0,727 % during fermentation that assisted the degradation of *Sargassum crassifolium*.

Key words: Bioethanol, cellulase, *Sargassum crassifolium*, *Trichoderma sellulase reesai* and *Aspergillus niger*

Introduction

Indonesia is a country with high energy consumption in the world. Indonesia is quite high energy consumption nearly 95% met by fossil fuels. Of the total, nearly 50% of it is fuel oil (BBM). Fuel consumption is high enough to be a problem for Indonesia. As a non-renewable energy sources, fuel reserves are limited (ESDM, 2012). One of the alternative energy that can replace petroleum fuel is bioethanol.

According to Sari *et al.*, (2014), many studies reveal that waste containing cellulose can be used as a source of sugar that is inexpensive and easy to replace starch material in the fermentation process. High cellulose content in the *Sargassum sp.* can be used as feedstock to produce bioethanol. *Sargassum sp.* many contain polysaccharide alginate used for industrial food and beverage, cosmetic and pharmaceutical.

Other polysaccharide is cellulose. Cellulose degradation process can be done chemically or biologically using cellulolytic organisms derived from bacteria or fungi, degradation of cellulose into simple sugars either cellobiose or glucose with the aid of a catalyst. Enzymatic hydrolysis using cellulase enzymes. Cellulase enzymes can be produced from microbial Selulolitik of fungi and bacteria. Selulolitik mushroom commonly used of the type *Trichoderma* and *Aspergillus*. The purpose of this study was to determine the production of bioethanol from Fermentation of *Sargassum* with an enzyme produced by *T.reesai* and *A.niger* (Kasmiran Ariani dan Tarmizi. 2012, Pujiarti *et.al*, 2012)

Research methods

Cultivation *T.reesei* and *A. niger*

Growth of *T. reesei* and *A. niger* using a PDA (Potato Dextrose Agar). The first step: PDA boiled, after boiling sterilized using an autoclave for 15 minutes, and let cool then each mushroom cultivated on PDA using a wire loop, then incubated at room temperature for 7 days in a petri dish (Safaria *et al.*, 2013).

Preparation of Sargassum sp.

Sargassum sp. taken on the beach Krakal Gunung Kidul then the sample is washed with fresh water, and dried in the sun, but not exposed to direct sunlight. After drying, the samples blended, to form a powder.

Hydrolysis Sargassum sp.

3 Sargassum powder sp.10 g put into erlenmeyer, and soaking H₂SO₄ at a concentration of 0.2 M, 0.3 M, 0.4 M, 0.5M. Then the samples were stored 120 minutes and the initial pH was measured and adjusted to pH neutral (7) (Saputra, 2012).

Preparation of a solution of tween 80%

Tween solution 1mL 80% reconstituted with 1 liter of distilled water. Tween 80% solution serves as a non-ionic surfactant that can reduce the surface tension between the water and the spores *T.reesei* and *A.niger*. (Safaria *et al.*, 2013).

Cellulase enzyme production

Cellulase enzyme production begins by mixing 10 grams of powder Sargassum sp., 25 mL nutrient solution, *T.reesei*, *A. niger* and 80% tween solution into erlenmeyer 250 mL, then covered with cotton and covered with aluminum foil, incubated for 1 day at 37 °C and then centrifuged to get the enzyme cellulase.

Bioethanol production

Bioethanol production is done by mixing the powder of Sargassum, with 25 mL nutrient solution, *T.reesei* and *A. niger* and allowed to stand for 24 hours and then given a 15% *Saccharomyces cerevisiae* and the fermented 3 days.

Measuring levels of Bioethanol

Bioethanol content measurement is done using Gas Chromatography (GC-14B) Shimadzu FID system. (Febriani *et al.*, 2014).

Result and Discussion

Table 1. Result of Sugar reduction

<i>Sargassum sp.</i> with H ₂ SO ₄	Test Glukosa (µg/g)	Test Fruktosa (µg/g)	Test Sukrosa (µg/g)
0,2 M	557,79	225,62	622,59
0,3 M	226,57	236,77	304,70
0,4 M	378,56	200,28	251,57
0,5 M	<4,2	200,38	<2,9

The content of glucose, sucrose, and fructose at the lowest concentrations of H₂SO₄ 0.5M this case due to the increased concentration of the acid hydrolysis process results in glucose and other glucose compounds to be much degraded. Time used in hydrolysis of H₂SO₄ is 120 minutes because the longer the time of hydrolysis the higher the glucose levels obtained (Saputra *et al.*, 2012)

Table 2. Level of Bioethanol

<i>Trichoderma reesei</i> and <i>Aspergillus niger</i>	Replikasi 1 (%)	Replikasi 2 (%)	Rates Level of Bioetanol (%)
0:1	0,1567	0,1554	0,1560
1:1	0,1254	0,1460	0,1357
1:0	0,1788	0,1590	0,1689
1:3	0,1340	0,1329	0,1334
3:1	0,6760	0,7789	0,7274
2:1	0,1097	0,1096	0,1096
1:2	0,1739	0,1816	0,1777

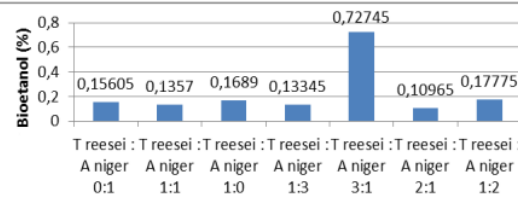


Figure 1. The Level of Bioethanol

The highest levels of ethanol at a concentration of T. reesei: A. niger 3: 1 with an average of 0.7274%, it is because the enzyme cellulase from T. reesei and A. niger higher can turn cellulose into glucose, thus increasing levels of bioethanol fermented with *S.cerevisiae*. (Khaira *et al.*, 2015, Gunam *et.al*, 2010). Bioethanol lowest levels found in T. reesei: A. niger 2: 1 with the average value was 0.1096%, this is because the enzymes contained in T. reesei a bit so it is not able to change cellulose into glucose, so the lower bioethanol fermentation results, It fits Zely opinion (2014), T. reesei to produce endoglucanase and exoglucanase 80% but lower β -glucosidase so the main product instead of glucose, but cellobiose hydrolysis. While required in bioethanol production is fermentation of glucose by *S.cerevisiae* convert glucose into ethanol.

4. Conclusion

Based on the results of this study concluded that the highest amount of bioethanol production in the treatment T. reesei: A. niger 3: 1 with a bioethanol content of 0.7274%

5. Acknowledgements

In this opportunity, authors would like to thank to The Ministry of Research, Technology and Higher Education of Republic Indonesia for funding this research through The 2015 Annual Competitive Research Grant (Hibah Bersaing 2015).

6. References

- ESDM. (2012) *Laju Eksplorasi Minyak Cadangan Indonesia Sangat Tinggi*. <http://www.esdm.go.id/berita/migas/40migas/5529lajueksplorasi-cadangan-minyakIndonesia-Sangat-Tinggi.html>. Accessed on January 10th 2017.
- Febriani, N. I., Ridlo, A. & Susanto, A.B. (2014) Potensi Yeast Dalam Fermentasi Alginofit *Sargassum polycystum* C.A Agardh dengan Hidrolisis Asam Sulfat Untuk Pembuatan Bioetanol. *Journal Of Marine Research*. 2 (2): 91-98
- Gunam, I. B. W, Buda, K. & Guna, I.M.Y.S. (2010). Pengaruh Perlakuan Delignifikasi dengan Larutan NaOH dan Konsentrasi Substrat Jerami Padi Terhadap Produksi

-
- Enzim Selulase dari *Aspergillus niger* NRRL A-II, 264. *Jurnal Biologi*. 14 (1): 55-61.
- Kasmiran, A. & Tarmizi (2012) Aktivitas Enzim Selulase dari Kapang Selulolitik pada Substrat Ampas Kelapa. *Jurnal Lentera*. 12 (1): 10-13.
- Khairani, R. (2007) *Tanaman jagung sebagai bahan bio-fuel*. <http://www.macklintmip-unpad.net/Bio-fuel/Jagung/Pati.pdf>. Accessed on July, 15th 2016.
- Kodri, B. D.A. & Yulianingsih, R. (2013). Pemanfaatan Enzim Selulase dari *Trichoderma reesei* dan *Aspergillus niger* sebagai Katalisator Hidrolisis Enzimatik Jerami Padi dengan *Pretreatment* Microwave. *Jurnal Bioproses Komoditas Tropis*. 1 (1): 36-43.
- Pujiarti, R., Kiswardianta, B & Solikati, W. (2014) Pengaruh konsentrasi dan Lama Inkubasi Terhadap Aktifitas Enzim Selulase dari Kapang *Aspergillus niger*". *Jurnal LPPM*. 2 (1).
- Safaria, S., Idiawati, N. & Zaharah, T.A. (2013). Efektivitas Campuran Enzim Selulase dari *Aspergillus niger* dan *Trichoderma reesei* dalam Menghidrolisis Substrat Sabut Kelapa. *JKK*. 2 (1): 46-51.
- Saputra, D. R., Ridlo, A. & Widowati, I. (2012) Kajian Rumput Laut *Sargassum duplicatum* J. G. Agardh Sebagai Penghasil Bioetanol dengan Proses Hidrolisis Asam dan Fermentasi. *Journal Of Marine Research*. 1 (2): 141-151.
- Sari, R. N., Utomo, B.S.B. & Tambunan, A.H. (2014) Kondisi Optimum Produksi Bioetanol Dari Rumput Laut Coklat (*Sargassum duplicatum*) Menggunakan *Trichoderma viride* dan *Pichia angophorae*". *JPB Perikanan*. 9 (2): 121-132.
- Zely, F. D. (2014) *Pengaruh Waktu dan Kadar Saccharomyces cerevisiae Terhadap Produksi Etanol dari Serabut Kelapa pada Proses Sakarifikasi dan Fermentasi Simultan dengan Enzim Selulase*. Studi Pendidikan Kimia Universitas Bengkulu.

HASIL CEK_PRODUCTION OF BIOETHANOL FROM SARGASSUM CRASSIFOLIUM USING SELLULASE ENZYMES FROM TRICHODERMA RESEEI AND ASPERGILLUS NIGER

ORIGINALITY REPORT

6%

SIMILARITY INDEX

3%

INTERNET SOURCES

5%

PUBLICATIONS

1%

STUDENT PAPERS

PRIMARY SOURCES

- 1 Citarsa, I B F, I N W Satiawan, I K Wiryajati, and Supriono. "Performance analysis of cascaded h-bridge multilevel inverter using mixed switching frequency with various dc-link voltages", IOP Conference Series Materials Science and Engineering, 2016.
Publication 1%
- 2 Anggraeni Kusuma Wardani, Retno Herrani. " Bioethanol from Using Acid Hydrolysis and Fermentation Method Using Microbial Association ", Journal of Physics: Conference Series, 2019
Publication 1%
- 3 www.neliti.com
Internet Source 1%
- 4 eprints.ums.ac.id
Internet Source 1%
- 5 Chen Zhao, Lu Deng, Hao Fang. "Mixed culture of recombinant Trichoderma reesei 1%

and *Aspergillus niger* for cellulase production to increase the cellulose degrading capability", *Biomass and Bioenergy*, 2018

Publication

6

U. Ahmad, E. Darmawati, F.E. Munanda.
"APPLICATION OF SEMI-CUTTING AND
WAXING IN LOW TEMPERATURE STORAGE OF
MANGOSTEEN", *Acta Horticulturae*, 2013

Publication

1 %

Exclude quotes On

Exclude matches Off

Exclude bibliography On