

Automatic Tourism Waste Selection Using Image Digital And Artificial Intelligence (Ai)

Muh Janwar Bakir¹, Haris Imam Karim Fathurrahman²

^{1,3}Department of Electrical Engineering, Universitas Ahmad Dahlan, Indonesia

ARTICLE INFORMATION

Article History:

Received Month xx, 20xx

Revised Month xx, 20xx

Accepted Month xx, 20xx

Keywords:

Image Digital;

Arduino;

Object detection;

Waste;

Artificial intelligence;

Corresponding Author:

Haris Imam Karim Fathurrahman,
Department of Electrical Engineer,
Universitas Ahmad Dahlan,
Jl. Ringroad Selatan, Kragilan,
Tamanan, Banguntapan, Bantul,
Daerah Istimewa Yogyakarta,
Indonesia

Email:

haris.fathurrahman@te.uad.ac.id

<https://doi.org/10.52465/josce.v5i1.298>

This work is licensed under a Creative Commons Attribution-Share Alike 4.0



ABSTRACT

Garbage is leftovers or discarded items that are no longer used and are no longer used by their owners. Waste is generally divided into two, namely organic and inorganic waste. Both of these wastes have benefits for us, but they also have an impact on the environment. Organic waste is waste that comes from the remains of living creatures (nature) such as animals, humans, plants that are experiencing decay or weathering. This waste is classified as environmentally friendly waste because it can be broken down by bacteria naturally and quickly.

The research object studied in this research is camera detection on a waste detection tool using a camera which aims to detect types of tourism waste, where in this research I will conduct research on the detection of organic and non-organic tourism waste. The waste problem in Indonesia is caused by an increase in waste produced by the community, a lack of rubbish disposal sites (TPS), the spread of insects and rats due to rubbish, as well as environmental pollution through land, water and air pollution. So it is hoped that this tool will be able to reduce the waste problem in Indonesia, especially in the tourism environment.

In this study, an average value of 0.83% was obtained, where the results were in accordance with the initial target when starting training and carrying out detection. This makes it possible to move the servo more accurately because the detection results have a high value.

From the test results above, an accuracy of 90% was obtained, and the results of the servo movement were in accordance with the detection results, where if the results were organic waste detection, the servo would rotate 90 degrees and if the detection results were non-organic, the servo would not move or remain in the 0 degree position. There was no error in servo accuracy, but the error in detection was 10% from 20 samples which resulted in the servo moving in the direction of the servo movement in the error detection direction.

Citation Document:

Author 1 and Author 2, "Title," *Buletin Ilmiah Sarjana Teknik Elektro*, vol. 3, no. 1, pp. xx-xx, 2021. DOI: [10.12928/biste.v3i1.xxx](https://doi.org/10.12928/biste.v3i1.xxx)

1. INTRODUCTION

Garbage is leftovers or discarded items that are no longer used and are no longer used by their owners. Waste is generally divided into two, namely organic and inorganic waste. Both of these wastes have benefits for us, but they also have an impact on the environment. Organic waste is waste that comes from the remains of living creatures (nature) such as animals, humans, plants that are experiencing decay or weathering. This waste is classified as environmentally friendly waste because it can be broken down by bacteria naturally and quickly.

Waste is an unsolved problem in human life. Many of the problems caused by waste actually come from humans' attitudes that don't care about the environment. Several solutions have been proposed to solve and avoid the problem of this waste, one of which is creating waste detection that can be applied directly to certain devices.

The waste problem is never-ending. The problems being faced are not only in Indonesia, but throughout the world. Waste production continues to increase along with population growth, changes in consumption patterns and people's lifestyles. Identified problems include increasing the amount of waste generation, types and diversity of waste characteristics. The next problem is related to the community's paradigm towards waste (management), to the existence of regulations related to waste management. In developed countries, various efforts have been made to overcome this problem. The birth of the 3R concept which was adopted by Indonesia to become the 3M Principles [1]. In Indonesia, the waste problem is caused by the increase in waste produced by society, lack of rubbish disposal sites (TPS), the spread of insects and rats due to rubbish as causes of disease, then environmental pollution through land, water and air pollution which causes reduced public health. Environmental problems are an issue that cannot be avoided. Currently, waste is a very serious environmental problem faced by Indonesian society in general. It could be said that waste is produced every day by housewives, both organic and inorganic waste. However, what is worrying is that the waste produced is thrown carelessly in various places, and the effect will damage the surrounding environment. The amount of waste produced each year will increase along with the increase in population.

The current government has tried in various ways to overcome the waste problem. Especially the problem of inorganic waste. However, it has not yet reached the point of perfection. This is because the amount of waste in Indonesia is very high. So the government has difficulty determining the right way to solve it.

Awareness and concern for handling waste by the hamlet community is still very lacking. The habit of burning rubbish is still ingrained in village communities in dealing with rubbish problems. Apart from that, people feel that burning rubbish is the quickest way to deal with this problem. Not only that, there are still people who throw their rubbish directly into water bodies without thinking about the accumulation of rubbish downstream of the water body and also the pollution in the water body due to the rubbish they throw away. The availability of large and large amounts of empty land also makes people lulled into not managing their waste and only relying on that land to handle their waste [2].

Apart from that, trash also becomes a living place for germs. One of the most important objects in waste management is tourism objects. Where in Indonesia you really need to pay attention besides the tourist attractions that make Indonesia proud in the eyes of the world. The problem of waste at tourist attractions has from the past until now is still a hot topic in the world of tourism. The impact of the accumulation of rubbish in tourist areas is felt by the surrounding environment. Starting from pollution of marine ecosystems, air pollution, to direct impacts on human health. If this waste is just left there, it will have a bad impact in the future. If you look at Republic of Indonesia Law Number 10 of 2009 concerning Tourism, it is stated that everyone is obliged to maintain and preserve tourist attractions. Apart from that, everyone is also obliged to participate in helping to create a safe, orderly, clean atmosphere, behave politely, and maintain the environmental sustainability of tourism destinations [3]. One of the obstacles in Indonesia is the difficulty of sorting types of waste, one of which is organic and inorganic waste which makes waste processing difficult. The waste disposal methods that are still commonly used in Indonesia are open dumping and landfill, but these methods are not optimal[4].

2. METHODS

The research methodology used in this research uses artificial intelligence[5]–[20] and digital image[9], [14], [21]–[26] by utilizing object detection. The proposed system uses a unique data processing strategy, which includes sampling data multiple times, to develop a robust model with fewer annotations, and a single-stage object detection model, YOLOv8 (You Only Look Once Version 8)[27], [28]. This research process is generally depicted in Figure 1 below

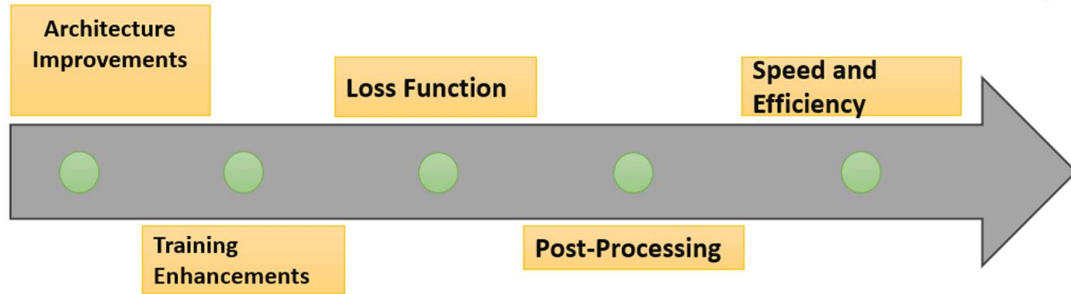


Figure 1.method yolov8 detection

Architecture Improvements

Architecture Improvement is grouped into 3 parts, namely:

Efficient Backbone Network: The backbone network is responsible for feature extraction from images. YOLOv8 utilizes an optimized backbone, often based on CSP (Cross Stage Partial) connections, which enhance gradient flow and reduce the number of parameters.

Feature Pyramid Networks (FPN): These are used to better handle objects at different scales by combining features from different layers.

Spatial Pyramid Pooling (SPP): This layer helps in aggregating global context information without losing spatial resolution.

Training Enhancements


Ar Architecture Improvement is grouped into 3 parts, where in this process the block diagram is included in this part, namely:

Label Smoothing: This technique prevents the model from becoming overly confident about its predictions, which can help improve generalization.

Mosaic Data Augmentation: This augmentation technique stitches together four different images during training, which improves the model’s robustness to various object sizes and occlusions.

Adaptive Training Strategies: YOLOv8 uses advanced training strategies that adjust learning rates and other hyperparameters dynamically during training for better convergence. block diagram can be viewed in figure 2. flowchart can be viewed in figure 3. wiring can be viewed in figure 4.

Figure 2. block diagrams

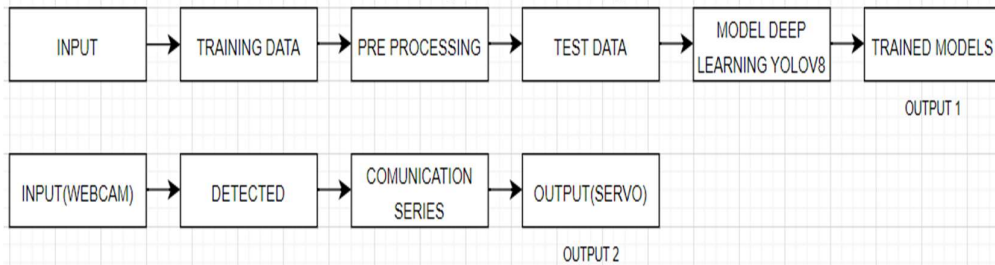

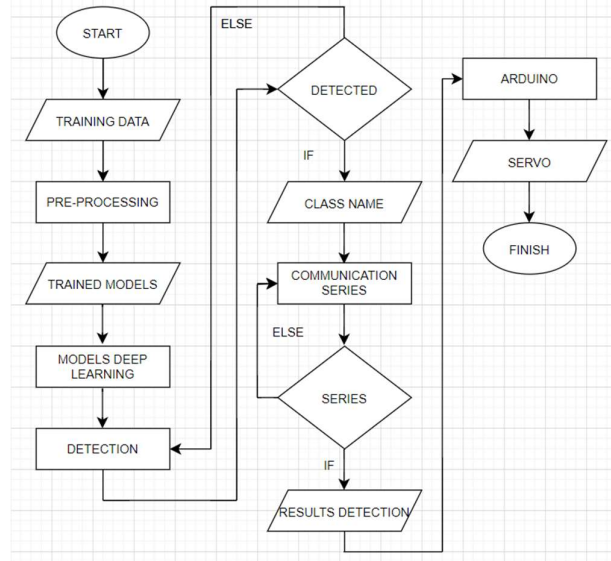


Figure 3. Flowchart

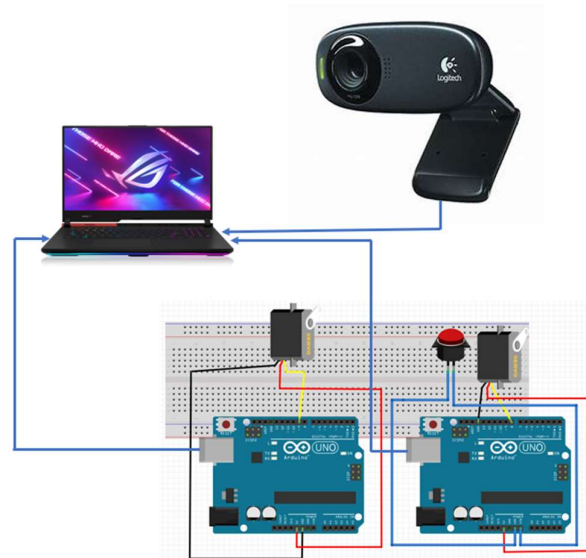


Figure 3. wiring detection and move servo

Loss Function

YOLOv8 employs a sophisticated loss function that balances classification, localization, and confidence loss. This ensures that the model not only detects objects accurately but also precisely localizes them. Loss function can be viewed in figure 3.



(a) (b)
Figure 5. loss function

Post-Processing

- **Non-Maximum Suppression (NMS):** This technique is used to remove duplicate detections of the same object. YOLOv8 uses improved NMS algorithms to handle overlapping boxes more effectively.
- **Soft-NMS:** An enhancement over traditional NMS, which reduces the confidence of overlapping boxes instead of discarding them outright, leading to better performance in crowded scenes.

Speed and Efficiency

YOLO models are known for their real-time performance, and YOLOv8 continues this tradition by optimizing the inference speed without significant loss of accuracy. This makes YOLOv8 suitable for applications where both speed and accuracy are crucial, such as autonomous driving, surveillance, and robotics. In this section, implementation will be carried out to determine detection accuracy can be viewed in figure 4.


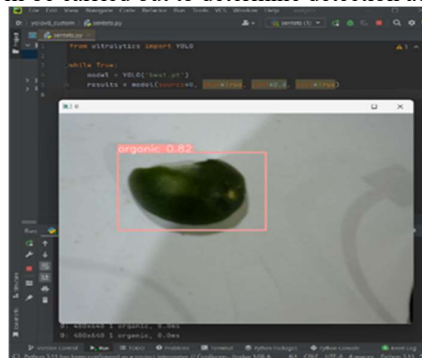


Figure 6. implementation


3. RESULT AND DISCUSSION

3.1. Comparison of training and detection of yolov8 and yolov5

The results of this research were concluded using the yolo5 and yolov8 methods where detection comparison is shown in table 1. The reading and training results using the yolov8 and yolov5 methods are shown in the figure 7.

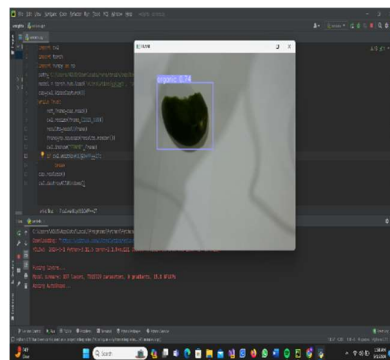

(a)

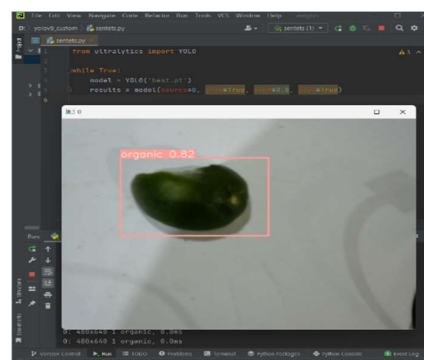

(b)

mAP 50 yolov5	mAP 50-95 yolov5	mAP 50 yolov8	mAP 50-95 yolov8
0.995	0.828	0.995	0.855

Figure 7. comparison yolov5 and yolov8

Based on Figure 5, detection will continue to run in real time with a sample test of 20 objects

Table 1. comparison Detection accuracy data

Yolov8	Yolov5	Difference
0.82	0.74	0.08
0.83	0.29	0.54
0.82	0.36	0.46
0.80	0.48	0.32
0.83	0.44	0.39
0.86	0.45	0.41
0.80	0.76	0.04
0.81	0.36	0.45
0.81	0.42	0.39
0.80	0.51	0.29
0.81	0.82	0.01
0.91	0.81	0.10
0.84	0.38	0.51
0.82	0.83	0.01
0.80	0.41	0.45
0.86	0.40	0.40
0.89	0.59	0.30
0.83	0.52	0.31
0.84	0.63	0.21
0.82	0.39	0.42
Average		0.3045

Figure 8 shows a comparison of the accuracy of the yolov5 and yolov8 methods. using yolov8 can increase detection accuracy as shown in figure 8.

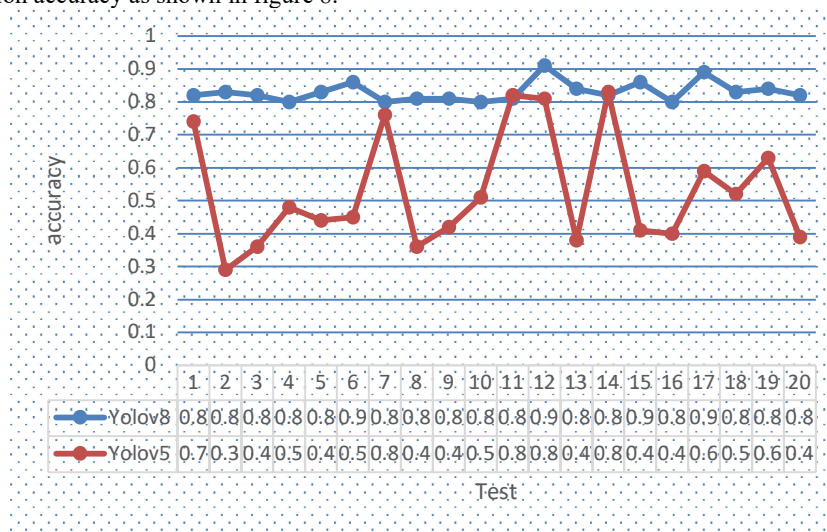


Figure 8. Grafic accuracy comparison

3.2. Testing trash object detection with yolov8

Object detection testing based on waste type was carried out to determine the accuracy value of the datasheet values of 240 images. The experiment was carried out with 20 samples to regulate the servo rotation which functions to open the trash box door. using yolov8 can increase detection accuracy as shown in figure 9. The results of this research were concluded using the yolov8 methods where detection is shown in table 2.

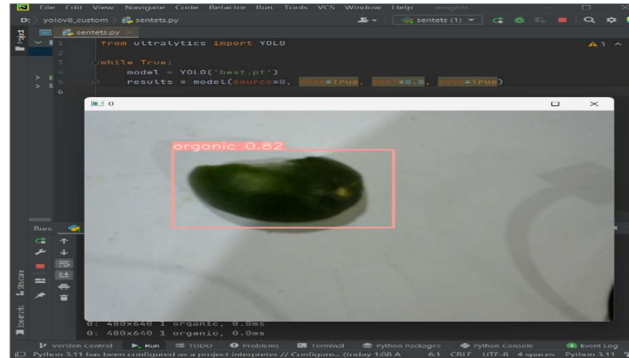


Figure 9. object detection

Table 2. results using yolov8

No	Results detection
1	0.82
2	0.83
3	0.82
4	0.80
5	0.83
6	0.86
7	0.80
8	0.81
9	0.81
10	0.80
11	0.81
12	0.91
13	0.84
14	0.82
15	0.80
16	0.86
17	0.89
18	0.83
19	0.84
20	0.82
Average	0.83

Figure 10 shows the results of yolov8. using yolov8 can improve detection accuracy as shown in figure 10.

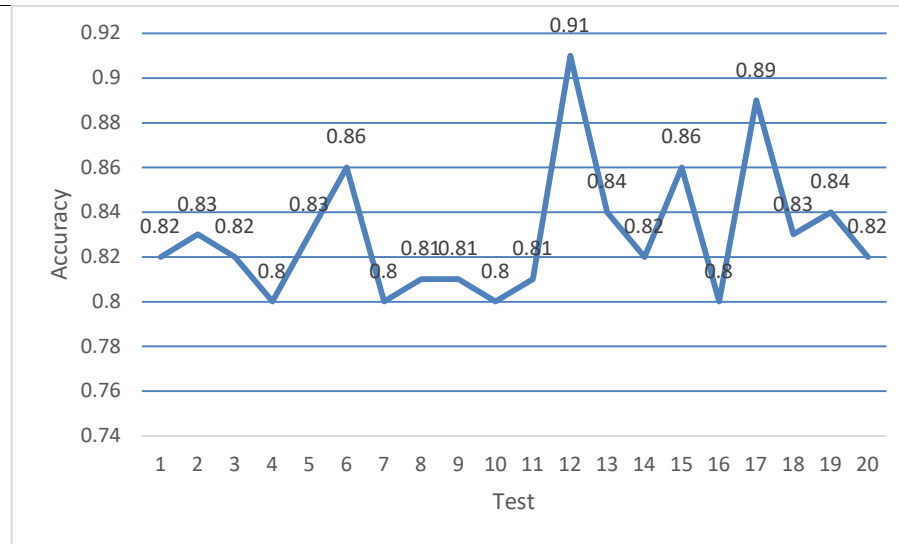


Figure 10. Grafic accuracy

3.3. Servo motion and accuracy testing based on detection results

Servo movement and accuracy testing based on detection results is carried out to determine the accuracy value of the detection test value, so as to regulate the rotation of the servo which functions to open the trash box door where the first door will open based on the detection results, namely if the organic waste detection results, the servo will rotate 180 degrees and if the detection results are non-organic then the servo will not move or remain in the 0 degree position. The servo motion test results are shown in Figure 11.

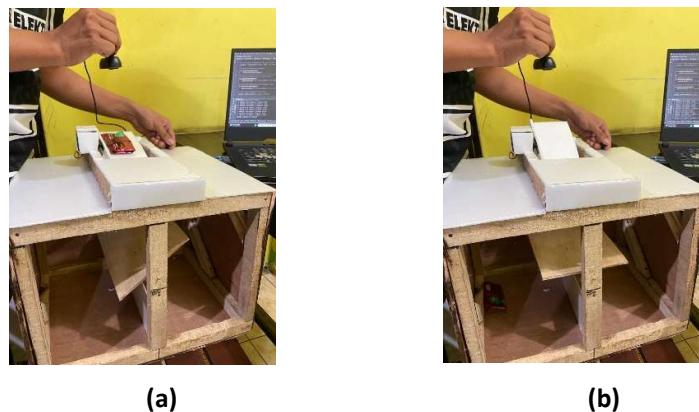


Figure.10. The servo motion test results

From the test results above, an accuracy of 90% was obtained, and the results of the servo movement were in accordance with the detection results, where if the results were organic waste detection, the servo would rotate 90 degrees and if the detection results were non-organic, the servo would not move or remain in the 0 degree position. There was no error obtained in servo accuracy, but the error in detection was found to be 10% from 20 samples which resulted in the servo movement moving in the direction of the servo movement in the error detection direction.

4. CONCLUSIONS

Based on the results of this test, we get optimal accuracy and results, shown in detection results which are not far from training accuracy. The hope is that the next development will be more complex with a higher version of Yolo.

ACKNOWLEDGEMENT



The author would like to express his deepest gratitude to the Electrical Engineering Study Program at Ahmad Dahlan University for its support in providing a computer environment and automation laboratory access, especially to the supervisor in this research. The author also would like to thank all colleagues who helped accompany this research process.

REFERENCES

- [1] M. A. Nahdi, T. Y. Putro, and Y. Sudarsa, "IoT Based Hydroponic Plant Nutrient Monitoring and Control System," *Pros. Ind. Res.*, pp. 201–207, 2019, [Online]. Available: <https://jurnal.polban.ac.id/proceeding/article/view/1390>
- [2] A. Taufiq and F. M. Maulana, "Sosialisasi Sampah Organik dan Non Organik serta Pelatihan Kreasi Sampah," *J. Inov. dan Kewirausahaan*, vol. 4, no. 1, pp. 68–73, 2015, [Online]. Available: <https://journal.uii.ac.id/ajie/article/view/7898>
- [3] D. G. Rudy and I. D. A. D. Mayasari, "Prinsip - Prinsip Kepariwisata dan Hak Prioritas Masyarakat dalam Pengelolaan Pariwisata berdasarkan Undang - Undang Nomor 10 Tahun 2009 Tentang Kepariwisata," *J. kertha wicaksana*, vol. 13, no. 10, pp. 73–84, 2019.
- [4] L. Priatna, W. Hariadi, and E. K. Purwendah, "'Pengelolaan Sampah di Tempat Pembuangan Akhir (TPA) Gunung Tugel, Desa Kedungrandu, Kecamatan Patikraja, Kabupaten Banyumas,'" *Pros. Semin. Nas. dan Call Pap.*, vol. 9, no. 1, pp. 494–501, 2019.
- [5] A. Rohman, J. Aditama, M. B. Arifin, R. Rahmawati, and S. Sendari, "Rancang Bangun Smart Cleaner Robot sebagai Robot Pengambil dan Pemilah Sampah," *Semin. Nas. Fortei7*, pp. 353–358, 2018.
- [6] O. Rahmalisty, "Perancangan Language Translator Image To Text Menggunakan Metode Optical Character Recognition Berbasis Pengolahan Citra Language Translator Image To Text Design Using Optical Character Recognition Method Based On Image Processing," vol. 9, no. 1, pp. 187–195, 2023.
- [7] O. D. S. Sunanto and P. H. Utomo, "Implementasi Deep Learning Dengan Convolutional Neural Network Untuk Klasifikasi Gambar Sampah Organik Dan Anorganik," *Pattimura Proceeding Conf. Sci. Technol.*, vol. 1, no. 2, pp. 335–340, 2022, [Online]. Available: <https://jurnal.unej.ac.id/index.php/prosiding/article/view/33527>
- [8] Preetiyanka, B. Raj, M. Devi, and B. Raj, "Face Mask Detection Using Artificial Intelligence," *AI Big Data-Based Eng. Appl. from Secur. Perspect.*, vol. 17, no. 3, pp. 129–164, 2023, doi: 10.1201/9781003230113-6.
- [9] M. Resa Arif Yudianto, P. Sukmasetya, R. Abul Hasani, and D. Sasongko, "Pengaruh Data Preprocessing terhadap Imbalanced Dataset pada Klasifikasi Citra Sampah menggunakan Algoritma Convolutional Neural Network," *Build. Informatics, Technol. Sci.*, vol. 4, no. 3, pp. 1367–1375, 2022, doi: 10.47065/bits.v4i3.2575.
- [10] R. Permana, H. Saldu, and D. I. Maulana, "Optimasi Image Classification Pada Jenis Sampah Dengan Data Augmentation Dan Convolutional Neural Network," *J. Sist. Inf. dan Inform.*, vol. 5, no. 2, pp. 111–120, 2022, doi: 10.47080/simika.v5i2.1913.
- [11] R. Y. Endra, A. Cucus, F. N. Afandi, and M. B. Syahputra, "Deteksi Objek Menggunakan Histogram of Oriented Gradient (Hog) Untuk Model Smart Room," *Explor. J. Sist. Inf. dan Telemat.*, vol. 9, no. 2, 2018, doi: 10.36448/jsit.v9i2.1075.
- [12] P. Nyoman and Putu Kusuma Negara, "Deteksi Masker Pencegahan Covid19 Menggunakan Convolutional Neural Network Berbasis Android," *J. RESTI (Rekayasa Sist. dan Teknol. Informasi)*, vol. 5, no. 3, pp. 576–583, 2021, doi: 10.29207/resti.v5i3.3103.
- [13] M. Fahmi and A. Yudhana, "Pemilahan Sampah Menggunakan Model Klasifikasi Support Vector Machine Gabungan dengan Convolutional Neural Network," *J. Ris. Komputer*, vol. 10, no. 1, pp. 2407–389, 2023, doi: 10.30865/jurikom.v10i1.5468.
- [14] A. J. Rindengan and M. Mananohas, "Perancangan Sistem Penentuan Tingkat Kesegaran Ikan Cakalang Menggunakan Metode Curve Fitting Berbasis Citra Digital Mata Ikan," *J. Ilm. Sains*, vol. 17, no. 2, p. 161, 2017, doi: 10.35799/jis.17.2.2017.18128.
- [15] E. L. Frannita and N. Putri, "Implementation of Artificial Intelligence on the Development of Automatic Leather Product Industrial Waste Detection System Implementasi Artificial Intelligence Pada Pengembangan Sistem Deteksi Limbah Industri Produk Kulit Otomatis," *Berk. Penelit. Teknol.*, vol. 21, pp. 184–195, 2022.
- [16] "DEEP LEARNING OBJECT DETECTION PADA VIDEO," 2018.
- [17] Bambang Pilu Hartato, "Penerapan Convolutional Neural Network pada Citra Rontgen Paru-Paru untuk Deteksi SARS-CoV-2," *J. RESTI (Rekayasa Sist. dan Teknol. Informasi)*, vol. 5, no. 4, pp. 747–759, 2021, doi: 10.29207/resti.v5i4.3153.
- [18] K. Mughtar, N. T. Anshari, C. Chairuman, K. Alhabibie, and K. Munadi, "Rancang Bangun Purwarupa Pemilah Sampah Pintar Berbasis Deep Learning," *J. Teknol. Inf. dan Ilmu Komput.*, vol. 9, no. 3, p. 655, 2022, doi: 10.25126/jtiik.2022934976.
- [19] C. G. Wahyu Pramana, D. Care Khrisne, and N. Putra Sastra, "Rancang Bangun Object Detection Pada Robot Soccer Menggunakan Metode Single Shot Multibox Detector (Ssd Mobilenetv2)," *J. SPEKTRUM*, vol. 8, no. 2, p. 28, 2021, doi: 10.24843/spektrum.2021.v08.i02.p4.
- [20] S. K. Dirjen *et al.*, "Deteksi Buah untuk Klasifikasi Berdasarkan Jenis dengan Algoritma CNN Berbasis

- YOLOv3,” *Masa Berlaku Mulai*, vol. 1, no. 3, pp. 476–481, 2017.
- [21] R. S. Hadikusuma and R. Rahmadewi, “Analisis Transmisi Data Citra Digital Esp 32 Cam Pada Prototipe Robot Pemadam Api Menggunakan Metode Kompresi Citra Mjpg,” *Barometer*, vol. 8, no. 1, pp. 1–8, 2023, doi: 10.35261/barometer.v8i1.6401.
- [22] A. Borrego, “Pengolahan Citra Digital Pada Sistem Pendeteksi Pelanggaran Lalu Lintas Di Zebra Cross Pada Traffic Light Dengan Pendeteksi Plat Nomor Kendaraan Berbasis Raspberry Pi,” vol. 10, p. 6, 2021.
- [23] S. Ratna, “Pengolahan Citra Digital Dan Histogram Dengan Phyton Dan Text Editor Phycharm,” *Technol. J. Ilm.*, vol. 11, no. 3, p. 181, 2020, doi: 10.31602/tji.v11i3.3294.
- [24] H. Akbar, D. Aryani, and B. Ulum, “Deteksi Banjir Area Perkotaan Berbasis Citra Digital dan Convolutional Neural Network (VGG19),” *J. Tek. Mesin, Elektro, dan Ilmu Komput.*, vol. 2, no. 3, pp. 82–91, 2022.
- [25] N. T. S. Saptadi, P. Chyan, and V. M. Widjaja, “Desain Model Klasifikasi Sampah Organik Menjadi Bahan Baku Briket Biomassa Menggunakan Metode Deep Learning,” *JIKO (Jurnal Inform. dan Komputer)*, vol. 6, no. 2, p. 160, 2022, doi: 10.26798/jiko.v6i2.559.
- [26] S. S. Panna and Betrisandi, “Klasifikasi Kelompok Usia Melalui Citra Wajah Berbasis Image Texture Analysis pada Sistem Automatic Video Filtering,” *J. RESTI (Rekayasa Sist. dan Teknol. Informasi)*, vol. 3, no. 3, pp. 429–434, 2019, doi: 10.29207/resti.v3i3.1280.
- [27] Y. Yanto, F. Aziz, and I. Irmawati, “Yolo-V8 Peningkatan Algoritma Untuk Deteksi Pemakaian Masker Wajah,” *JATI (Jurnal Mhs. Tek. Inform.)*, vol. 7, no. 3, pp. 1437–1444, 2023, doi: 10.36040/jati.v7i3.7047.
- [28] A. Aboah, B. Wang, U. Bagci, and Y. Adu-Gyamfi, “Real-time Multi-Class Helmet Violation Detection Using Few-Shot Data Sampling Technique and YOLOv8,” *IEEE Comput. Soc. Conf. Comput. Vis. Pattern Recognit. Work.*, vol. 2023-June, pp. 5350–5358, 2023, doi: 10.1109/CVPRW59228.2023.00564.

AUTHOR BIOGRAPHY

	<p style="text-align: center;">Muh Janwar Bakir</p>
	<p style="text-align: center;">Haris Imam Karim Fathurrahman, S.Pd., M.Sc.</p>